

CP 3 1/8
417

EIR-Bericht Nr. 332

Eidg. Institut für Reaktorforschung Würenlingen
Schweiz

Fast Reactors Using Molten Chloride Salts as Fuel

Final Report (1972-1977)

M. Taube



Würenlingen, Januar 1978

**FAST REACTORS USING
MOLTEN CHLORIDE SALTS AS FUEL**

FINAL REPORT (1972 - 1977)

prepared by H. Taube

**SWISS FEDERAL INSTITUTE FOR REACTOR RESEARCH
CH-5303 Würenlingen**

Januar 1978

Co-authors and contributors to this work

Physics, Neutronics

J. Ligou

Cross sections and codes

E.H. Ottewitte

J. Stepanek

Thermohydraulics

K.H. Bucher

M. Dawudi

Chemistry and experimental

Dr. E. Janovici

Dr. M. Furrer

Other assistance

Programming - S. Padyiath

Code operations - B. Mitterer

Text preparation - R. Stratton

Support and encouragement

Prof. H. Gränicher

EIR, Würenlingen

Dr. P. Tempus

EIR, Würenlingen

Dr. J. Peter

EIR, Würenlingen

Dr. H. Schumacher

EIR, Würenlingen

Support and encouragement

P. Fougères

Fontenay aux Roses - France

J. Smith

Winfrith U.K.

G. Long

Harwell U.K.

L.E. McNeese

Cak Ridge National Laboratory U.S.A.

Summary

This report deals with a rather exotic "paper reactor" in which the fuel is in the form of molten chlorides.

- (a) Fast breeder reactor with a mixed fuel cycle of thorium/uranium-233 and uranium 238/plutonium in which all of the plutonium can be burned *in situ* and in which a denatured mixture of uranium-233 and uranium-238 is used to supply further reactors. The breeding ratio is relatively high, 1.58 and the specific power is 0.75 GW(th)/m³ of core.
- (b) Fast breeder reactor with two and three zones (internal fertile zone, intermediate fuel zone, external fertile zone) with an extremely high breeding ratio of 1.75 and a specific power of 1.1 GW(th)/m³ of core.
- (c) Extremely high flux reactor for the transmutation of the fission products: strontium-90 and caesium-137. The efficiency of transmutation is approximately 15 times greater than the spontaneous beta decay. This high flux burner reactor is intended as part of a complex breeder/burner system.
- (d) Internally cooled fast breeder in which the cooling agent is the molten fertile material, the same as in the blanket zone. This reactor has a moderate breeding ratio of 1.38, a specific power of 0.22 GW(th)/m³ of core and very good inherent safety properties.

All of these reactors have the fuel in the form of molten chlorides: PuCl₃ as fissile, UCl₃ as fertile (if needed) and NaCl as diluent. The fertile material can be ²³⁸UCl₃ as fertile and NaCl as diluent. In mixed fuel cycles the ²³³UCl₃ is also a fissile component with ²³²ThCl₄ as the fertile constituent.

In some special cases a hypothetical molten fluoride has been checked using PuF₃ as the fissile, UF₃ as the fertile and NaF and ZrF₄ as the diluents components. In this case one obtains a lower but still respectable breeding ratio of 1.5.

In all cases a directly coupled continuously operating reprocessing plant is proposed. Some of the technological problems of reprocessing are discussed. Furthermore the report touches on some of the difficulties associated with corrosion arising from the use of these molten media coupled with the irradiation effects such as structural damage from fast neutrons.

The thermohydraulic studies show that even under the extreme operating conditions of very high neutron fluxes and high specific power, cooling is possible, in most cases by out-of core cooling but also in one or two cases cooling internally in the core.

Some molten salt reactor specific safety problems are discussed.

The influence of fast neutrons on the chlorine, forming sulphur by the (n,p) reaction has been experimentally investigated and the results are reported briefly.

With this report the work of several years at the Swiss Federal Institute for Reactor Research is brought to a conclusion.

CONTENTS

	<u>page</u>
Forward	8
1. Molten Salt Reactors. General Description	9
1.1 Methods of classification	9
1.2 Method of cooling. External: Internal	9
1.3 Intensity of Neutron Flux	10
1.4 Number of core zones	12
1.5 Type of Fissile Nuclide. Plutonium: Uranium	12
1.6 Neutron energy: Thermal and Fast	12
1.7 Purpose of the reactors	15
1.8 Fuel Components. For Molten Salt, Fluoride and Chloride	16
1.9 Short resume of the classification	16
1.10 Method of Neutronic Calculation	17
2.1 Breeder Reactor with Plutonium Burning <i>in situ</i>	19
2.1.1 Aim of this Concept	19
2.1.2 Reactor in the Build-up Phase	21
2.1.3 The Transient Reactor	29
2.1.4 The steady state reactor	29
2.1.5 Comparison of the three phases	35
2.2 Impact of some parameters on the mixed zone two zone fast breeder	43
2.3 Material balance of the steady state reactor	49
2.4 Conclusions	49
3.1 The Three Zone Reactor	51
3.1.1 Introduction	51
3.1.2 The three zone breeder with thorium/ uranium-233	52
3.2 A Three zone breeder reactor with a mixed fuel cycle U-238/Pu-239 plus Th-232/U-233	52
3.3 The three zone reactor - uranium-plutonium fuel cycle	57
3.4 The three zone breeder reactor: Very high breeding gain	63

	<u>page</u>
3.5 The Two zone fast breeder. Fuel of uranium plutonium fluorides	70
3.5.1 Introduction	70
3.5.2 Arbitrary assumptions and uncertainties	70
3.6 High Flux Reactor with Fluoride Fuel	83
4. A High flux burner reactor for transmutation	85
4.1 Need for fission product transmutation	85
4.1.1 Introduction	85
4.1.2 Why some opinions concerning transmutations in a fission reactor are rather pessimistic	92
4.1.3 Which fission products are suitable candidates for transmutation and in what quantities?	95
4.1.4 In what way could a burner reactor be coupled to a system of breeders?	97
4.1.5 Is the rate of transmutation sufficient?	98
4.1.6 In what reactors is transmutation possible?	106
4.1.7 What are the limitations of a solid fuelled reactor?	108
4.1.8 The liquid-fuelled fast reactor with central thermal zone	113
4.2 The Neutron-physical aspects of the High Flux Reactor (according to Ligou, 1972)	114
4.2.1 Introduction	114
4.2.2 Neutronic calculations	115
4.2.3 Moderation requirements	115
4.2.4 Influence of other parameters	121
4.3 Thermohydraulic considerations	123
4.4 Some results	128
4.6 Comments on hazard coefficients	130
4.7 Secondary processes	134
4.8 Conclusions	135

	<u>page</u>
5. An internally cooled breeder with uranium-plutonium fuel	137
5.1 Design features and objectives	137
5.2 The reference design	141
5.3 Neutron physics	142
5.4 Safety problems, comments	154
6. Chemical and Related Problems	155
6.1 Physical and chemical criteria for slat components	155
6.2 Corrosion of structural material	162
6.2.1 General criteria	162
6.2.2 Molybdenum as structural material	164
6.2.3 The irradiation of molybdenum and iron in a fast high flux reactor	166
6.3 Fission product behaviour in the fuel	167
6.4 Some comments on reprocessing	170
6.5 In core continuous gas purging	172
6.5.1 The proposal	172
6.5.2 Delayed neutron emitters	173
7. Experimental Work (according to Janovici, 1976)	177
7.1 Chemical behaviour of radiosulphur obtained by $^{35}\text{Cl}(n,p)^{35}\text{S}$ during in-pile irradiation	177
7.2 Temperature dependence of sulphur species (according to Furrer, 1977)	180

	<u>page</u>
8. Thermohydraulics	195
8.1 Introduction	185
8.2 High Flux reactor with the core as a spherical shell	195
8.3 Power Reactor with spherical core	189
8.4 The external heat exchanger	191
8.5 The internally cooled reactor	194
9. References	199
9.1 List of EIR publications used in this report (chronological order)	199
9.2 Former publications concerning molten chlorides fast breeders and the fluoride thermal breeder	200
9.3 Publications concerning transmutation	204
9.4 Publications concerning the thorium fuel cycle	206
9.5 References to the experimental work (chemistry)	208
9.6 References to the physics calculations	209

FORWARD

The history of the development of fission reactor concepts using molten salt as fuel media is as old and as complex as the history of the development of nuclear power itself. The ups and downs have followed those of the parent technology but the swings have been if anything more violent. In 1976 for example molten salt technology all but died out but then in 1977 a new attempt at revival was begun this time associated with the new interest in proliferation-proof systems.

The author of the present paper has a profound belief that the concept of molten salt reactors coupled with continuous reprocessing and the associated waste management will become an important feature of nuclear strategy perhaps in 10 or 20 years time.

In this report the efforts in this field over the last six years are summarised.

1. MOLTEN SALT REACTORS. GENERAL DESCRIPTION

1.1 Methods of classification

There are many ways of classifying a reactor type. One such possibility is shown here.

- a) Method of cooling
- b) Flux intensity, related also to specific power density
- c) Number of zones in the reactor
- d) Kind of fissile nuclides and fuel cycles
- e) Neutron energy
- f) Purpose of the reactor
- g) Diluent for the molten salt

It is clear that such an arbitrary classification is not necessarily internally compatible and not all reactor types fall easily into the scheme chosen.

1.2 Method of cooling. External: Internal

Molten fuel reactors differ from the point of view of the cooling system. The following are three types of molten fuel reactors:

Externally cooled, where the molten fuel is pumped out of the core to the external heat exchanger. In this type of reactor, only fuel and fertile material are present in the core (no coolant). The large amount of molten fuel outside the core does not of course contribute to the critical mass.

This type of reactor has been discussed for example by Nelson, (Argonne 1967) and Lane (USA 1970) especially as a high flux materials testing fast reactor.

In externally cooled fast reactors the loss of a portion of the delayed neutrons could adversely affect reactor control. Also the biological shielding outside the core is very expensive. In this paper most of the reactors discussed are externally cooled.

Internally, direct cooled reactors: here the cooling agent is pumped directly into the core where, after mixing, the fuel in the lower part of the core is separated and pumped out of the core to the heat exchanger. The direct contact of molten fuel with molten coolant has several particular advantages: very good heat transfer, no coolant tubes (or cladding), possibility of transporting fission products.

The disadvantages are unfortunately, also numerous: problems of mixing and separating the fuel and coolant, corrosion, etc. This type of reactor has also been studied, e.g. cooled by molten lead (Long, Harwell and Killingback, Winfrith 1967), cooled by boiling mercury (Taube, Warsaw 1966) and cooled by boiling aluminium chloride (Taube, Warsaw 1966). This type of reactor must be considered as an "extremely exotic type", and only some references are given here.

Internally indirectly cooled reactor: here the cooling agent flows through tubes in the core. Heat is transferred from fuel to coolant across the tubes. No direct contact between molten fuel and liquid or gaseous coolant is permitted. These types have also been studied, in most cases using sodium as a coolant, (Nelson, Argonne 1967) or molten chlorides of uranium (Taube, 1970). See Fig. 11.

1.3 Intensity of neutron Flux




The molten salt reactors discussed here can be used for two more or less quite different purposes.

- power production and fissile breeding, which is self evident
- neutron production for nuclear transmutation of the long radionuclides produced in power reactors.

In this report both types have been considered

- power breeding reactors with a mean power level of approx 3 GW(th) and steam production with over critical parameters.
- burner reactors with a very high neutron flux particularly in the internal zone for neutron moderation when the thermal flux reaches $3 \times 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$.

Fig. 1.1 TYPES OF REACTOR COOLING SYSTEMS

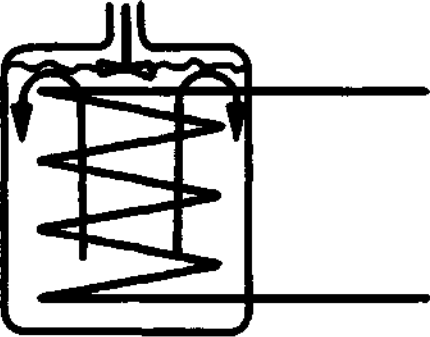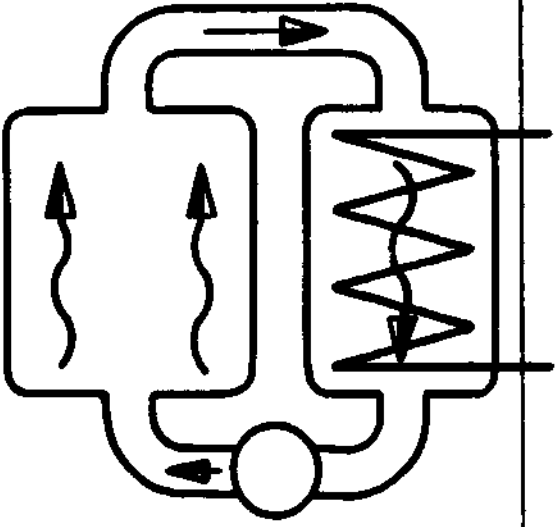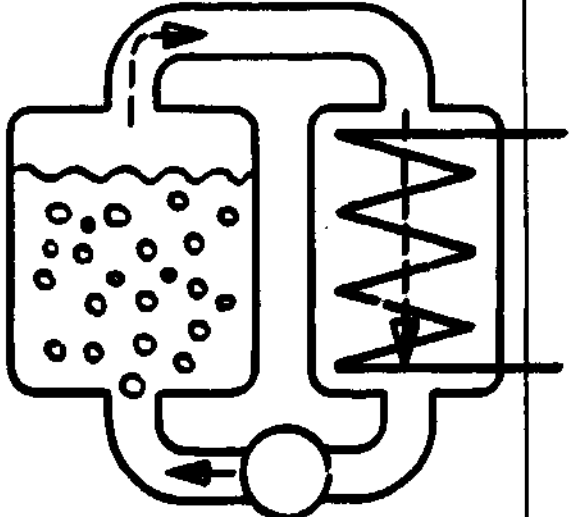TYPE	SCHEME	CHAPTER
INTERNAL INDIRECT COOLING		CHAPTER 5
EXTERNAL INDIRECT COOLING		CHAPTER 2, 3, 4
INTERNAL DIRECT COOLING (BOILING)		here not discussed

1.4 Number of core zones

The division of the reactor into several zones must be considered from the point of view of neutronics, thermohydraulics and safety.

The organisation of multiple zones is easier in the case of molten fuel reactors than for solid fuel reactors. In this report two types are discussed

- with two zones
- with three zones including outer and inner fertile zone, (see Fig. 1.2).

1.5 Type of Fissile Nuclide. Plutonium: Uranium

The fast reactors show excellent neutron properties, not only for the fuel cycle:




Uranium -238/Plutonium but also
Thorium -232/Uranium-233

Also a mixed fuel cycle of both types has some special advantages. Fig. 1.3 shows the nuclear properties of the fissile nuclides.

1.6 Neutron energy: Thermal and Fast

The reactors discussed here are all fast reactors. Thermal reactors however have also been extensively and intensively investigated during the 1960's and 1970's in Oak Ridge National Laboratory USA. (Rosenthal et al, 1972)

Fig. 1.2 TYPES OF REACTORS

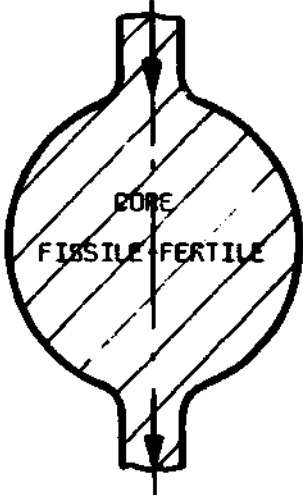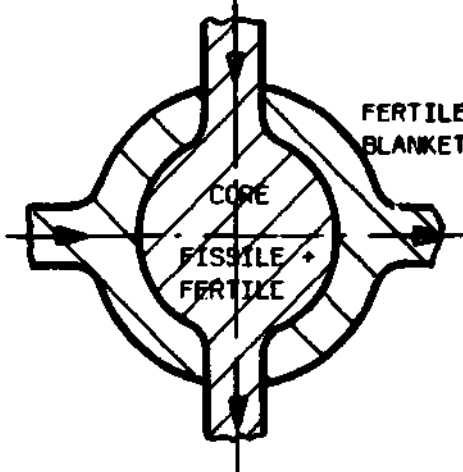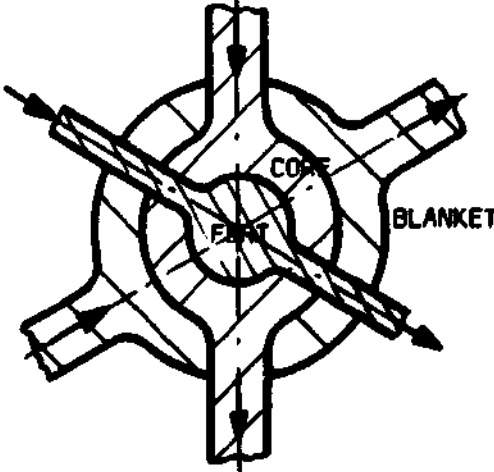NUMBER ZONE	GEOMETRY	PROPERTIES	
		POSITIVE	NEGATIVE
ONE		SIMPLICITY OF TECHNOLOGY	RELATIVELY LOW BREEDING RATIO, BECAUSE OF TOO SOFT NEUTRON-
TWO		THE OPTIMAL DESIGN	
THREE		GOOD USE OF NEUTRONS	THE GEOMETRY IS VERY COMPLEX THE NEUTRON FLUX DISTRIBUTION IS DISTURBED

1.7 Purpose of the reactors

The principle purposes of the large reactors proposed can be classified as follows. (Table 1.1)

Table 1.1

Reactor type	Primary Aim	Secondary Aim	Comments to be found in chapter
Power	Electrical energy $T > 600^{\circ}\text{C}$	Production of fissile nuclides $SR > 1$	ch.5
Breeder	Production of fissile nuclide B.R. \sim optimum	Production of electrical energy	ch.3
High flux	Neutron Flux ϕ ($\text{n cm}^{-2}\text{s}^{-1}$) $> 10^{16}$ for transmutation	Production of electrical energy	ch.4
High Temperature	$T > 850^{\circ}\text{C}$ for chemical reactions	Production of electrical energy	not discussed here
Non-proliferating	Maximum security. No plutonium output	Production of electrical energy	ch.2
Propulsion	Heat for steam turbine		not discussed here
Space Heating	Heat with $100^{\circ}\text{C} < T < 200^{\circ}\text{C}$		not discussed here

1.8 Fuel Components. For Molten salt, fluoride and chloride

In the thermal molten salt reactor the best fuel compound is undoubtedly the fluoride.

For fast reactors the use of chlorine as the compound seems to be preferable but the use of fluorine (as zirconium and sodium fluoride) as diluent is not excluded.

1.9 Short resumé of the classification

Table 1.2 brings together all these characteristics in an attempt at classification.

Table 1.2

		This work:	
		yes	no
Method of Cooling	External	x	
	Internal Direct		x
	Internal Indirect	x	
Flux Intensity	High	x	
	Low	x	
Number of zones	One		x
	Two	x	
	Three	x	
Fissile	Plutonium	x	
	Uranium	x	
	Mixed	x	
Energy of Neutrons	Thermal		x
	Intermediate		x
	Fast	x	
Aim	Power	x	
	Breeder	x	
	High Flux burner	x	
Dilutents	Fluoride	x	
	Chloride	x	

1.10 Method of Neutronic Calculation

Almost all results given here have been obtained using the following calculational method

- the reactor code: ANISN
- number of zones: 5, 6 or 7
- 40 - 100 spatial positions
- order of quadrature S_4 checked by S_8
- neutron groups: 22 or 23 groups including the thermal neutrons (see Table 1.3)
- anisotropy by first order Legendre expansions
- library ENDF/B1, BII and BIV processed by code GGC-3 and GGC-4
- the management of additional sub-routines have been realised by RSYST.

Table 1.3 Relative Fluxes in Each Group

g	Upper boundary	Mean value	Δu (Lethargy)	Centre	Core boundary
1	15 MeV	12.2 MeV	0.4	10^{-5} (.0002)	10^{-6}
2	10	8.18	0.4	.0010 (.0026)	.0006
3	6.7	5.49	0.4	.0045 (.0116)	.0029
4	4.5	3.57	0.4	.0112 (.0286)	.0072
5	5.0	2.46	0.4	.0222 (.0552)	.0146
6	2.0	1.65	0.4	.0407 (.0901)	.0285
7	1.35	1.23	0.2	.0264 (.0536)	.0193
8	1.11	1.00	0.2	.0281 (.0536)	.0215
9	0.91	0.78	0.3	.0475 (.0837)	.0379
10	0.67	0.55	0.4	.0924 (.1373)	.0787
11	0.45	0.37	0.4	.1072 (.1254)	.0972
12	0.30	0.25	0.4	.1152 (.1042)	.1136
13	0.20	0.165	0.4	.1044 (.0749)	.1064
14	0.135	0.108	0.45	.1046 (.0662)	.1108
15	86.5 keV	59.5 keV	0.75	.1061 (.0549)	.1203
16	40.8	25.0	1.00	.1043 (.0394)	.1262
17	15.0	8.0	1.25	.0581 (.0145)	.0768
18	4.31	2.94	0.75	.0047 (.0011)	.0066
19	2.03	1.39	0.75	.0148 (.0025)	.0208
20	0.96	0.67	0.75	.0048 (.0004)	.0079
21	0.45	0.24	1.25	.0008 (10^{-4})	.0017
22	0.13 keV	0.4 eV	5.75	$< 10^{-4}$ $< (10^{-4})$	$< 10^{-4}$
Total	0.4 eV -	15 MeV	$\Sigma = 17.40$	1.0000	1.0000

2.1 BREEDER REACTOR WITH PLUTONIUM BURNING IN SITU

2.1.1 Aim of this Concept


The aim here is to demonstrate the possibility of using a molten chlorides fast breeder reactor with external cooling as a device for consuming all plutonium produced, *in situ*. At first the reactor is fuelled with denatured uranium -233/uranium -238 and this is changed stepwise to a feed of thorium and depleted or natural uranium only.

Such a reactor will have the following phases in its fuel cycle (Table 2.1) See Fig. 2.1

Table 2.1

Phase	Fuel input		Fissile burned <i>in situ</i>	Fuel output	
	Fertile	Fissile		Fissile	Fertile
Start. Build-up phase. (Fig. 2.1 A)	U-238: 70% Th	U-233: 30%	U-233	none	none
Transient Phase (Fig. 2.1 B)	U-238: 70% Th	U-233: 30%	Pu-239 U-233	none	none
Steady State	U-238 Th	none	Pu-239 + other Pu-isotopes	mixed U-233: 3%	U-238

Fig. 2.1 Two-zones Reactors with uranium-233/plutonium-239

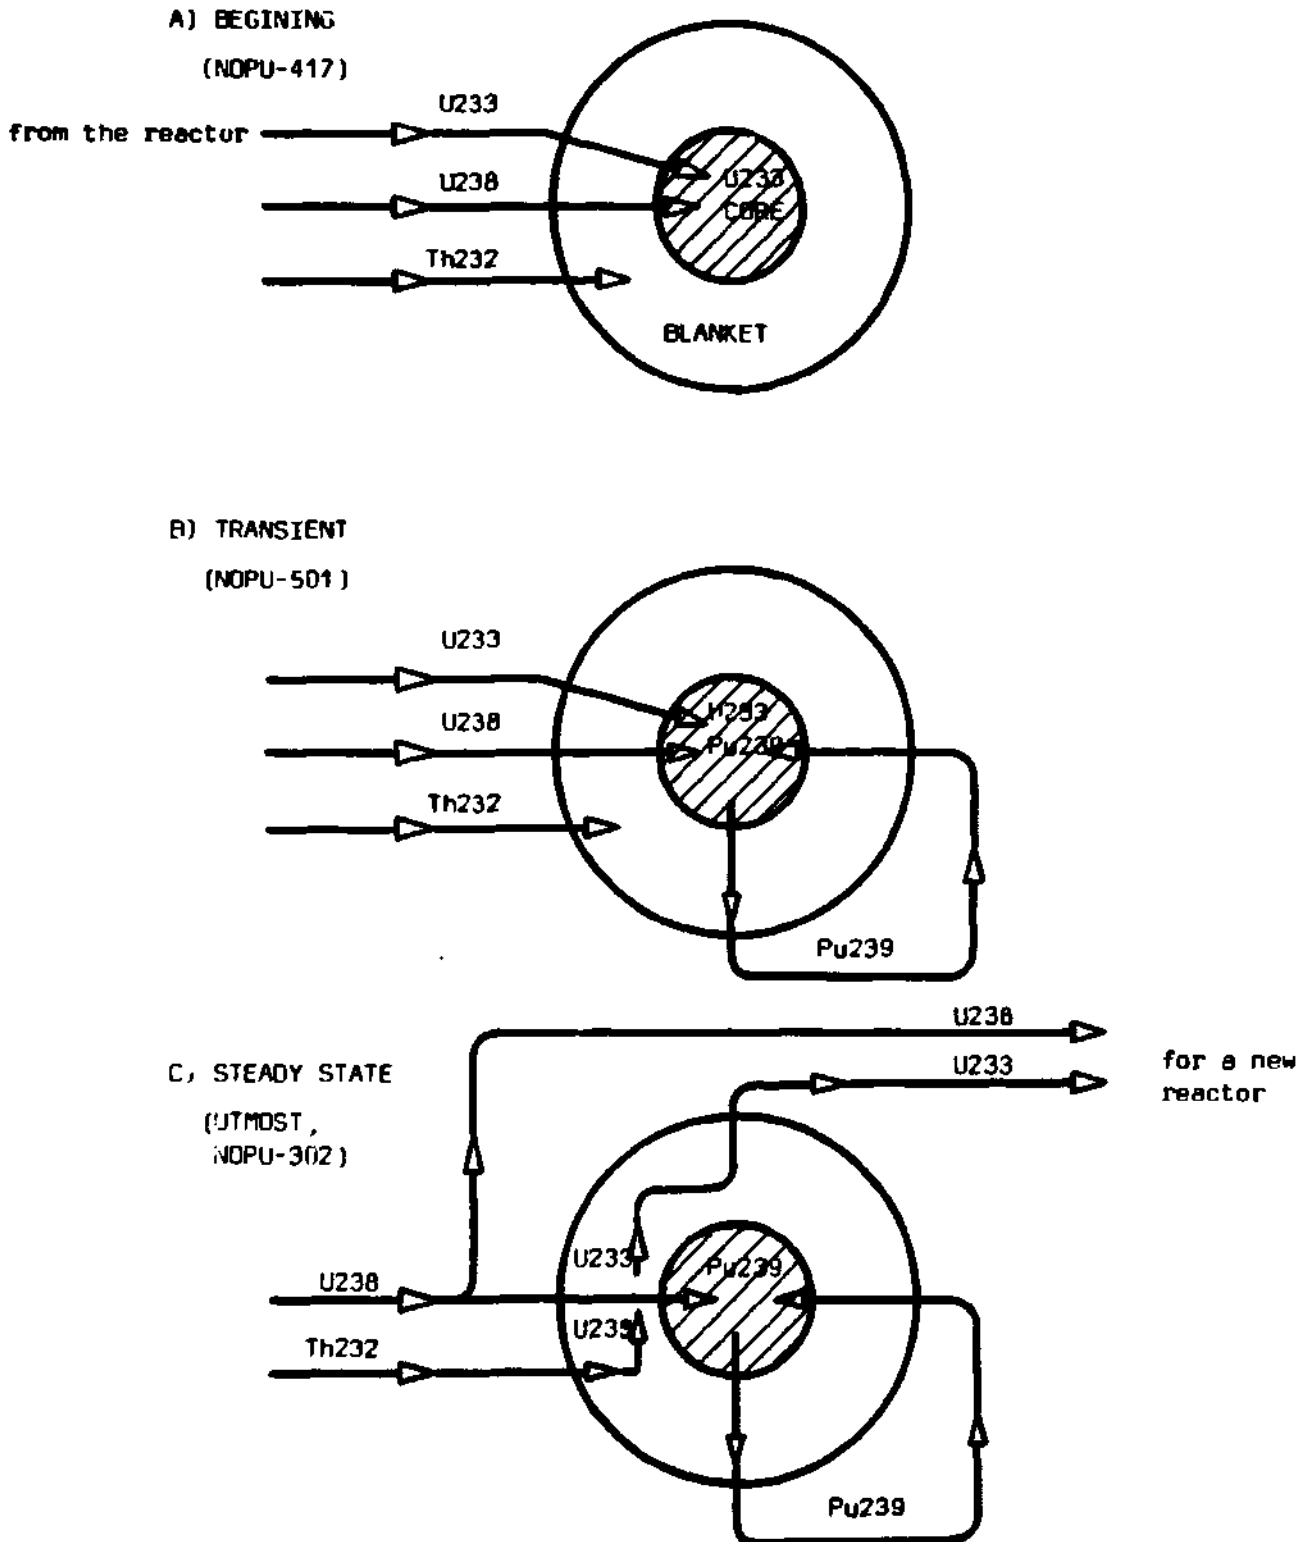

2.1.2 Reactor in the Build-up phase

At the start of the cycle the reactor core is fuelled by uranium-233 denatured with uranium 238 (see Fig. 2.1). (Table 2.2)

Table 2.3 gives information concerning

- the method of calculation
- densities of elements in each of the 5 zones (core, wall, blanket, wall, reflector)

Table 2.4 shows the neutron balance in the core and blanket

Table 2.5 gives the breeding ratio calculated by a microscopic method of the form:

$$BR_{\text{micr}} = \left(\frac{\nu-1+\beta}{1+\alpha} \right) + \left(\frac{(\nu-1)\delta}{1+\alpha} \right) - \frac{L_{\text{tot}} + \alpha}{1+\alpha}$$

- and the macroscopic method by

$$BR_{\text{macr}} = \frac{\text{production rate of fissile nuclide}}{\text{rate of destruction of fissile nuclide}}$$

- and the maximum neutron flux which gives information on the flux spectrum in the core.

Table 2.6 shows the geometry of this reactor e.g. see Fig. 2.2

- radius: 0.955 m
- volume: 3.65 m³

and

- specific power: 0.75 GW(therm)/m³ of core
- total power: 2.8 GW(therm)

and inventories of fissile and fertile materials.

Table 2.7 gives some information concerning

- the material flux in this type of reactor. (for more see section 2.3).

TABLE 2.2

OBJECT :	Thorium-uranium Breeder with Plutonium burning in situ	
REACTOR TYPE	:	Power, Breeder
GEOMETRY : INTERNAL ZONE	:	Fuel
WALL	:	
INTERMEDIATE ZONE	:	
WALL	:	
EXTERNAL ZONE	:	Fertile zone
WALL, REFLECTOR	:	
POWER (GW thermal)	:	0.9
POWER DENSITY (GW therm/m ³ core)	:	0.75
NEUTRON FLUX, MEAN (n/cm ² s)	:	1.5×10^{15}
FISSILE NUCLIDE :	Pu-239/Pu-241 in core, fuel	
	:	U233 in fertile
FERTILE NUCLIDE :	U235 in core, Th232 in fertile	
DILUTENT	:	Chloride
COOLING SYSTEM	:	Outer
BREEDING RATIO	:	1.58
PARAMETER STUDIED :	Make up reactor with U235/U239	
	:	transient reactor with U235 + Pu239
	:	steady state reactor with Pu239
	:	
METHOD OF NEUTRONIC CALCULATION	:	See table 1.10

Fig. 2.1. Schematic diagram of a 7.5 cm diameter

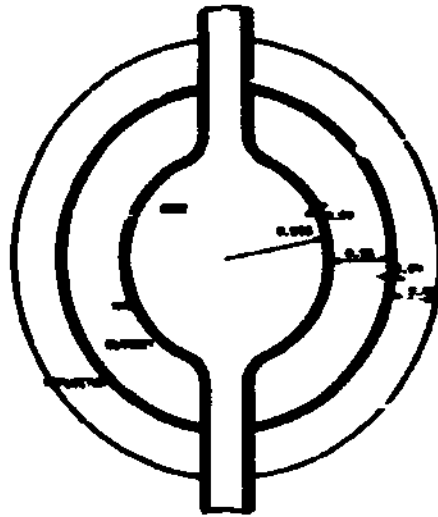


Table 2.3

UTMOST-17,NO2U.

TITLE : SPHERIC GEOM.
DATE : 08/09/77

INPUT DATA (RSYST FORMALISM)

ORDER OF SCATTERING	1
QUADRATURE ORDER	4
NO. OF ZONES	5
NO. OF INTERVALS	40
NO. OF GROUPS	22
EIGENVALUE MODIFIER	-2.000E-01
PRECISION DESIRED	1.000E-03
NORM. FACTOR	2.231E+20
NEW PARM. MOD. SRCH.	1.000E+00

DENSITIES (ATOMS*1E-24/CM3)

CORE

NA	= 7.64E-03	CL	= 1.30E-02	U238	= 4.75E-03
U233	= 5.66E-04	PU239	= 7.31E-07	PU240	= 7.31E-07
PU241	= 7.31E-07	FP239	= 1.61E-07		

RATIO U3/(PUTOT + U3) = 0.37

FIRST WALL

C = 6.62E-02 FE = 2.89E-02

BLANKET

NA	= 5.41E-03	CL	= 1.09E-02	TH232	= 5.41E-03
PA	= 1.30E-05	U233	= 1.09E-05		

2-ND WALL

C = 1.37E-02 FE = 7.31E-02

REFLECTOR

C = .0 FE = 0.46E-02

Table 2.4

UTMOST-417,NOPO.

TITLE : SPHERIC GEOM.

DATE : 08/09/77

```

*****
*
*
*          NEUTRONICS MACR
*          *****
*
* ELEMENT          ABSORPTION          PRODUCTION
*  ~~~~~          ~~~~~
*
* CORE
*  ~~~~
*
* U233          69.992E+15          31.77 16.499E+19          71.95
* U238          65.894E+15          29.91 59.530E+18          25.96
* PU239          73.674E+15          .03 18.217E+16          .08
* PU240          32.018E+15          .01 57.314E+15          .03
* PU241          87.495E+15          .04 22.947E+16          .15
* CL          11.638E+15          5.28 .0          .00
* FE          21.973E+17          1.80 .0          .03
* NA          18.552E+17          .48 .0          .06
* C          13.334E+16          .06 .0          .03
* FP          12.735E+14          .00 .0          .00
*
* TOTAL CORE 15.110E+19          63.60 22.499E+19          98.11
*
* BLANKET
*  ~~~~~
*
* T4232          58.643E+15          22.99 17.989E+17          .78
* U233          11.181E+17          .51 25.407E+17          1.11
* PA          69.619E+15          .32 .0          .06
* CL          62.067E+17          2.82 .0          .06
* FE          18.236E+18          4.65 .0          .06
* NA          27.541E+16          .13 .0          .06
* C          72.251E+13          .00 .0          .00
*
* TOT. BLAN. 69.177E+18          31.43 43.296E+17          1.49
*
* ENTWO *
* LEAKAGE          13.285E+18          5.69          42.168E+17          1.41
*
* T O T A L 22.028E+19          100.00 22.921E+19          100.00
*****

```

THE REACTION (n,2n)

Table 2.5

UTMOST-417,NO>U.

TITLE : SPHERIC GEOM.
DATE : 08/09/77

```

*****
*
*
*          NEUTRONICS MICR
*          *****
*
*          ENTITY          SYMBOL          VALUE
*          ~~~~~          ~~~~~          ~~~~~
*
*          NI0             3.183
*          NI1             3.023
*          NI2             2.455
*          NI3             2.556
*          NI8             2.945
*          NI9             2.996
*          ALFM            .085
*          FASB            .319
*          ABPAR           .173
*          LEAG            .058
*          PRODUCTION     1.357
*          FAST BONUS     .572
*          ABSOR.PARS     .159
*          LEAKAGE        .137
*          BRED.RATIO MICR 1.633
*          PU39 PRODUC     4.568
*          PU39 DESTRO     .007
*          U33 PRODUC     4.791
*          U33 DESTRO     7.111
*          BALANCE U233    BAL433    -2.126
*          BALANCE PU239   BAL439     4.561
*          TOTAL BREEDING MACR  BRTOT     1.342
*
*
*          MAX. FLUX IS : 2.42E+15 FOR GROUP 11 IN INTERVAL 1
*
*
*****
*COMMENT
*FASB, N*SIGMA FISS.F.RT / N*SIGMA FISS.FISSIONABLE.
*ABPAR, N*SIGMA PARAS / N*CAPT.(FERT + FISS).
*LEAG, LEAKAGE / TOTAL ABSOR.(FROM TABLE NEUTRONICS).
*PRODUC, (ZNIM - 1 - ALFM) / (1 + ALF).
*FAST BONUS, (FASB * (NI8 - 1)) / (1 + ALF).
*ABSOR.PARS, ABPAR / (1 + ALF).
*LEAKAGE, LEAG*ZNIM / (1 + ALF).
*BRTOT, N*SIGMA TRANSMUTATION (TH + U8 + PU0) / N*SIGMA.
*CAPT. (U3 + PU9 + PU1),
*****

```

Table 2.6

UTMOST-417,NO²U.

TITLE : SPHERIC GEOM.
DATE : 09/09/77

```

*****
*
*
*      ENTITY          SYMBOL      UNIT          VALUE
*      ~~~~~          ~~~~~          ~~~~~          ~~~~~
*
*      GEOMETRY
*
*      CORE RADIUS      R(1)          M              .955
*      WALL 1 THICKNESS THICK(2)       M              .040
*      BLANKET THICKNESS THICK(3)       M              .550
*      WALL 2 THICKNESS THICK(4)       M              .040
*      HEIGHT OF CYLINDER HEIGHT          M              .000
*      HEIGHT/DIAM. RATIO HDRAT          -              .000
*      VOLUME OF CORE   VOLCOR         M**3           3.650
*      VOLUME OF BLANKET VOLBL          M**3           11.328
*
*      POWER
*
*      POWER IN CORE    POINC          GW              2.730
*      POWER IN BLANKET POINB          GW              .057
*      TOTAL POWER      POWTO          GW              2.790
*      POWER DENHS. CORE  PODEC         GW/M**3         .750
*      POWER DENHS. BLANKET POJEU         GW/M**3         .000
*      POWER RATING OF PU POWRAT         MW/KG           857.330
*
*      INVENTORY
*
*      TOTAL PU239 INVENT. P9TOT*        KG              1.060
*      TOTAL PU INVENT.   PUTOT          KG              3.195
*      U233 IN CORE       U3C           KG              800.212
*      U233 IN BLANKET    U3B           KG              47.450
*      TOTAL U233 INVENT. U8TOT          KG              6064.340
*      TOTAL TH INVENT.   THTOT          KG              23613.092
*      RATIO U33/(PU+U33) RATU8          -              2148.011
*
*      OTHER DATA
*
*      BURN. RATIO (PU/U) JURNR          -              .002
*      DOUBLING TIME      JTIME         YEARS           .010
*      MEAN FLUX CORE     FLMEAN        NEUT/S*CM2     1.200E+10
*
*****

```


The data given indicates that in the given geometry the nominal power and all related values: temperature, temperature gradient, velocity of circulating fuel, heat exchange etc. are as for the steady state reactor with only plutonium fuel in the core (see section 2.1.4).

2.1.3 The Transient Reactor

Very shortly after the start up of the reactor, a significant amount of plutonium has been produced in the core.

The total amount of plutonium chloride, after having been separated from the fission products but mixed with the uranium chloride and sodium chloride is circulated back into the core. The amount of fresh U-233 required is correspondingly smaller.

The reactor now burns two fissile nuclides, the uranium-233 and the reprocessed plutonium. The data given below refers to the case where approximately half of the fissile uranium-233 is replaced by plutonium-239 and plutonium-241.

Based on rather simplified assumptions concerning the isotopic composition of the plutonium it can be shown that the same core design is capable of burning the mixture of fissile materials maintaining approximately the same power level.

Tables 2.8, 2.9, 2.10, 2.11 and 2.12 give the equivalent values previously shown for the build-up phase.

These confirm the suitability of the core design for both the build-up phase and the transient phase.

2.1.4 The steady state reactor

This reactor phase is in fact the main object of the work covered in this report, the steady state fast breeder reactor having the following features.

Table 2.8

UTMOST-501, PU-U.

TITLE : SPHERIC GEOM.
DATE : 10/19/77

INPUT DATA (RSYST FORMALISM)

ORDER OF SCATTERING	1
QUADRATURE ORDER	4
NO. OF ZONES	5
NO. OF INTERVALS	40
NO. OF GROUPS	22
EIGENVALUE MODIFIER	-2.000E+01
PRECISION DESIRED	1.000E+03
NORM. FACTOR	2.435E+20
NEW PARM. MOD. SRCH.	1.000E+00

DENSITIES (ATOMS*1E-24/CM³)

CORE

HA	= 7.59E-03	CL	= 1.30E-02	U238	= 4.72E-03
U233	= 2.83E-04	PU239	= 2.54E-04	PU240	= 7.26E-05
PU241	= 3.63E-05	FP239	= 5.59E-05		

RATIO U8/(PU10T + U3) = 7.30

FIRST WALL

C = 6.62E-02 FE = 7.80E-02

BLANKET

HA	= 5.41E-03	CL	= 1.08E-02	TH232	= 5.41E-03
PA	= 1.30E-05	U233	= 1.00E-05		

2ND WALL

C = 1.37E-02 FE = 7.31E-02

REFLECTOR

C = .0 FE = 8.46E-02

Table 2.9

UTPOST-501, PU+U.

.....

TITLE : SPHERIC NEON.

DATE : 10/29/77

NEUTRONICS MAP				
.....				
ELEMENT	ABSORPTION		PRODUCTION	
CORE				
U233	38.077E+18	16.27	89.679E+18	36.80
U238	71.188E+18	30.42	62.698E+18	25.73
PU239	27.072E+18	11.82	48.323E+18	28.04
PU240	33.093E+17	1.45	61.259E+17	2.51
PU241	47.059E+17	2.52	12.348E+18	5.07
CL	12.050E+18	5.28	.0	.00
FE	23.098E+17	1.01	.0	.00
NA	11.275E+17	.48	.0	.00
C	13.098E+16	.06	.0	.00
FF	46.166E+16	.21	.0	.00
TOTAL CORE	16.153E+19	69.61	23.917E+19	98.15
BLANKET				
TH232	58.078E+18	22.81	18.379E+17	.75
U233	11.761E+17	.58	26.719E+17	1.10
PA	73.403E+16	.31	.0	.00
CL	69.000E+17	2.78	.0	.00
FE	10.450E+18	4.46	.0	.00
NA	20.013E+16	.12	.0	.00
C	74.029E+15	.00	.0	.00
TOT. BLANK.	72.928E+18	36.99	49.098E+17	1.85
BLANKET LEAKAGE	14.126E+18	5.69	44.460E+17	1.80
T O T A L	23.405E+19	106.60	74.364E+19	100.00

Table 2.10

UTMOST-501, PU+U.

TITLE : SPHERIC GEOM.
 DATE : 16/19/77

```

    .....
    *
    *
    *          NEUTRONICS MACR
    *          .....
    *          EMLLY          SYMBOL          VALUE
    *
    *   NIC                      3.182
    *   NI1                      3.022
    *   NI2                      2.456
    *   NI3                      2.554
    *   NI4                      2.946
    *   NI0                      2.994
    *   ALFM                      .136
    *   FASP                      .380
    *   ANPAR                      .172
    *   LEAG                      .058
    *   PRODUCTION                1.426
    *   FAST PONUS                .651
    *   ABSOR.PARS                .152
    *   LEAKAGE                   .141
    *   BREED.RATIO MACR          1.784
    *   PU39 PRODUC               4.991
    *   PU39 DESTROY              2.767
    *   U33 PRODUC                5.263
    *   U33 DESTROY              3.925
    *   BALANCE U235              BALA33    1.338
    *   BALANCE PU239              BALA39    2.223
    *   TOTAL BREEDING MACR       BNTOT    1.451
    *
    *   MAX. FLUX IS : 2.59E+15 FOR GROUP 11 IN INTERVAL 1
    *
    *
    * .....
    * COMMENT
    * FASP, N*SIGMA FISS,FERT / N*SIGMA FISS,FISSIONABLE.
    * ANPAR, N*SIGMA PARAS / N*CAPT.(FERT + FISS).
    * LEAG, LEAKAGE / TOTAL ABSOR.(FROM TABLE NEUTRONICS).
    * PRODUC, (ZNIM - 1 - ALFM) / (1 + ALF).
    * FAST PONUS, (FASP + (NI4 - 1)) / (1 + ALF).
    * ABSOR.PARS, ANPAR / (1 + ALF).
    * LEAKAGE, LEAG*ZNIM / (1 + ALF).
    * BNTOT, N*SIGMA TRANSUTATION (TH + U3 + PU0) / N*SIGMA.
    * CAPT. (U3 + PU0 + PU1).
    * .....
    
```

Table 2.11

UTMOST-901, PU+U.

TITLE : SPHERIC GEOM.
 DATE : 16/09/77

ENTITY	SYMBOL	UNIT	VALUE
GEOMETRY			
CORE RADIUS	R(1)	M	.963
WALL 1 THICKNESS	THICK(2)	M	.040
BLANKET THICKNESS	THICK(3)	M	.550
WALL 2 THICKNESS	THICK(4)	M	.040
HEIGHT OF CYLINDER	HEIGHT	M	.000
HEIGHT/DIAM. RATIO	HDRAT	-	.000
VOLUME OF CORE	VOLCOR	M**3	3.740
VOLUME OF BLANKET	VOLRL	M**3	11.461
POWER			
POWER IN CORE	POINC	GW	2.749
POWER IN BLANKET	POINB	GW	.059
TOTAL POWER	POWTO	GW	2.808
POWER DENS. CORE	PODEC	GW/M**3	.735
POWER DENS. BLANKET	PODEB	GW/M**3	.005
POWER RATING OF PU	POWRAT	MW/KG	5.091
INVENTORY			
TOTAL U239 INVENT.	P9TOT	KG	377.326
TOTAL PU INVENT.	P1TOT	KG	539.940
U233 IN CORE	U3C	KG	409.894
U233 IN BLANKET	U3B	KG	47.984
TOTAL U233 INVENT.	U3TOT	KG	6978.166
TOTAL HM INVENT.	H1TOT	KG	23869.212
RATIO U3B/(PU+U33)	PATUB	-	12.924
OTHER DATA			
PURN. RATIO (PU/U)	PURNR	-	.026
DOUBLING TIME	DTIME	YEARS	1.291
MEAN FLUX CORE	FLMEAN	NEUT/S*CM2	1.334E+16

Table 2.12

```

.....
*
*                               TABLE                               *
*                               *.....*                             *
*          MATERIAL BALANCE OF THE BREEDER SYSTEM                    *
*          INCLUDING NEW REACTOR                                       *
*.....
*   *   THOR   *   PA   *   U233   *   U238   *   PU30   *
*.....
*ORS  1.92E+04  6.39E+02  6.30E+02  1.83E+03  6.22E+02*
*SBL  2.39E+04  5.76E+01  4.80E+01
*FBL  9.99E+00  8.95E+00  4.41E+02
*FTR  6.39E+02  6.30E+02
*SCC  4.10E+02  6.98E+03  3.77E+02*
*FFP  2.65E+02  3.46E+02*
*FCB  6.49E+02  8.87E+02
*FLR  2.39E+00  5.76E-03  4.80E+03  6.98E+00  3.77E-01*
*SRE  2.39E+00  5.76E-03  4.10E+01  6.98E+00  3.77E-01*
*FNA  6.49E+01  1.80E-01  6.98E-04  3.77E-02*
*FNW  1.80E+04  1.80E+02  9.44E+02
*SNW  2.39E+04  2.44E+02  1.22E+03
*.....

```

WHERE

- ORS = FLOW FROM THE ORE OR SYNTH. IN KG / YEAR
- SBL = STEADY STATE IN THE BLANKET IN KG,
- FBL = FLOW FISSION + PARAS. IN BLANKET IN KG / YEAR
- FTR = FLOW FOR TRANSMUTATION IN KG / YEAR
- SCC = STEADY STATE IN THE CORE IN K
- FFP = FLOW FISSION + PARASITIC IN CORE IN KG / YEAR
- FCB = FLOW TO THE CORE OR BLANKET IN KG / YEAR
- FLR = FLOW TO REPROCESS AND RETURN IN KG / YEAR
- SRE = STEADY STATE IN THE RE-PROCESSING IN KG
- FNA = FLOW TO THE WASTE IN KG / YEAR
- FNW = FLOW TO THE NEW IN KG / YEAR
- SNW = IN THE NEW AFTER DTIME IN KG

- all the freshly bred plutonium can be burned in the same reactor (the history of the transplutonium elements is neglected here).
- to achieve this *in situ* burning of plutonium the reprocessing of the irradiated fuel is limited to the separation of all or just the most neutron absorbing fission products and directly coupled to the reactor
- for the next generation of reactors the fuel is produced in the form of denatured uranium, that is an isotopic mixture of

10.5% uranium -233 (produced in this breeder)

89.5% uranium -238 (from the mine or depleted uranium stock-piles)

- for over 90% of the lifetime of this plant, that is ~30 years, the reactor burns its own plutonium and produces the uranium -233 for the next breeder generation. Tables 2.13 to 2.17 give the corresponding data for this reactor phase as before.

2.1.5 Comparison of the three phases

In spite of this rather over-simplification it seems that the proposed reactor design is suited for burning:

uranium -233 in the first phase

uranium -233 and plutonium in the second phase

plutonium in the steady state phase.

(see Fig. 2.3)

As a first approximation the timetable of such a reactor will be as follows

- doubling time approximately 4 years (including the out of core inventory),
- transient period (going from U-233 to plutonium) approximately 2 years,
- steady state period approx 30 years including shutdown periods for the exchange of the core vessel etc. See Table 2.18

Table 2.12

UT:OST-302,NOP11.

TITLE : SPHERIC GEOM.
DATE : 03/09/77

INPUT DATA (PSYST =ORMALISM)

ORDER OF SCATTERING	3
QUADRATURE ORDER	3
NO. OF ZONES	5
NO. OF INTERVALS	41
NO. OF GROUPS	22
EIGENVALUE MODIFIER	-2.000E+01
PRECISION DESIRED	1.000E+03
NORM. FACTOR	2.500E+20
NEW PARM. MOD. SRCH.	1.000E+00

DENSITIES (ATOMS * E-24/CM3)

COBE

HA	= 7.40E-03	CL	= 1.29E-02	U238	= 4.71E-03
U233	= 7.36E-07	PU239	= 5.13E-04	PU240	= 1.43E-04
PU241	= 8.17E-05	FP239	= 1.12E-04		

RATIO U8/(PUTOT + U3) = 6.39

FIRST WALL

C = 6.62E-02 FE = 2.88E-02

BLANKET

HA	= 5.41E-03	CL	= 1.08E-02	TH232	= 5.41E-03
FA	= 1.30E-05	U233	= 1.08E-05		

2-ND WALL

C = 1.37E-02 FE = 7.31E-02

REFLECTOR

C = .0 FE = 8.46E-02

Table 2.14

UT:OST-302,NOPU.

TITLE : SPHERIC GEOM.
 DATE : 03/09/77

```

    .....
    *
    *                               NEUTRONICS FACT
    *                               .....
    *
    * ELEMENT          ABSORPTION          PRODUCTION
    *
    * CORE
    *
    * U233          10.999E+10          .84  24.936E+10          .18
    * U238          76.015E+10          38.64  69.729E+10          25.45
    * PU239          90.041E+10          23.65  4.513E+19          96.19
    * PU240          69.111E+17          2.79  27.726E+10          4.93
    * PU241          11.488E+10          4.59  20.052E+10          11.48
    * CL            14.003E+10          5.27   .0
    * FE            25.411E+17          1.52   .0
    * NA            11.033E+17          .48   .0
    * C             14.239E+10          .56   .0
    * FP            10.487E+17          .42   .0
    *
    * TOTAL CORE  17.187E+19          68.96  24.340E+19          98.14
    *
    * BLANKET
    *
    * Tl-232          97.083E+10          23.11  10.365E+17          .75
    * U233           12.088E+17          .51  20.736E+17          1.11
    * PA             75.191E+10          .38   .0
    * CL            66.744E+17          2.69   .0
    * FE            18.716E+10          4.46   .0
    * NA            36.448E+10          .12   .0
    * C             77.057E+13          .66   .0
    *
    * TGT. BLANK.  76.992E+10          31.04  40.236E+17          1.06
    *
    * CR-TWO
    * LEAKAGE       14.056E+10          5.05   .0
    *
    * T O T A L  24.026E+19          100.00  24.388E+19          100.00
    *
    .....
    
```

Table 2.15

UTMOST-362,NOPU.

TITLE : SPHERIC GEOM.
DATE : 03/09/77

```

*****
*
*          NEUTRONICS MICR
*          *****
*          SYMBOL          VALUE
*
*  N10          3.182
*  N11          3.020
*  N12          2.454
*  N13          2.515
*  N18          2.947
*  N19          2.993
*  ALFM          .260
*  FASB          .455
*  ABPAR          .173
*  LEAG          .858
*  PRODUCTION    1.501
*  FAST BONUS    .758
*  ADSOR.PARS    .144
*  LEAKAGE        .144
*  REED.RATIO MICR  1.951
*  PU39 PRODUC    5.371
*  PU39 DESTRO    5.866
*  U33 PRODUC     5.630
*  U33 DESTRO     .137
*  BALANCE U233    BALA33    5.492
*  BALANCE PU239    HALA39    .495
*  TOTAL BREEDING MACR  BRTOT    1.581
*
*  MAX. FLUX IS : 2.81E+15 FOR GROUP 11 IN INTERVAL 1
*
*****
* COMMENT
* FASB, N*SIGMA FISS.FERT / N*SIGMA FISS.FISSIONABLE.
* ABPAR, N*SIGMA APAS / N*CAPT.(FERT + FISS).
* LEAG, LEAKAGE / TOTAL ADSOR.(FROM TABLE NEUTRONICS).
* PRODUC, (ZNIM = 1 + ALFM) / (1 + ALF).
* FAST BONUS, (FASB + (N18 = 1)) / (1 + ALF).
* ADSOR.PARS, ABPAR / (1 + ALF).
* LEAKAGE, LEAG*ZNIM / (1 + ALF).
* BRTOT, N*SIGMA TRANSMUTATION (TH + U3 + PU0) / N*SIGMA.
* CAPT. (U3 + PU9 + PU1).
*****

```


Table 2.17

TABLE					
MATERIAL BALANCE OF THE BREEDER SYSTEM INCLUDING NEW REACTOR					
	THOR	PA	U233	U238	PU39
*ONS	1.26E+04	6.83E+02	6.74E+02	4.24E+03	6.79E+02
*SBL	2.36E+04	5.68E+01	4.73E+01		
*FBL	9.55E+00	9.17E+00	1.51E+01		
*FTR	6.83E+02	6.74E+02		6.69E+02	
*SCO			1.03E+00	6.76E+03	7.37E+02
*FFP				2.78E+02	7.34E+02
*FCB	6.94E+02			9.47E+02	
*FLR	2.36E+00	5.68E-03	4.73E-03	6.76E+00	7.37E-01
*SRE	2.36E+00	5.68E-03	1.03E-03	6.76E+00	7.37E-01
*FWA	6.94E-01		6.58E-01	6.76E-04	7.37E-02
*FNA	1.19E+04		6.55E+02	3.29E+03	
*SNW	2.36E+04		1.31E+01	6.53E+03	

WHERE

- ONS = FLOW FROM THE ORE OR SYNTH. IN KG / YEAR
- SBL = STEADY STATE IN THE BLANKET IN KG.
- FBL = FLOW FISS. + PARAS. IN BLANKET IN KG / YEAR
- FTR = FLOW FOR TRANSMUTATION IN KG / YEAR
- SCO = STEADY STATE IN THE CORE IN KG
- FFP = FLOW FISS. + PARASITIC IN CORE IN KG / YEAR
- FCB = FLOW TO THE CORE OR BLANKET IN KG / YEAR
- FLR = FLOW TO REPROCESS AND RETURN IN KG / YEAR
- SRE = STEADY STATE IN THE RE-PROCESSING IN KG
- FWA = FLOW TO THE WASTE IN KG / YEAR
- FNA = FLOW TO THE NEW IN KG / YEAR
- SNW = IN THE NEW AFTER DTIME IN KG

Fig. 2.3 Plutonium concentration in the core

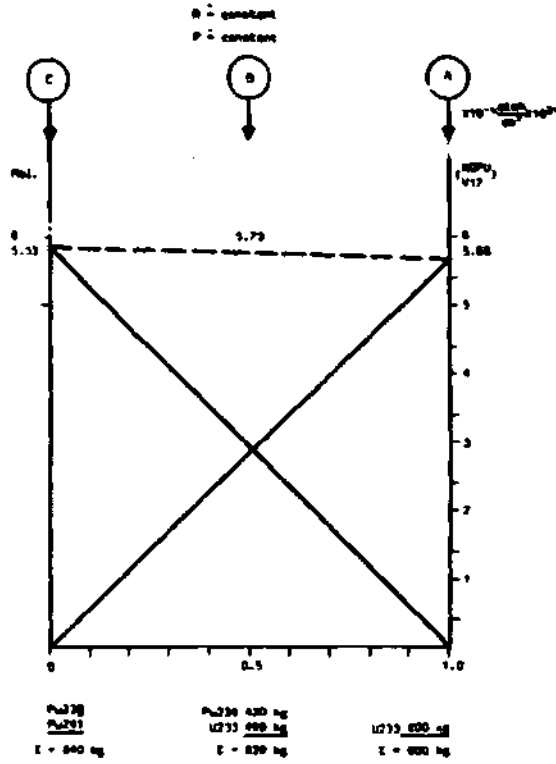


Fig. 2.4 Thorium and uranium-238 breeding (MOX-238)

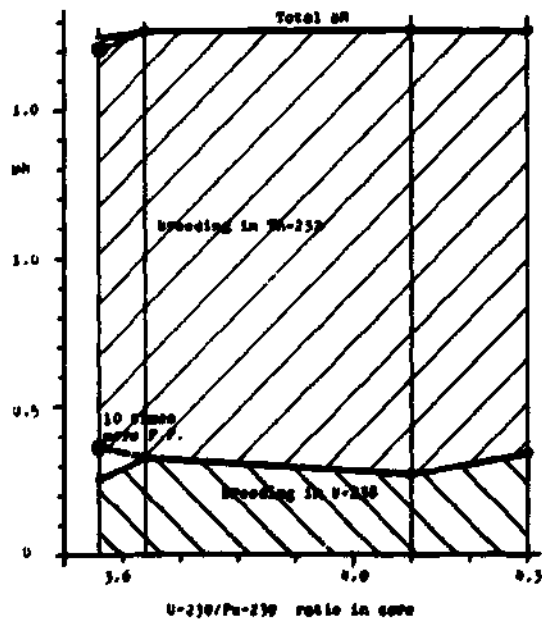


Table 2.18 Core Diameter = 0.95 m
Power = 2.8 GW(th)

		Build-up	Transient	Steady State
		A	B	C
Fissile	-	U233	U233, Pu239 + 241	Pu239 + 241
Core inventory	kg	800	409, 430	840
Fertile	-	U238	U238	U238
Core inventory	kg	6864	6978	6763
$\frac{\text{Fissile}}{\text{Fertile}}$ (enrichment)	%	10.4	10.7	11.0
Breeding ratio total	BR_{tot}	1.34	1.45	1.58
Mean neutron flux	$10^{16} \frac{\text{neutrons}}{\text{cm}^2\text{s}}$	1.26	1.33	1.46
Power density	$\frac{\text{GW(therm)}}{\text{m}^3 \text{ core}}$	0.75	0.745	0.75

It should be emphasised that the era when fusion reactors are replaced by other energy sources and hence the plutonium burners are shut-down, has not been dealt with.

Even here it is conceivable that a reactor design could be proposed which only consumes and thus be used in this shutdown phase. This however has not been calculated.

2.2 Impact of some parameters on the mixed zone two zone fast breeder

In this section some intermediate results are presented concerning the influence of selected parameters in this design, and giving the breeding capability of a two zone fast breeder reactor. (Table 2.19)

The influence of mutual displacement.

$$\Sigma(\text{Pu -239}) + \Sigma(\text{U-233}) = 9 \times 10^{-6} \text{ (} 10^{24} \text{atom. cm}^{-3} \text{)}$$

by five steps from A to E is given in Table 2.20 and Fig. 2.5 and 2.6.

The influence of the thickness of the external blanket, which contains thorium, on the total breeding ratio and the volume of the core for a given case of the following concentrations of fissile nuclides

$$\text{Pu-239 } 3.5 \times 10^{-6} \text{ (} 10^{24} \text{atom. cm}^{-3} \text{)}$$

$$\text{U-233 } 10.0 \times 10^{-6} \text{ (} 10^{24} \text{atom. cm}^{-3} \text{)}$$

is given in Table 2.20.

For the same case the partial BR's and BR total are shown in Fig. 2.7 and Fig. 2.8

In addition the following 4 reactor designs have been calculated having the following arrangement

$$\text{Core Pu-239 } 1.1 \times 10^{-6} \longrightarrow 1.8 \times 10^{-6} \text{ (} \times 10^{24} \text{atom. cm}^{-3} \text{)}$$

$$\text{U-233 } 3.4 \times 10^{-6} \longleftarrow 5.5 \times 10^{-6} \text{ (} \times 10^{24} \text{atom. cm}^{-3} \text{)}$$

$$\text{U-233/Pu-239} = 3.1$$

Blanket thickness 100 cm.

The data are given in Tab. 2.21. Other results are found in Fig. 2.9, 2.10 and 2.11.

Table 2.19

OBJECT: Plutonium burning *in situ*: some parameters.

REACTOR TYPE : Power, Breeder, Two zones
GEOMETRY: INTERNAL ZONE : Spherical core, ~ 65 cm
WALL : ~ 4 cm
INTERMEDIATE ZONE : -
WALL : ~ 4 cm
EXTERNAL ZONE : Blanket: 100 cm
WALL, REFLECTOR : Iron,....

POWER (GW thermal) : 3 GW
POWER DENSITY (GW therm/m³CORE) :
NEUTRON FLUX, MEAN (n/cm²s) : 2

FISSILE NUCLIDE : Core - Pu239
: Out blanket - U-233
FERTILE NUCLIDE : Core - U238 Out, Blanket Th232
DILUTENT : Chlorides
COOLING SYSTEM : External to core
BREEDING RATIO :

PARAMETER STUDIED : Ratio U238/PU239 in core
: Ratio PU239/U233
: FP Concentration
: Wall (Molybdenum) thickness
: Blanket thickness

METHOD OF NEUTRONIC :
CALCULATION : see 1.10 (page 17)

Table 2.20 Mixture of Pu-238 and U-233 in the core

Pu/U3 Ratio	A Pu only	B Pu > U3	C Pu = U3	D Pu < U3	E U3 only
Fission/sec	2.74×10^{20}	2.6×10^{20}	2.51×10^{20}	2.41×10^{20}	2.32×10^{20}
Pu-239, core U-233 } $\times 10^{24}$ at/cm ³	9.10^{-6} 0.0	6.10^{-6} 3.10^{-6}	4.10^{-6} 5.10^{-6}	2.10^{-6} 7.10^{-6}	0.0 0.10^{-6}
BR total	1.761	1.64	1.56	1.49	1.42
Partial BR U/Pu	0.353	0.312	0.289	0.271	0.259
Partial BR Th/U-233	1.408	1.33	1.27	1.21	1.16
Flux tot. (ncm ⁻² s ⁻¹)	2.05×10^{16}	1.99×10^{16}	1.94×10^{16}	1.86×10^{16}	1.76×10^{16}
Radius, (cm)	67.28	66.22	65.72	65.5	65.8
Volume, (cm)	1.28	1.22	1.19	1.18	1.19
Spec. power (GW m ⁻³)	2.34	2.46	2.52	2.54	2.52
Ratio of partial breeding ratios	3.99	4.26	4.39	4.46	4.48
Fission ratios $\frac{U-233}{Pu-239}$	0	0.89	2.28	5.40	∞

Fig. 2.1 Variation and breeding ratio according (MPPU-22)

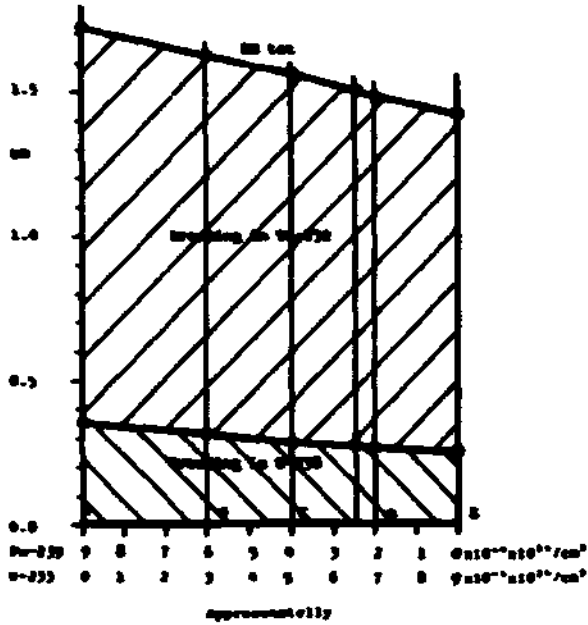


Fig. 2.5 Ratio of breeding ratios (MPPU-22)

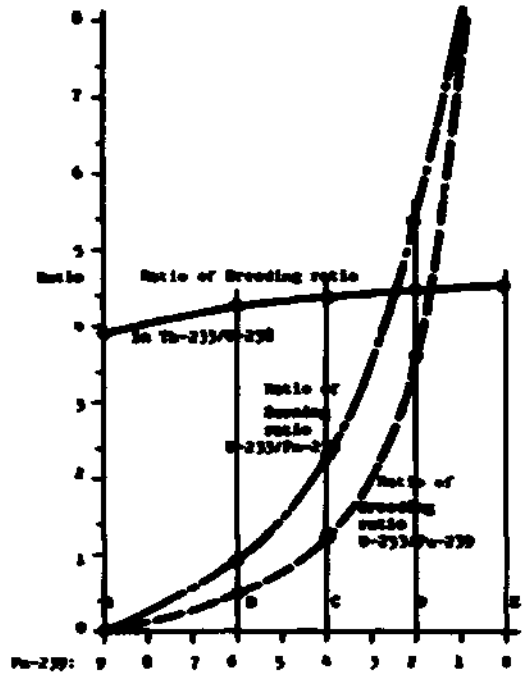


Fig. 2.7 Ratio of core versus ratio of blanket (MPPU-22)

$Pu = 3.5 \times 10^{-2}$
 $U = 20.0 \times 10^{-2}$ $\times 10^{22}$ atom/cm³

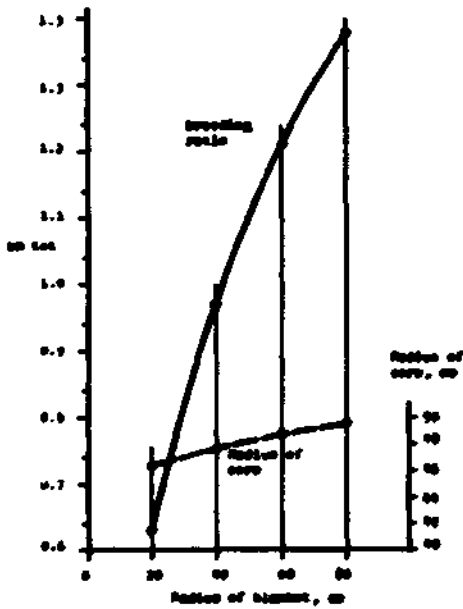


Fig. 2.8 Partial breeding ratio (MPPU-22)

$Pu = 3.5 \times 10^{-2}$
 $U = 20.0 \times 10^{-2}$ $\times 10^{22}$ atom/cm³

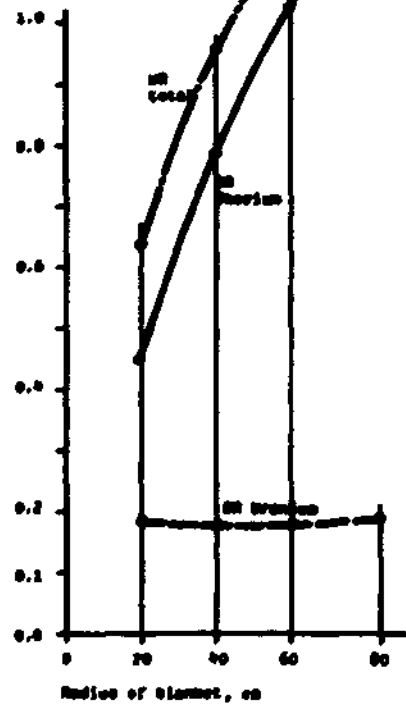


Table 2.21 Influence of Pu/U33 ratio

Parameters	A	B	C	D
U-238	1.0	0.85	0.85	0.85
Pu-239	1.8×10^{-4}	1.5×10^{-4}	1.3×10^{-4}	1.1×10^{-4}
Pu-240 $\times 10^{24}$ atom/cm ³	2.5×10^{-5}	2.1×10^{-5}	1.8×10^{-5}	1.55×10^{-5}
U-233	5.5×10^{-4}	4.7×10^{-4}	4.0×10^{-4}	3.4×10^{-4}
U3/Pu9 ratio	3.06	3.13	3.08	3.09
BR total	1.51	1.51	1.52	1.528
Partial BR thorium	1.12	1.04	0.95	0.852 (see fig.2.9)
Partial BR uranium	0.39	0.47	0.564	0.677
$\frac{Th}{U}$ breeding ratio	2.37	2.21	1.98	1.26 (see fig.2.10)
Flux tot (ncm ⁻² s ⁻¹)	1.3×10^{16}	0.92×10^{16}	0.62×10^{16}	0.463×10^{16}
Radius of core, cm	78.6	91.4	107.7	122.0
Volume of core, m ³	2.03	3.2	5.23	7.61
Spec. power (GW m ⁻³)	1.48	0.938	0.574	0.39
Thickness of blanket m	1.0	1.0	1.0	1.0
Volume of blanket m ³	80.6	93.4	109.7	124.0
Pu-39 in core, atoms	3.65×10^{26}	4.8×10^{26}	6.80×10^{26}	8.37×10^{26}
mol	609	800	1130	1400
kg	146	191	271	333
U.33 in core, atoms	1.12×10^{27}	1.5×10^{27}	2.09×10^{27}	3.59×10^{27}
mol	1860	2510	3490	4310
kg	434	584	812	1000
Th in blanket, atoms	1.01×10^{29}	1.21×10^{29}	1.49×10^{29}	1.85×10^{29}
mol	169000	202000	248000	293000
kg	39200	46800	57600	68000
U-238 in core, atoms	9.54×10^{27}	1.5×10^{28}	2.46×10^{28}	3.58×10^{28}
mol	15900	25100	41000	596000
kg	3780	5970	9750	14200
$\frac{Th-232}{U-238}$ inventory ratio	10.6	8.1	6.0	4.8
Burning rate				
Pu-239 in 10^{17} atom/s	1.44	1.39	1.39	1.36
U-233 in 10^{17} atom/s	6.08	5.11	6.08	6.09
Ratio $\frac{U3}{Pu}$ burning		4.36		

Fig. 2.7 Partial breeding ratio
(MTR-34)

Concentration ratio $\frac{U-233}{Pu-239} = 3.1$

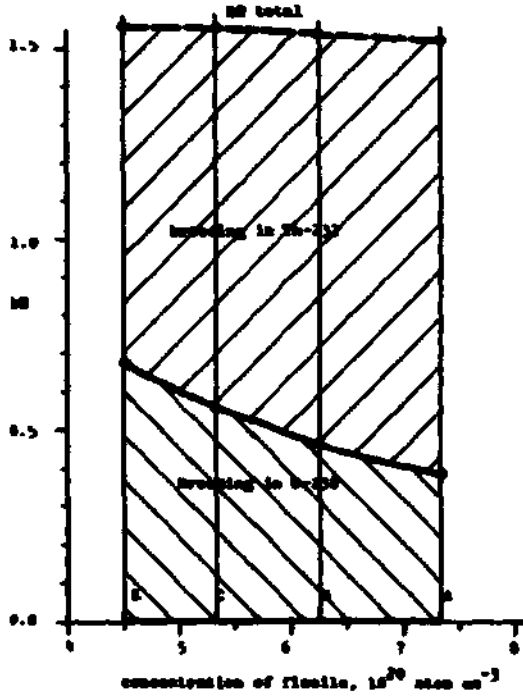


Fig. 2.10 Ratio of burning rate and ratio of breeding rate


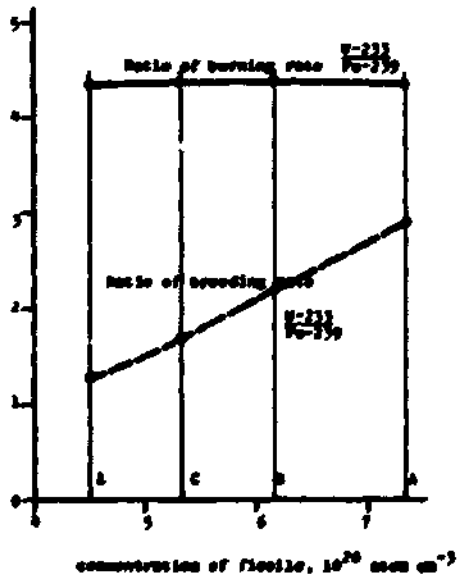


Fig. 2.11 Impact of some selected parameters
(MDFU-26 reference)

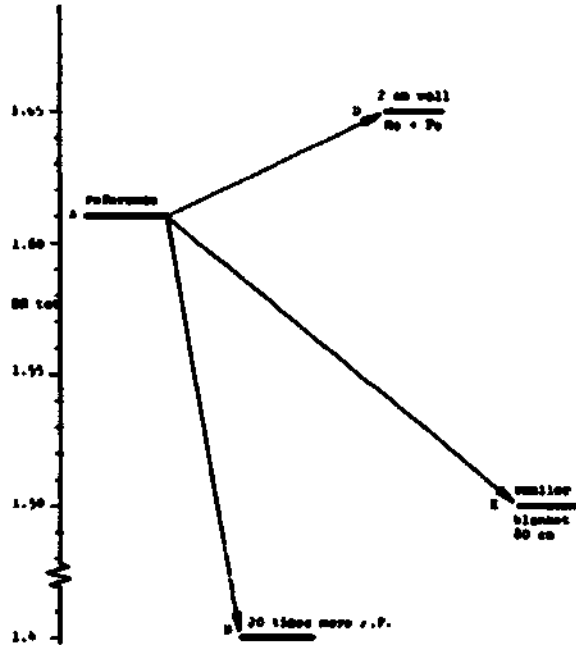


2.3 Material balance of the state reactor

The most important feature of this reactor is the *in situ* consumption of plutonium. The studies show this to be feasible. Fig. 2.12 gives the resulting material balance for the steady state reactor.

2.4 Conclusions

The molten chlorides fast breeder is ideally suited to the *in-situ* burning of plutonium matching the current requirement for a "proliferation safe" concept.

Fig. 2.12

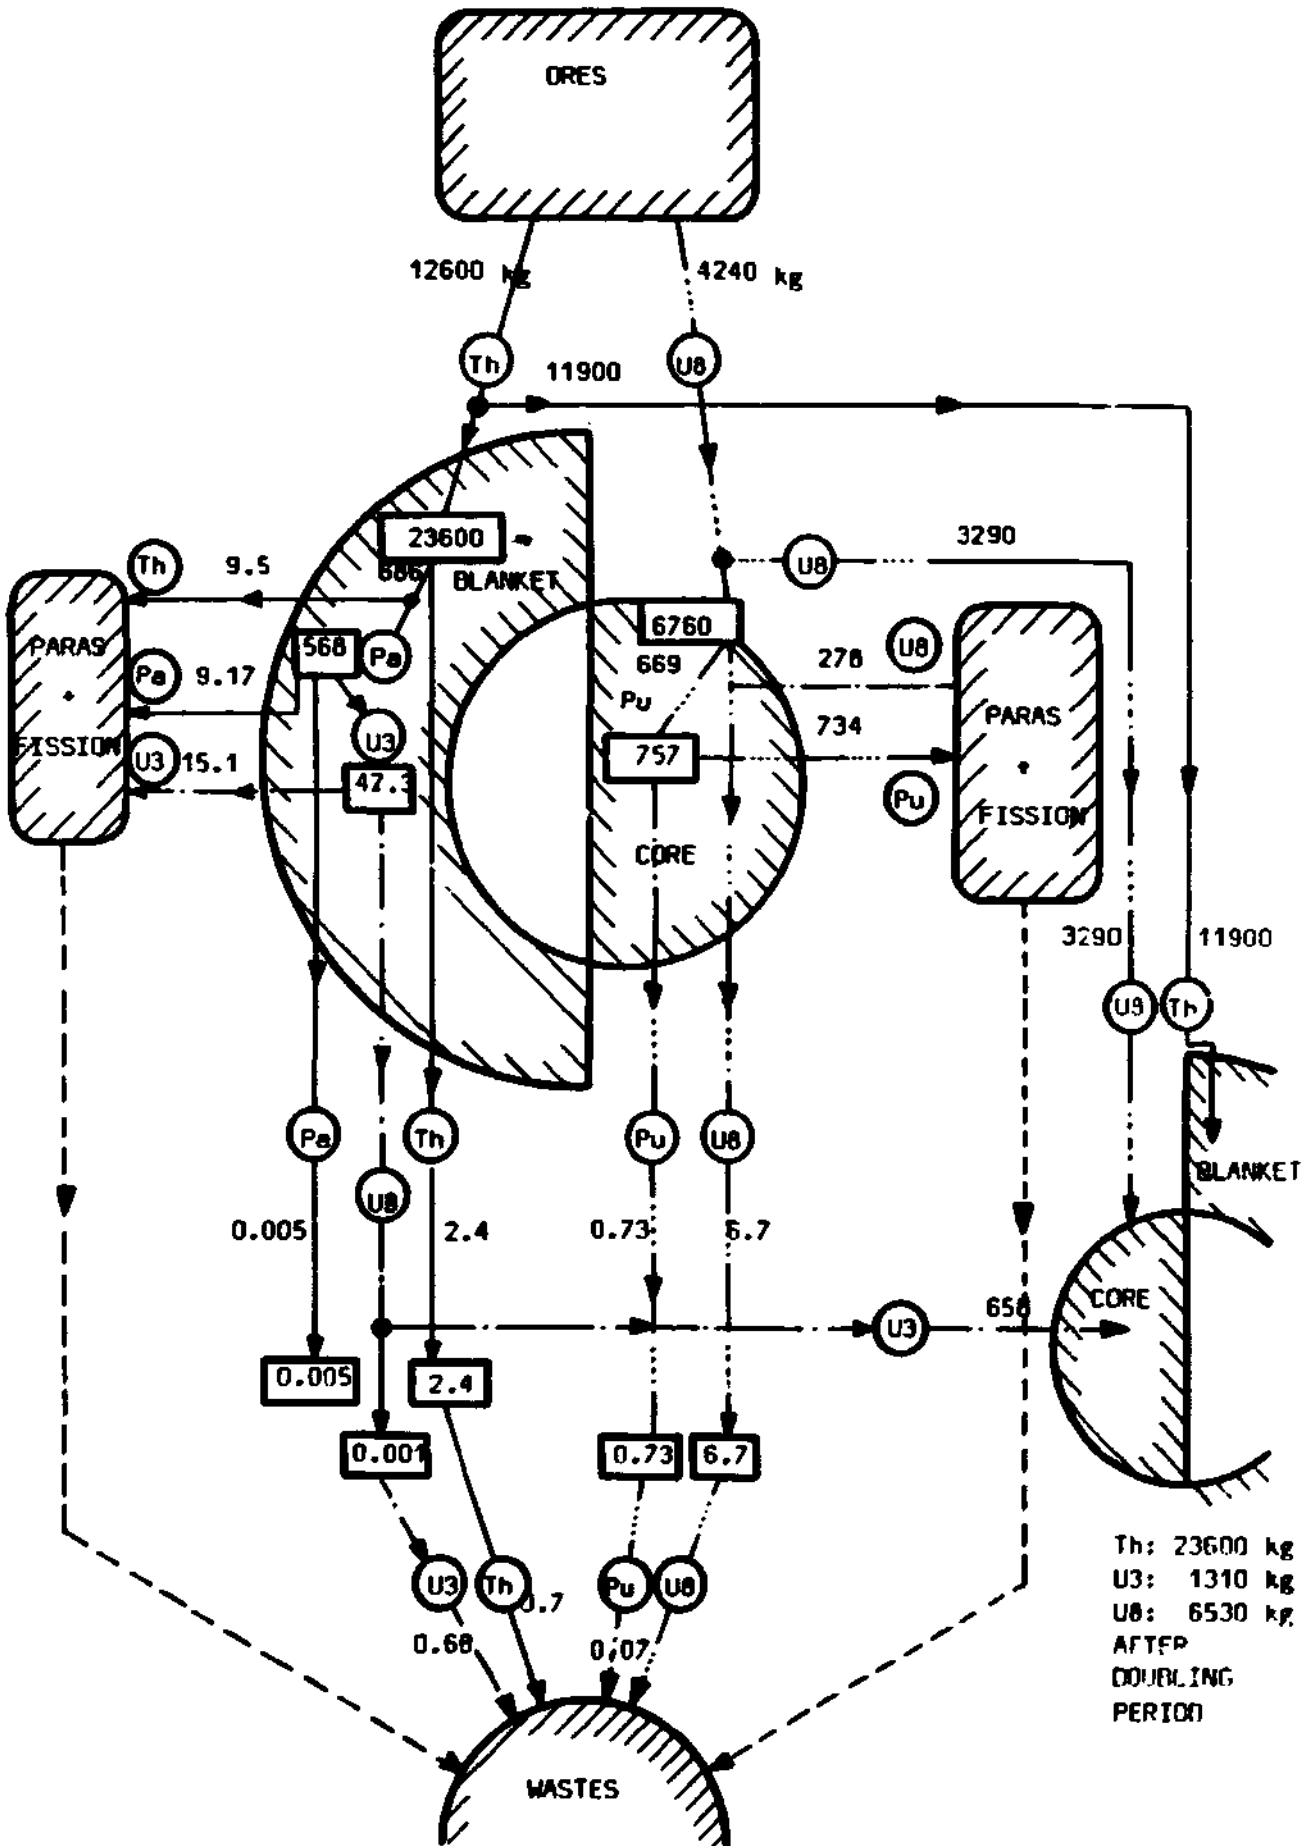

3.1 THE THREE ZONE REACTOR

3.1.1 Introduction

The reactor discussed now is rather unconventional because of its three zones (see Fig. 1.2)

- internal blanket zone
- fuel zone
- external blanket zone

This concept has been compared with the more conventional type. Holding most of the parameters the same the breeding gain comes out about equal. However, one large difference is that although the total power is the same the specific power changes by more than one magnitude being higher in the conventional central fuel zone reactor. Also the mean neutron flux increases from $1.2 \times 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$ for the non-conventional central blanket zone to $2 \times 10^{17} \text{ n cm}^{-2} \text{ s}^{-1}$ for the conventional central fuel zone.

Since the specific power and intensity of neutron flux is clearly a major problem from the point of view of the engineering design of the reactor (cooling, radiation damage of structural material and fuel), both systems have been studied, that is without a central blanket region and with a radius up to 110 cm. The results are given below for fuel without uranium and with uranium fuel for both cases: no internal blanket zone and with an internal blanket zone.

3.1.2 The three zone breeder with thorium/uranium-233

The first case is the fast breeder molten salt reactor with uranium-233 as fissile and thorium-232 as fertile material with a three region layout.

- internal fertile zone	1,	50,	90,	110	cm
- wall	2				cm
- spherical shell core	19				cm
- wall	3				cm
- external fertile zone	110				cm
- r flector	40				cm

Table 3.1 gives the main details of the reactor.

3.2 A Three zone breeder reactor with a mixed fuel cycle U-238/Pu-239 plus Th-232/U-233

The next step is a study of a mixed fuel cycle in the three zone fast breeder reactor. This problem has received much attention and the published papers given in list D should be referred to.

A three zone fast breeder reactor with the geometry shown in table 3.1 has been calculated.

The range of variations covered include

Pu-239 or U-233 in the core
U-238 Th-232 in the blanket

For a given geometry and concentration of fertile and fissile nuclides the influence of the fission products, when the concentrations are increased by a factor 10 results in a reduction in the breeding ratio by 5%. An increase by a factor 10 in proactinium decreases the breeding ratio by only 2% (Fig. 3.4).

For the three zone reactor calculations have also been made for mixed fuel cycles. For the fissile materials Pu-239 and U-233 and for fertile materials with U-238 in the core only and Th-232 in the blanket only.

Table 3.1

OBJECT: Three zones thorium cycle

REACTOR TYPE : Power, Breeder
GEOMETRY : INTERNAL ZONE : Spherical, fertile material
(N) WALL : Metallic
INTERMEDIATE ZONE : Shell: fissile material, active core
WALL : Metallic
EXTERNAL ZONE : Shell, fertile material
WALL, REFLECTOR : Metallic

POWER (GW thermal) : 2.6
POWER DENSITY (GW therm/m³core) : 0.78 - 9.52
NEUTRON FLUX, MEAN (n/cm²s) : $\sim 10^{16}$

FISSILE NUCLIOE : Internal Blanket
: Core - Pu + U233
: Outer Blanket U233
FERTILE NUCLIOE : Internal blanket Core U238
: Outer Blanket - Th 232
DILUTENT : Chlorides
COOLING SYSTEM : External
BREEDING RATIO : 1.09 - 1.14

PARAMETER STUDIED : Thickness of blanket
: Thorium concentration in blanket material
: FP and PA concentration
:
:

METHOD OF NEUTRONIC : ANISN, S4
: 23 Groups
CALCULATION : 80 spatial positions
: P₁ approxim.
: GGC-3 code
: ENDF/B-1 and B-2 Data

Table 3.2 (THOC-300)

Three zone reactor. Volumes and breeding ratio

Geometry: internal blanket, radius 110 cm
 wall, width 3 cm
 core, width 27 cm
 wall 3 cm
 external blanket, width 100 cm
 wall reflector 140 cm

Variable				Results		
Case	Internal fertile (cm)	Internal wall (cm)	U-233 concn. in core ($10^{24}/\text{cm}^3$)	Volume of core (m^3)	Specific power (GW m^{-3})	Breeding ratio, total
B	1.0	1.0	0.0012	0.783	3.36	1.09
C	50.0	2.0	0.0012	1.66	1.57	1.10
D	90.0	3.0	0.0012	3.73	0.70	1.13
E	110	3.0	0.0012	5.62	0.46	1.11
A		3.0				
reference	110		0.0018	3.13	0.80	1.16
F	110	3	0.0008	9.52	0.28	1.14

see Fig. 3.1

(THOCL-300)

Three zone reactor: atomic composition (atomic concentration $\times 10^{24}$)

Internal fertile zone	Wall	Core	Wall	External blanket	Reflector
Th 4.5×10^{-3} Pa 1×10^{-4} U-33 1×10^{-4} Cl 2.2×10^{-2} Na 4.5×10^{-3} variable radius (see Fig. 3.1)	Fe 7×10^{-2} Mo 1×10^{-2}	Th 2.5×10^{-3} Pa 1×10^{-4} U-33 1×10^{-3} U-34 1×10^{-4} variable U-233 concentration (see Table above).	Fe 7×10^{-2} Mo 7×10^{-2}	the same as internal blanket	Fe 7×10^{-2} Mo 1×10^{-2} (remark: wrong reflector with Mo!)

Fig. 3.1 Impact of the radius of the internal blanket (TMOI-300) on the breeding ratio

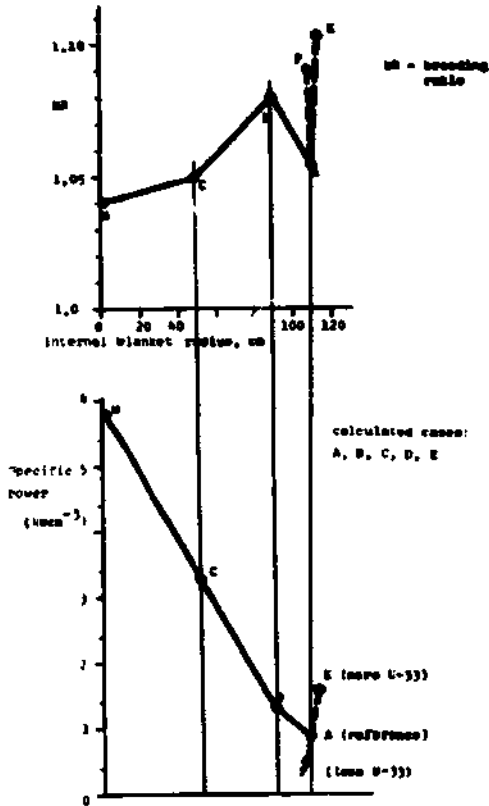


Fig. 3.2 Concentration of thorium and uranium-233 (in mol/cm^3) (TMOI-301)

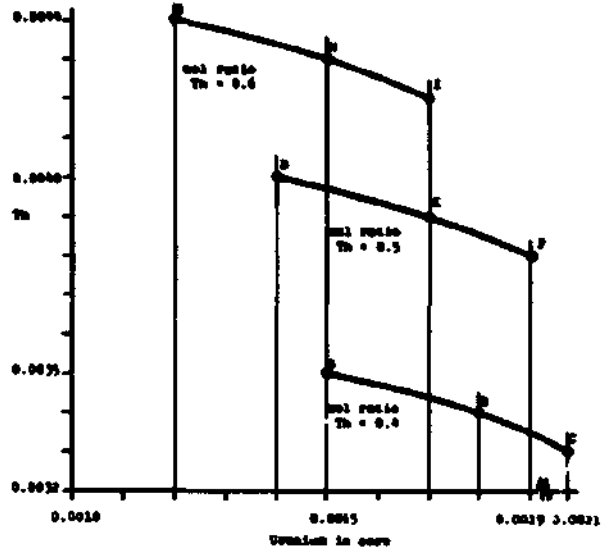


Fig. 3.3 Uranium concentrations for given geometry (TMOI-303) for A, B, C, D, E, F, G, H, I.

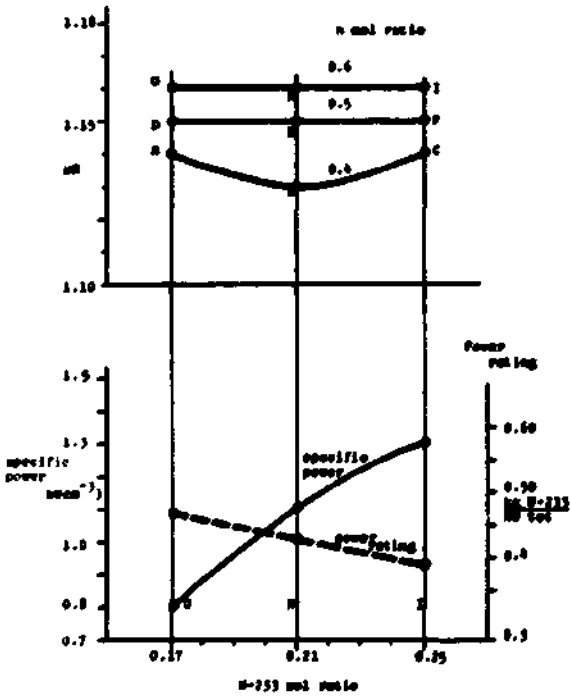


Fig. 3.4 Three zones, mixed fuel cycle Impact of fission products and protactinium (TMOI-305)

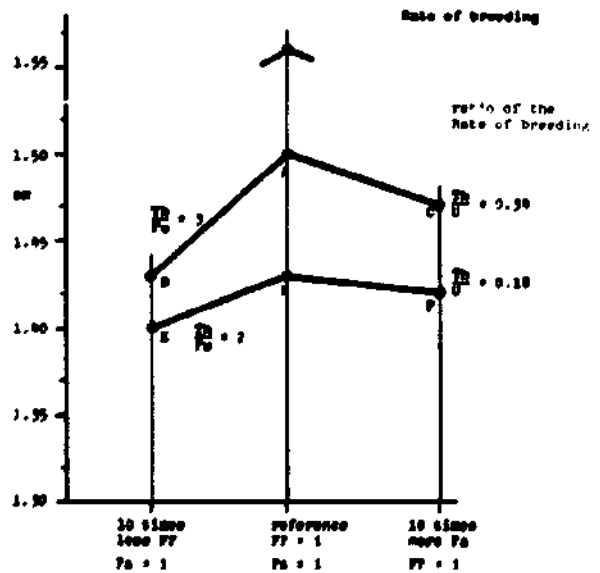


Table 3.3 (THOCL-302)

Influence of FP and Pa concentration

geometry	internal blanket	wall	core	wall	external blanket	reflector
	110 cm	3 cm	19 cm	3 cm	100 cm	40 cm

Case	Fission product content $\times 10^{24} \text{ cm}^{-3}$	Protactinium concentration corresponds to dwelling time, days.			Breeding ratio
		2	6	18	
A	3×10^{-5} , dwelling time = 3 days	1×10^{-5}	3×10^{-5}		1.119
B					1.124
C		9×10^{-5}		9×10^{-5}	1.123
D	9×10^{-5} , dwelling time = 10 days	1×10^{-5}			1.1238

see also Fig. 3.4

Remark Table 3.4 canceled

The influence of parameter variations is given in Fig. 3.5. The following results can be noted:

the breeding ratio increases (under the given conditions) when

- the concentration of U-233 in the core decreases and U-238 increases
- when the internal wall thickness is halved (note this is very sensitive due to the presence of 15 atom% of molybdenum)
- when the outer fertile radius increases
- when the inner fertile zone radius increases.

3.3 The three zone reactor - uranium-plutonium fuel cycle

The reference reactor is described in table 3.5 and 3.6. The thermal flux in all three zones, the external breeding zone, the fuel and the internal breeding zone is only 10^{-8} of the total flux and in the external blanket reaches 10^{-6} of the total flux. The total flux has a relatively flat distribution and even in the fuel region the max. to mean ratio is only about 1.13 (Fig. 3.6 and Fig. 3.7).

The neutron flux is rather hard and the mean neutron energy (calculated as the mean of the no. of fissions) is around 370 keV (see Fig. 3.9). In a typical LMFBR and in a gas cooled fast breeder this value is 120 keV and 176 keV respectively.

A good illustration of the influence of the most important parameters on the breeding ratio is given in table 3.7. The differences between these calculations and the computer output is approx 8%.

Fig. 3.5 Three zones; mixed fuel cycle
Impact of selected parameters on the breeding ratio (MFR-1)

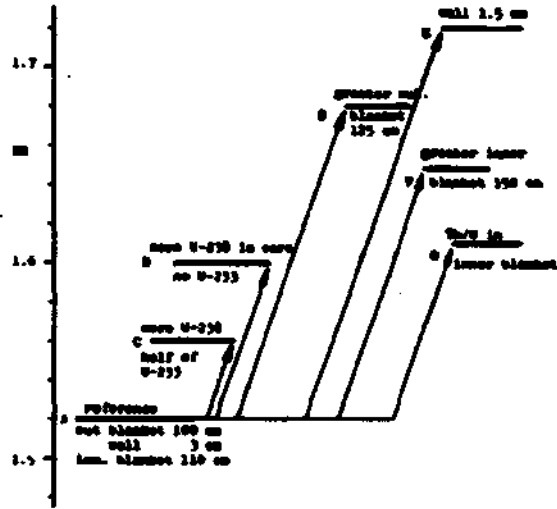


Fig. 3.6 Three zones; uranium-plutonium fuel cycle
Neutron Flux in reference reactor

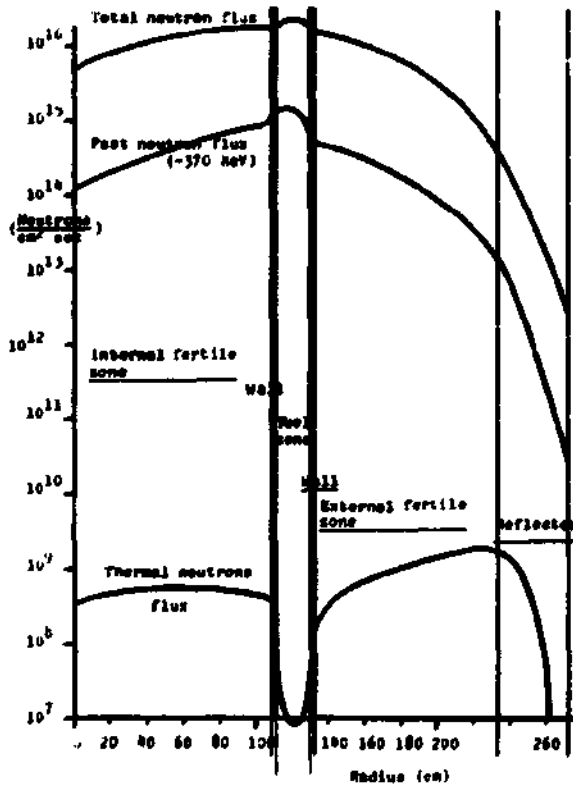


Table 3.5

OBJECT : Uranium-plutonium cycle - Maximum breeding ratio in three zones

REACTOR TYPE : Optimised breeder
GEOMETRY : INTERNAL ZONE : Spherical fertile zone
(M) WALL : Iron, Molybdenum
INTERMEDIATE ZONE : Core, Fuel
WALL : Iron, Molybdenum
EXTERNAL ZONE : Fertile zone
WALL, REFLECTOR : Iron

POWER (GW thermal) : ~6
POWER DENSITY (GW therm/m³ CORE) : 1.1
NEUTRON FLUX, MEAN (n/cm²s) : ~10¹⁶ - 10¹⁷

FISSILE NUCLIDE : Internal Blanket: small amounts of Pu239, U239
: Core Pu 239, Pu240, Pu241, 0.7: 1.2: 0.1:
: External Blanket: small amounts of Pu239, U239
FERTILE NUCLIDE : Internal Blanket U238
DILUTENT : Chlorides, Sodium
COOLING SYSTEM : Outer
BREEDING RATIO : 1.64 - 1.95

PARAMETER STUDIED : Plutonium-uranium ratio
: With and without uranium
: Reflector, Fe, Pb
:

METHOD OF NEUTRONIC : see chapter 1
CALCULATION :
:

Table 3.6 (200/C)

Three Zones reactor: uranium-plutonium fuel cycle.

Radius cm	Width of zone cm	Zone	Composition atoms/ 10^{24} cm ³	Flux thermal; total, Breeding ratio	Specific power GW/m ³ , Temperature:
0	110.0	I Central fertile zone	U-238 6.4×10^{-3} Pu-239 6.0×10^{-5} F.P. 2.0×10^{-5} Na 3.4×10^{-3} Cl 2.27×10^{-3}	$\frac{1.05 \times 10^{16}}{3.7 \times 10^7}$ BR 0.490	$T_{inlet} = 700^{\circ}\text{C}$ $T_{outlet} = 800^{\circ}\text{C}$
110.0			II Wall	Fe 7×10^{-2} Mo 1×10^{-2}	$\frac{1.15 \times 10^{16}}{9 \times 10^7}$
113.0	17.9	III Fuel zone	Pu-239 1.3×10^{-3} Pu-240 4.2×10^{-4} Pu-241 2.1×10^{-4} U-238 4.2×10^{-3} F.P. 2.0×10^{-5} Na 3.4×10^{-3} Cl 2.6×10^{-2}	$\frac{1.02 \times 10^{16}}{6.6 \times 10^7}$ BR 0.22	1.1GW/m^3 $T_{inlet} = 750^{\circ}\text{C}$ $T_{outlet} = 1050^{\circ}\text{C}$
130.9			IV Wall	Fe 7.0×10^{-2} Mo 1.0×10^{-2}	$\frac{8.24 \times 10^{15}}{2.4 \times 10^8}$
133.9	100.0	V External fertile zone	the same as central fertile zone, I	$\frac{3.9 \times 10^{14}}{1.9 \times 10^9}$ BR: 1.040	$T_{inlet} = 700^{\circ}\text{C}$ $T_{outlet} = 800^{\circ}\text{C}$
233.9			VI	Fe 8.0×10^{-2}	$\frac{5.2 \times 10^{12}}{5 \times 10^8}$
273.9					

Fig. 3.7 Three zones: uranium-plutonium fuel cycle
Total flux in the fuel zone

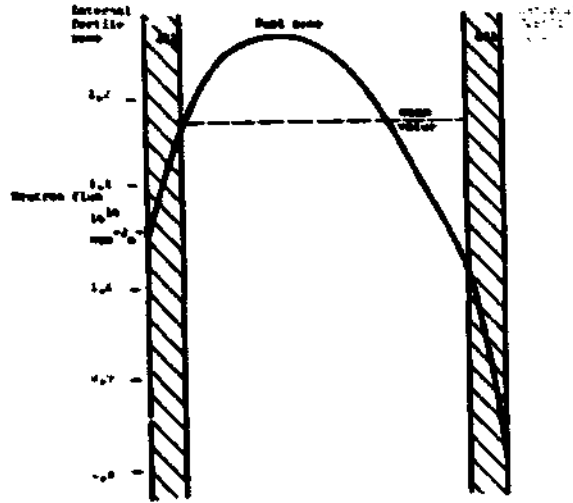


Fig. 3.8 Three zones: uranium-plutonium fuel
Spectrum in fuel zone

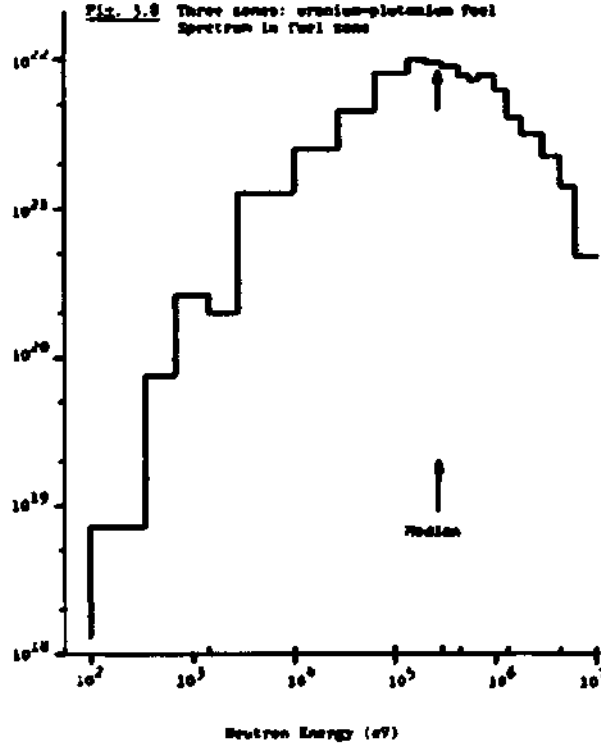


Table 3.7 Three Zone reactor: uranium-plutonium fuel

Simplified calculation of the breeding ratio and neutron balance.

	Parameter		Component of breeding ratio
Median energy	keV	370	
Pu-239	σ_f (barn)	1.83	
(from computer output)	σ_c (barn)	0.180	
	ν	2.95	
	α	0.0984	
Breeding potential	$(\eta-1)$	1.6857	1.685
Fission ratio fertile/fissile	δ	0.37	
Fast bonus	$\frac{(\nu-1)}{1+\alpha}$	0.539	0.539
Total positive			2.225
Losses (absorption in FP, Cl, Na, Mo, Fe)		0.160	
Leackage (arbitrarily)		0.10	
Total losses	$\frac{\text{Loss}+\alpha}{1+\alpha}$	0.32	0.320
Calculated BR (micro)			1.890
Computed BR (macro)			1.752

3.4 The three zone breeder reactor: Very high breeding gain

One of the most important factors in achieving a very high breeding ratio is the hardness of the neutron flux. This is strongly influenced by the fuel composition.

In this case the fuel is postulated to be a mixture of

$$a \text{ PuCl}_3 + b \text{ NaCl} + c \text{ UCl}_3 \quad \text{where}$$
$$a = 0.1 - 0.2, \quad b = 0.7 - 0.8, \quad c = 0.1 - 0.2$$

Unfortunately not all data are available for this system. (see Fig. 6.9)

The rough calculations on changing the concentration of PuCl_3 in the melt of NaCl (Fig. 3.9) shows a rather sharp decrease of breeding gain (BG) for decreasing plutonium concentration, especially when the plutonium molar ratio to sodium is lower than 0.25.

In spite of these uncertainties of the PuCl_3 - NaCl - UCl_3 system, the influence of the U-238 in the fuel has also been calculated. For a constant PuCl_3 concentration with a simplified assumption for the NaCl concentration the results are given in Fig. 3.10 and 3.11.

Increasing the ratio of uranium to plutonium in the fuel from 0 to 3 causes the total breeding gain to increase from 0.65 to 0.95. This is rather clear and thus the reference reactor concept includes uranium in the fuel in a ratio of 2 : 1 to plutonium.

Such a high breeding gain is a special feature of this type of reactor for producing large quantities of fissile material.

Fig. 3.12 and 3.13 give the results of calculation when the radius of the central fertile zone is varied. Table 3.8 shows the simplified calculation of central and external fertile zone breeding ratios.

Fig. 3.8 Impact of Plutonium Concentration

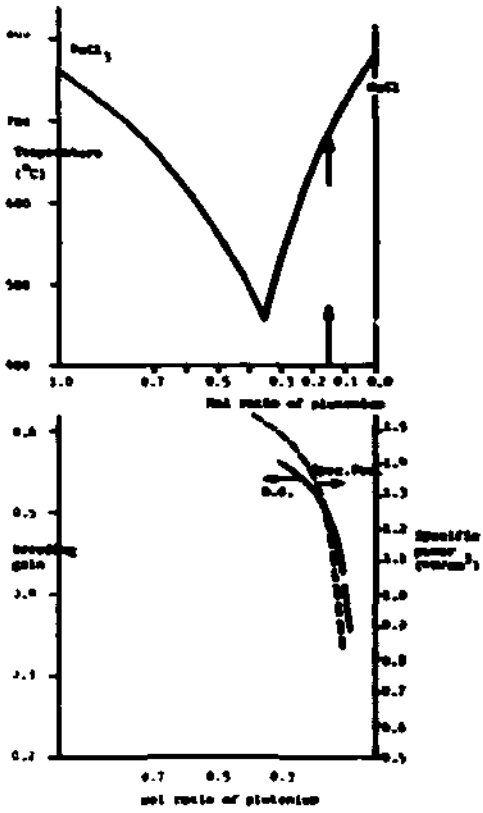


Fig. 3.10 Three zones: uranium-plutonium fuel cycle Impact of U-235 concentration in the fuel Pu-concentration: $0.001 \text{at}\% \text{ atoms/cm}^3$

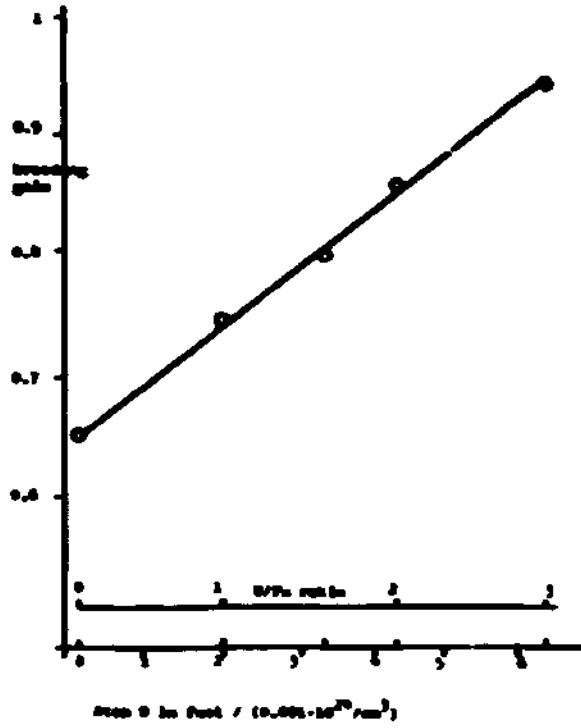


Fig. 3.11 Three zones: uranium-plutonium fuel cycle Impact of Uranium concentration in the fuel (202/203) versus control fertile zone


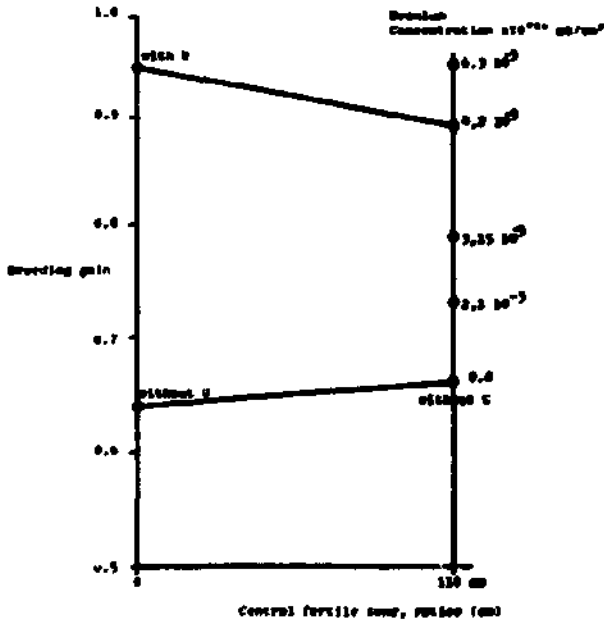


Fig. 3.12 Three zones: uranium-plutonium fuel cycle Impact of control fertile zone radius (1% U in fuel)

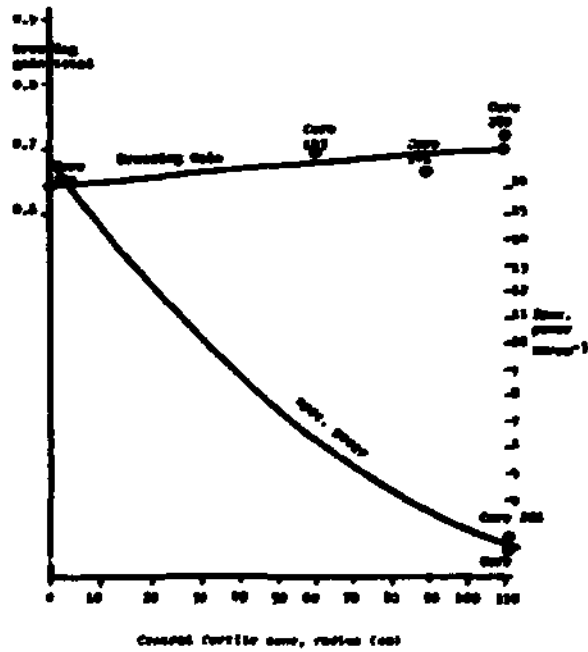

From these results the following conclusions can be drawn

- increasing the radius of the internal fertile zone up to 110 cm increases the breeding gain for a given type of fuel. The effect of wall and fertile material changes are insignificant
- at the same time the specific power decreases dramatically
- increasing the U/Pu ratio from 2 to 3.6 does not influence the total breeding gain (see Fig. 3.13)
- the FP concentrations play a rather significant role (Fig. 3.14)

Table 3.9

	Internal fertile zone			Fuel zone		External fertile zone			Total breeding ratio
Case Number	Pu-239 _f	U _{fiss}	U _{cap}	Pu-239 _f	Pu-241 _f	Pu-239 _f	U _{fiss}	U _{cap}	
	0xv	0xv	0xv	0xv	0xv	0xv	0xv	0xv	
three zones (200)	0.14	0.300	0.8	3.05	0.351	0.33	0.47	1.83	1.70
two zones (190)	-	-	-	3.63	0.367	0.04	0.48	2.50	1.53

The influence of the 40 cm reflector if changed from iron to lead is not very great as shown in table 3.9

Fission product concentration however plays a very important role. For a given reactor design and given fuel and fertile compositions, increasing the concentration of fission products (simulated here with Cs-133 only) from 2×10^{-5} to 2×10^{-4} (in $10^{23}/\text{cm}^3$) decreases the breeding gain from 0.65 to 0.36 when the specific power decreases less than a factor two.

Table 3.9 Three zone reactor: uranium-plutonium fuel

Central fuel (Core 180)
 (wall 2.5 cm Pu = $2.1 \times 10^{-3} \times \text{atom}/10^{24} \text{cm}^3$)

Case	A	B	C
Uranium 238 in fuel	no	yes	no
		$4.2 \times 10^{-3} \times 10^{24} \text{atom}/\text{cm}^3$	
Reflector 40 cm: material	Fe	Fe	Pb
Volume fuel $\times 10^5 \text{cm}^3$	2.95	2.40	2.97
Spec. power in fuel kW/cm^3	18.4	23.0	18.3
Breeding ratio total	1.64	1.94	1.66
Total flux of fuel zone $n/\text{cm}^2\text{s}$	1.18×10^{17}	1.25×10^{17}	1.187×10^{17}

Fig. 3.15 Three zones: uranium-plutonium fuel
 Breeding ratio versus radius of internal fertile zone


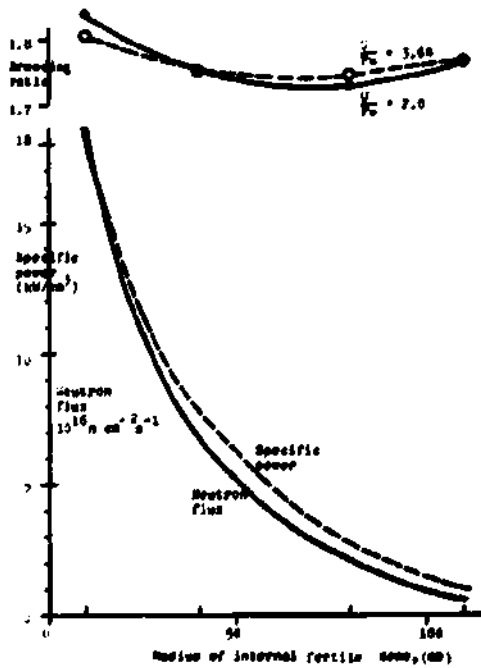


Fig. 3.16 Three zones: uranium-plutonium fuel
 Impact of Fission Products Concentration in fuel
 (very simplified, from different calculations)

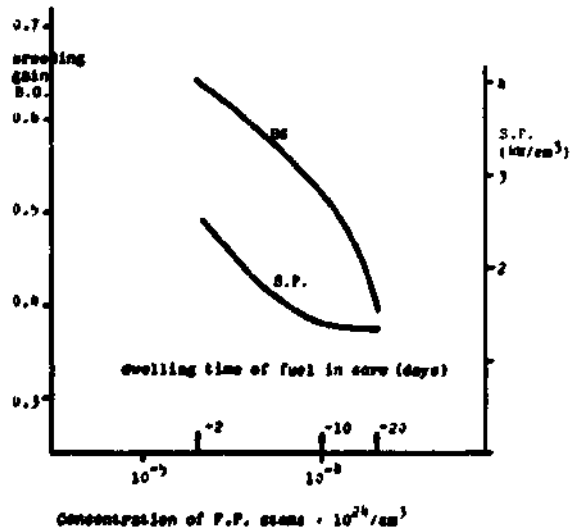

In the steady state reactor a concentration of 2×10^{-5} atoms F.P. $\times 10^{24}/\text{cm}^3$ for a fuel having 2.1×10^{-3} atoms $Pu \times 10^{24}/\text{cm}^3$ is reached for a specific power of $2 \text{ GW}/\text{m}^3$ after a time t of

$$t = \frac{(2 \times 10^{-5}) \times 10^{24}}{(2 \times 10^{-3}) (3.1 \times 10^{10}) \times 2} = 1.61 \times 10^5 \text{ s}$$

that is after 1.87 days. The higher fission product concentration - that is 2×10^{-5} corresponds to 18.7 days of mean dwell time f or the fuel in the reactor.

The influence of chlorine-37 separation may now be looked at. The influence of each absorber on the breeding ratio is given by

$$B = \frac{A + D + L + \alpha}{1 + \alpha}$$

B = decrement of breeding ratio

A = absorption rate in a given absorber

D = absorption rate in rest of absorbers

L = leakage

$\alpha = \sigma_c / \sigma_f$

It can be postulated that for a strong absorber in a hard (fast) spectrum that

$$A = 0.15$$

$$D + L = 0.15$$

$$\alpha = 0.15$$

The relative influence on the rather high breeding ratio of 1.6 results in a case where the profit of the separation factor will be for example 0.3 then

$$\Delta B = \frac{0.9 \times 0.15}{1.15} = 0.12$$

and in relation to the breeding gain

$$\Delta G = \frac{0.12}{0.6} = 0.20$$

which results in an increase in doubling time of

$$\frac{T_2}{T_2} = \frac{G}{G+\Delta G} = 0.83$$

It can be seen that introducing three zones does not result in any significant increase in the breeding gain (table 3.10). Therefore the two zone reactor must be preferred for its simpler layout.

Table 3.10 Fuel in central zone (2 zone reactor) versus fuel in middle zone (3 zone reactor)

Core, Case Number		Two zones (conventional) (100)	Three zones (nonconventional) (200)
Geometry	Central Zone Middle Zone Outer Zone	Fuel 100 cm --- Blanket 100 cm	Blanket 110 cm Fuel ~18 cm
Thermal power, GW		6	6
Pu/FP ratio		$2.1 \times 10^{-3} / 2 \times 10^{-5}$	$2.1 \times 10^{-3} / 2 \times 10^{-5}$
Spec. power, kW/cm ³		17.7	1.41
Power in fuel, %		90.9%	76.2%
Flux total left, in fuel right }	boundary	$\frac{2.04 \times 10^{17}}{1.15 \times 10^{17}}$	$\frac{1.2 \times 10^{16}}{1.08 \times 10^{16}}$
Flux in left outer } blanket right }	boundary	8.99×10^{16} 2.16×10^{15}	9.7×10^{15} 1.5×10^{14}
Breeding gain		0.63	0.70
Median energy (group)		~9	10

3.5 The two zone fast breeder. Fuel of uranium plutonium fluorides

3.5.1 Introduction

The aim of this section is to give a rough idea of a fast breeder power reactor having the fuel in form of plutonium trifluoride in the molten state instead of molten chloride. (Table 3.11)

The earlier suggestions for a reactor of this type came from A.M. Weinberg.

The first attempts at carrying out calculations on a reactor of this type were not successful because a fuel was chosen having a high concentration of light metals, lithium and beryllium.

A very rough attempt by J. Ligou and the author (1972) shows the possibility for a fast breeder reactor with molten plutonium fluoride where the light metals were eliminated and the melting point increased.

P. Faugeras (Fautenay aux Roses) claimed that the fluoride of U-233 and Th-232 can be used for non-thermal reactors.

Some preliminary results for a three zones reactor are given in a short form in Table 3.12. The neutron flux remains rather hard (Fig. 3.15).

3.5.2 Arbitrary assumptions and uncertainties

The fuel composition has been arbitrarily chosen since the appropriate data is lacking in the literature. In most cases the following fuel composition has been used



another alternative would be



Table 3.11

OBJECT : Fast Breeder, Molten Fluoride, Three zones

REACTOR TYPE	:	Power	
GEOMETRY :	INTERNAL ZONE		= Fertile zone
(M)	WALL		Iron, Graphite
	INTERMEDIATE ZONE :		Fuel, fluoride
	WALL :		Iron, Mo, Graphite
	EXTERNAL ZONE :		Fertile zone
	WALL, REFLECTOR :		Iron

POWER (GW thermal)	:	6
POWER DENSITY (GW therm/m ³ CORE)	:	3.5
NEUTRON FLUX, MEAN (n/cm ² s)	:	10 ¹⁶

FISSILE NUCLIOE :	Plutonium. Fuel composition PuF ₃ , NaF, ZrF ₄
:	
FERTILE NUCLIOE :	U-238
DILUTENT :	NaF, ZrF ₄
COOLING SYSTEM :	External
BREEDING RATIO :	1.38 (up to 1.51 with higher specific power)

PARAMETER STUDIED :	Wall structural material: graphite
:	Wall: beryllium, Iron, thickness
:	Fission product concentration
:	


METHOD ON NEUTRONIC CALCULATION :	FLUORIDE+ recalculated	ANISN
:	from Hansen-Roach	Regions 6
:	Fission product only as Cs-133	Meshes 110
		Order of quadrature S ₄
		Anisotropy P ₁
		23 neutron groups
		incl. thermal ENDF B/III

Table 3.12 Design of fast breeder molten fluoride reactor
(Three zone: 6 GW(thermal))

Power rating, total = 1 kg Pu/MWth, Doubling time = 6.5 years.

Radius cm	Zone		Components molecules per cm ³ x10 ²⁴		Flux $\frac{\text{total}}{\text{thermal}}$	Breeding ratio
0	I	Internal Blanket liquid state	UF ₄ NaF PuF ₃	6x10 ⁻³ 6x10 ⁻³ 6x10 ⁻⁵	$\frac{1.8x10^{16}}{5.8x10^{12}}$ T _{mean} = 800°C	0.42
80.0	II	Wall	Fe Mo (graphite is also possible)	7x10 ⁻² 1x19 ⁻²	$\frac{1.86x10^{16}}{2.2x10^{12}}$	--
81.0	III	Fuel liquid state	Pu-239 F ₃ Pu-240 F ₃ Pu-241 F ₃ NaF ZrF ₄ F.P. (Cs133)	1.47x10 ⁻³ 4.2x10 ⁻⁴ 2.1x10 ⁻⁴ 7.5x10 ⁻³ 5.1x10 ⁻³ 0.2x10 ⁻³	$\frac{1.57x10^{16}}{1.00x10^{16}}$ T _{inlet} = 750°C T _{out} = 1050°C	fertile material Pu-240 0.056
98.2	IV	Wall	Fe Mo (graphite is also possible)	7x10 ⁻² 1x10 ⁻²	$\frac{1.37x10^{16}}{5.2x10^{12}}$	--
100.2	V	External blanket liquid state	UF ₄ NaF PuF ₃	6x10 ⁻³ 6x10 ⁻³ 6x10 ⁻⁵	$\frac{8.8x10^{13}}{2.5x10^{11}}$ T _{mean} = 800°C	0.889
200.0	VI	Reflector			$\frac{3.5x10^{11}}{5.3x10^6}$	--
240.0					Total	BR = 1.36

Fig. 3.02 Neutron spectrum in carbon fluoride fast reactor (rough)

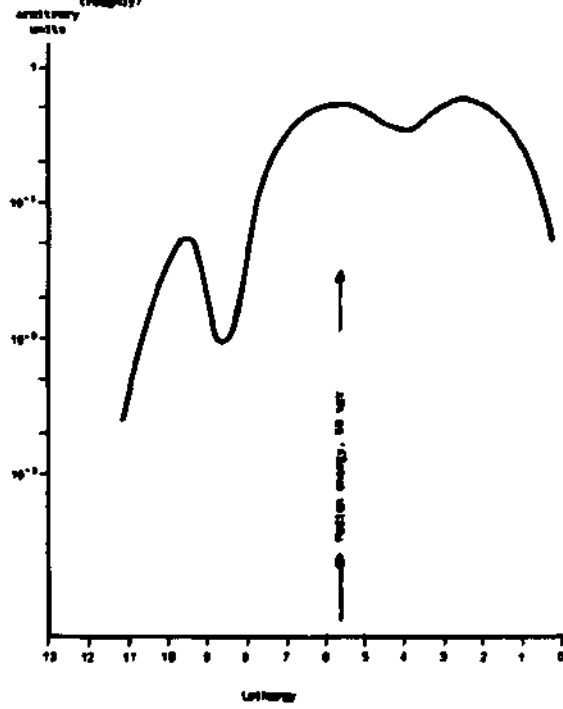

The results obtained, in spite of the uncertainties are encouraging. The simplified breeding ratio calculation gives a BR_{tot} of 1.51 and the computed value is $BR_{tot} = 1.465$ (table 3.13).

Table 3.14a shows that the influence of fission products is very significant (see also Fig. 3.16). However the change of structural material of the wall from beryllium to iron has only a small effect on the breeding ratio and specific power (table 3.14b and Fig. 3.17).

In the calculations for three zones studies here, increasing the radius of the internal fertile zone from 60 cm to 80 cm, that is a volume increase of 2.37 has little effect on the total breeding ratio in spite of changes in the regional breeding ratios (table 3.15a and Fig. 3.18).

Altering the small amounts of plutonium in the fertile material as a result of reprocessing efficiencies also has only a small effect on the breeding ratio and specific power (table 3.15b and Fig. 3.19).

Because of the good experience of American and French groups using graphite as a structural material for molten fluoride thermal breeders, calculations have been made using graphite for separating walls for fast breeders. Graphite 2 cm thick as the wall material was chosen.

The results are rather encouraging. The breeding ratio using graphite is still very high, even slightly higher and the specific power in the fuel is lower (table 3.16a and Fig. 3.20).

Changing from the complicated design of three zones with fuel in the intermediate shell, to the "classical" two zone design having fuel in the central region results in a dramatic increase in specific power to a prohibitive 26 kW.cm^{-3} (table 3.16b, Fig. 3.21, table 3.17).

Table 3.13 Simplified calculation of the breeding ratio

Median energy (from computer calculation)	keV	60
Pu-239	σ_f (barn)	1.459
	σ_c	0.2328
	ν	2.899
	α	0.19
	η	2.4568
	$\eta - 1$	1.4568
U-238 (arbitrary)	ν'	2.60
Fast fission of fertile component (from computer output)	δ	0.25
Fast bonus	$\frac{(\nu'-1) \times \delta}{1+\alpha}$	0.34
Total positive	Σ positive	1.79
<hr/>		
Losses by absorption (from computer)	L_{ab}	0.1
Leakage (assumption)	L_{leak}	0.05
Total losses	L_{tot}	0.15
Total negative	$\frac{L_{tot+\alpha}}{1+\alpha}$	0.28
<hr/>		
Breeding ratio = total positive - total negative	BR (micro)	1.510
Breeding ratio (from computer output)	BR (macro)	1.465

Table 3.14a Three zones reactor: fluoride fuelled fast breeder reactor

Influence of Fission Products.

BR = Breeding ratio, total

Core Number	Wall fuel/external blanket 2 cm	Fission products (Cs-133) atoms/cm ³ x 10 ²⁴	B.R.	Specific power GW/m ³
163	Be	0.0001	1.437	4.33
164	Be	0.0002	1.427	4.24
166	Be	0.0040	1.14	2.32
167	Fe	0.0040	1.12	2.10

(see also Fig. 3.15)

Table 3.14b Three zones reactor: fluoride fuelled fast breeder reactor

Influence of the beryllium-moderator

F.P. = 0.0002 atom x 10²⁴/cm³

Core Number	Material		B.R.	Specific power GW/m ³
	2 cm	1.5 cm		
164	Be		1.427	4.24
162		Be	1.464	4.19
165	Fe		1.38	3.45
161		Ce	1.37	3.47

(see also Fig. 3.17)

Fig. 3.16 Impact of fission products

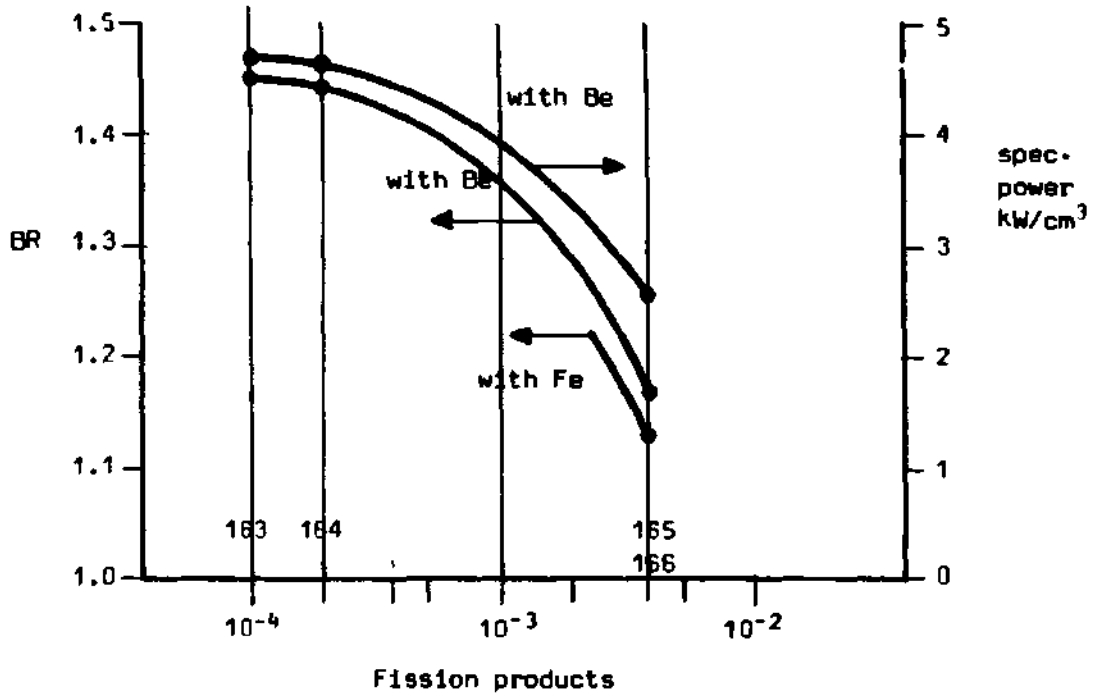


Fig. 3.17 Impact of the beryllium and iron moderator on BR and spec. power

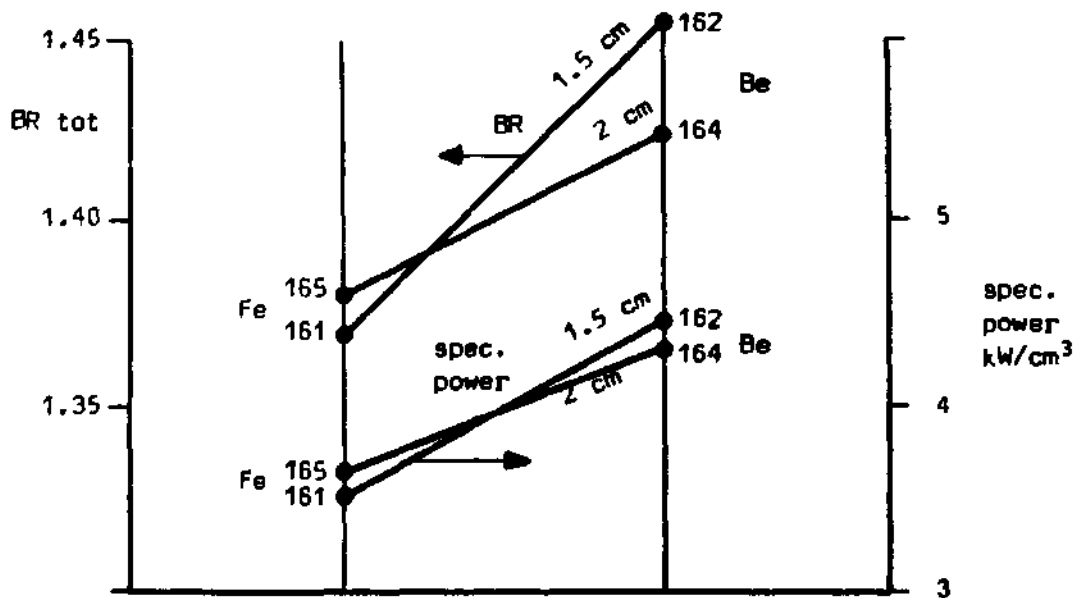


Table 3.15a Three zone reactor: fluoride uranium-plutonium fuel
Influence of the radius of the internal fertile zone

Number of Core	Radius of internal fertile zone, cm	Breeding ratio			
		internal fertile zone	fuel	external fertile zone	total
165	80	0.42	0.056	0.889	1.364
169	60	0.34	0.053	0.99	1.379
Ratio of cores $\frac{165}{169}$	Ratio of volume 2.37	1.21	1.05	0.898	0.989

(see Fig. 3.18)

Table 3.15b Three zone reactor: fluoride uranium-plutonium fuel
Influence of Pu-239 in the fertile material

Number of core	Pu-239 in fertile material	F.P. concentration	B.R. tot	Spec. power GW/m^3
168	0.001	2×10^4	1.49	3.79
161	0.01	2×10^{-5}	1.37	3.471
Ratio of cores $\frac{168}{161}$	8.1	10	1.09	1.09

(see Fig. 3.19)

Fig. 3.18 Three zones fluoride uranium-plutonium fuel
Impact of radius of internal blanket

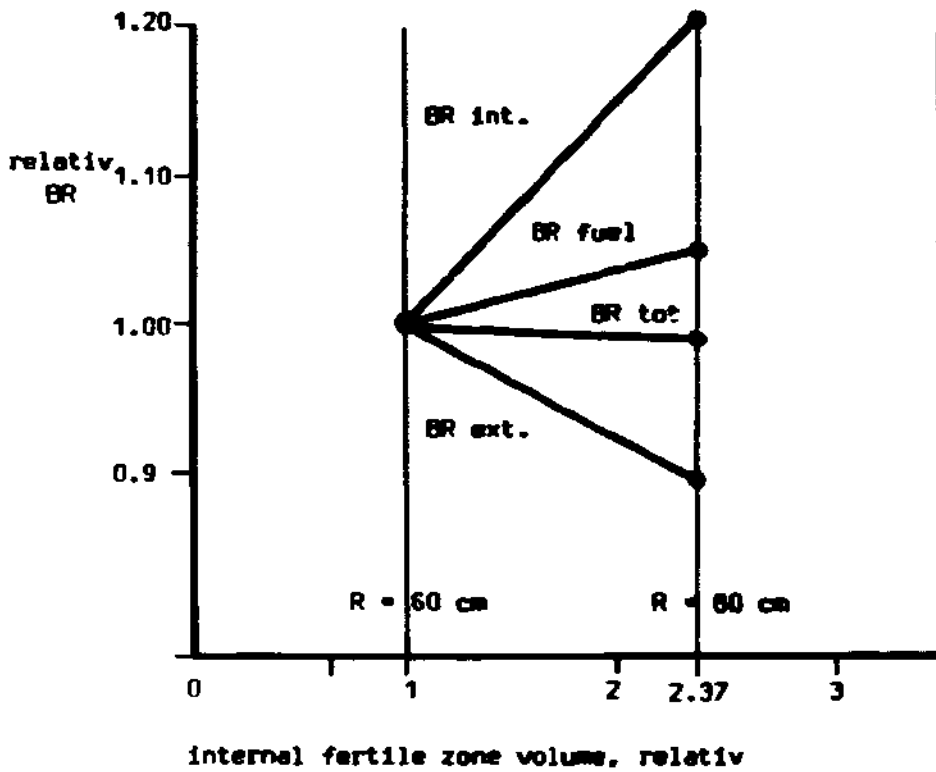


Fig. 3.19 Three zones: fluoride uranium-plutonium fuel
Impact of Pu-239 in fertile material

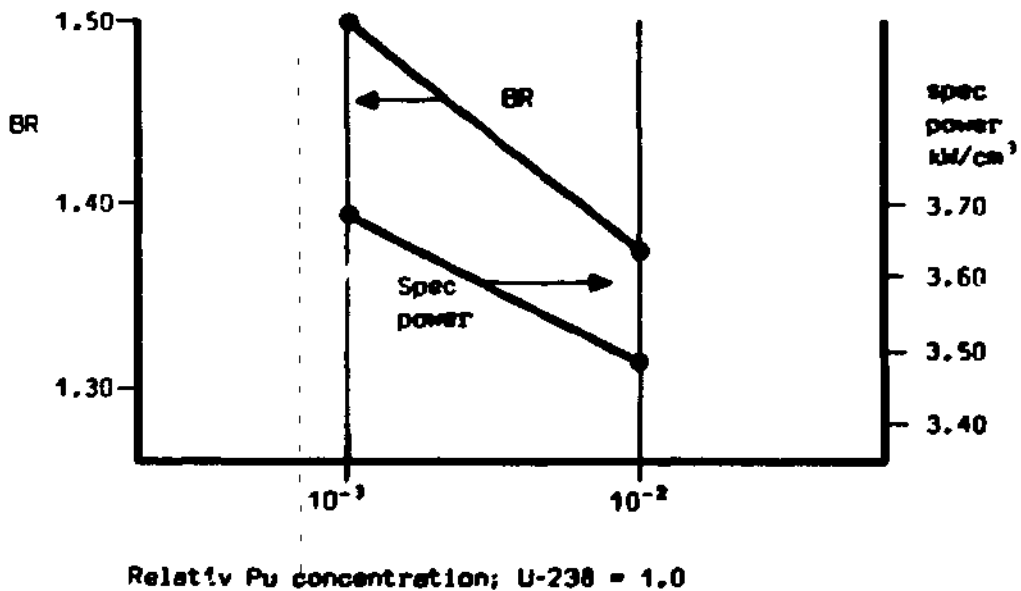


Table 3.16a Three zones reactor: fluoride uranium-plutonium fuel
Influence of graphite as structural material

Number of core	1st wall between internal fertile zone and fuel 2 cm	2nd wall between fuel and external fertile zone 2 cm	B.R. Total	Spec. power: GW/m ³
164	Fe, Mo	Be net	1.427	4.24
171	C graphite	C graphite	1.45	3.65
Ratio of cores $\frac{171}{164}$	$\frac{\text{graphite}}{\text{Fe}}$	$\frac{\text{graphite}}{\text{Be}}$	1.02	0.86

(see Fig. 3.20)

Table 3.16b Two zones reactor: fluoride uranium-plutonium fuel
Influence of the geometry of the reactor

Number of core	Structure			B.R. total	Spec. power GW/m ³
	Internal zone	Intermediate zone	External zone		
160 two zone reactor	Fuel	Blanket zone	Cooling zone	1.424	26.7
101 three zone reactor	Blanket	Fuel cooled out of core	Blanket	1.37	3.47
Ratio of cores $\frac{160}{101}$				1.04	7.69

(see Fig. 3.21)

Fig. 3.20 Three zones-fluoride uranium-plutonium fuel
Graphite instead of beryllium as a structural material

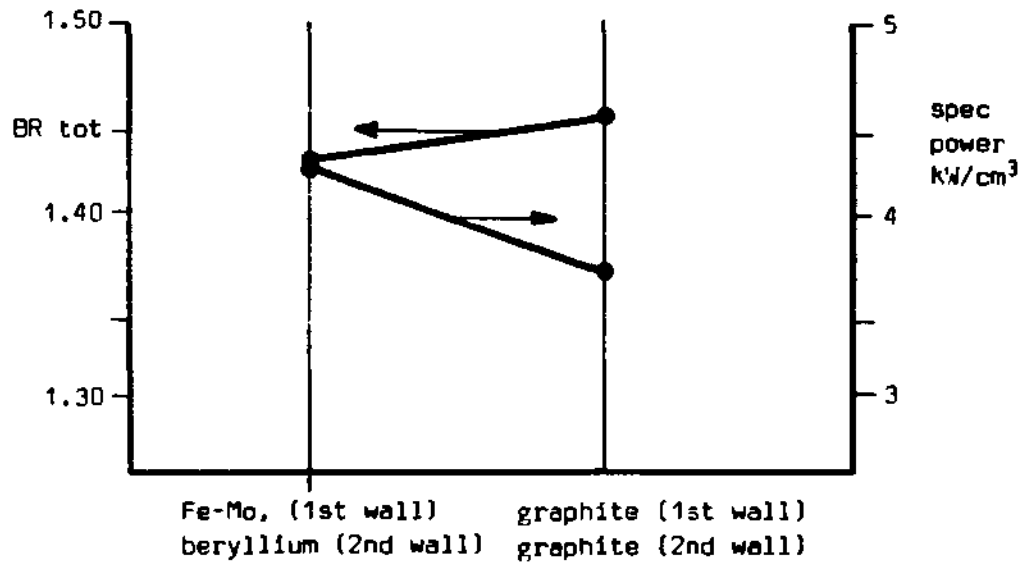


Fig. 3.21 Two zones: fluoride uranium-plutonium fuel
Impact of geometry


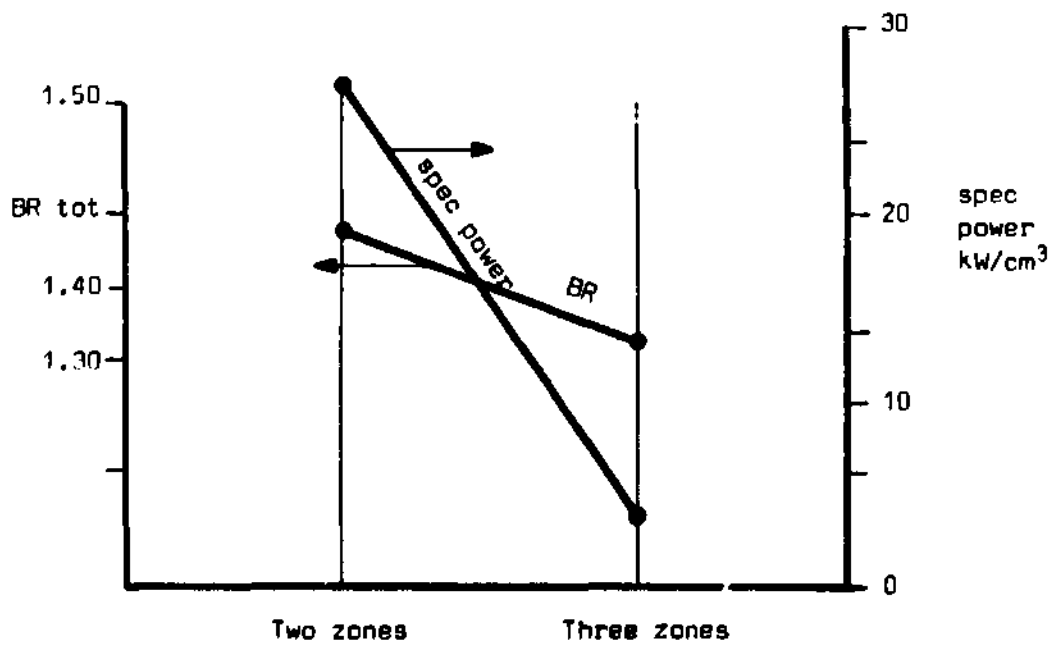


Table 3.17 Three zones reactor: fluoride uranium-plutonium fuel
influence of the plutonium concentration

Number of Core	Pu total in fuel Mol %	Atoms $\frac{\text{Atoms}}{\text{cm}^3 \times 10^{-24}}$	B.R. tot.	B.G. gain	Spec. Power GW/m^3
165	14	0.0022	1.38	0.38	3.45
172	7	0.0011	1.05	0.05	4.05
Ratio of cores $\frac{172}{165}$	0.5	0.5	0.76	0.13	1.17

Fig. 3.22 Burner reactor with molten fluoride fuel
Fuel: PuF_6 -3.54 MgF_2 -2.41 ThF_4
Specific power $\sim 20 \text{ kWm}^{-3}$
Total power 11 GW (thermal)

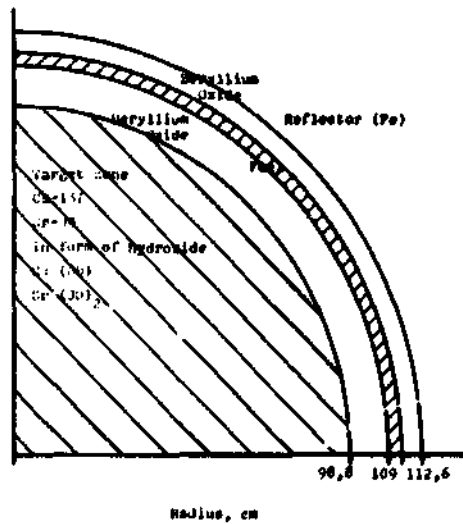

3.6 High Flux Reactor with Fluoride Fuel

Can a fluoride fuelled burner, as opposed to a chloride fuelled reactor be considered as a reactor for transmuting fission products? (See chapter 4, for the high flux transmutation reactor).

In such a reactor a fuel made up of $\text{PuF}_3/5.4 \text{ NaF}/2.4 \text{ ZrF}_4$ has been assumed. The calculations have been carried out for a larger burner of 11 GW(th) and the fission products are assumed to be generated in a total system of 55 GW(th).

The results are not encouraging in spite of the fact that the neutron flux in the target region was 1.05 times higher for the fluoride fuelled reactor as opposed to the chloride fuelled reactor (Table 3.18, Fig. 3.22).

The effective half life of both fission product nuclides was (in years)

	In fluoride fuelled reactor	In chloride fuelled reactor (reference)
Cs-137	8.57	8.93
Sr-90	1.73	1.83

These "benefits" must be balanced against a specific power which is twice as high as the reference case. In the fluoride core this is 19.9 GW.m^{-3} and for the chloride reactor 10.1 GW.m^{-3} . Such a high specific power is not realisable.

In addition since graphite might be used in place of beryllium oxide as moderator (possible for a neutronic viewpoint) a significant improvement in corrosion problems is obtained. This has been proved by the excellent experience of Oak Ridge National Laboratory with one proviso - at ORNL the fuel was $\text{LiF} - \text{BeF}_2 - \text{ThF}_4 - \text{UF}_4$.

Table 3.18 High-flux burner reactor with fluoride fuel

Total power 11 GW(th)
 Burning fission products form a total system of
 55 GW(th)

Zone Radius (cm) Volume (m ³)	Components (atom 10 ²⁴ cm ⁻³)	Neutron flux 10 ¹⁶ cm ⁻² s ⁻¹ <u>total</u> thermal	Specific power (GW m ⁻³) Transmutation rate (s ⁻¹)
I 0 - 98.8 cm Target zone Vol: 4.1 m ³	Cs-137 0.0116 Sr-90 0.0016 Oxygen 0.0145 Deuter 0.0145	<u>4.01</u> 2.21	Cs-137 : 1.8x10 ⁻⁹ Sr-90 : 1.2x10 ⁻⁸
II 98.8 - 109 cm Moderator, wall	Be 0.060 Oxygen 0.060 with thin graphite layer	<u>5.09</u> 1.83 <u>5.25</u> 0.239	
III 1.9 - 112.6 cm Fuel zone Vol: 0.55 m ³	Pu-239 0.0017 Pu-240 0.00042 Pu-241 0.00021 Na 0.0075 Zr 0.0051 F 0.0340	<u>5.02</u> 0.0457	19.9 GW m ⁻³
IV 112.6 - 118.6 cm wall	Be 0.060 Oxygen 0.060	<u>4.87</u> 0.034 <u>3.9</u> 0.041	
V 118.6 - 218.0 cm Reflector zone	Fe 0.08	<u>0.0023</u> 2.8x10 ⁻⁹	

4. A HIGH FLUX BURNER REACTOR FOR TRANSMUTATION

4.1 Need for fission product transmutation

4.1.1 Introduction


The problems associated with the management of highly radioactive fission product waste has been intensively and extensively discussed (Fig. 4.1).

Here only the transmutation of fission products (F.P.) is dealt with. The recycling of the actinides is not treated. Transmutation occurs by using neutron irradiation in a fission reactor.

A short outline of this chapter can be presented in the form of the following questions

- why, contrary to many assertions, is neutron transmutation in a fusion reactor not feasible? - this in spite of the fact that the fusion machine has often been proposed for this purpose
- why are recent opinions concerning transmutation in fission reactors rather pessimistic?
- could transmutation in a fission reactor be possible taking into account the neutron balance in a breeding system?
- which fission products are candidates for irradiation in a fission reactor?
- is the rate of transmutation sufficiently high in a fission reactor?
- in what type of reactor is the transmutation physically possible?
- what are the limiting parameters for transmutation in a solid fuelled fission reactor?
- is a very high flux fission reactor possible if the fuel is in the liquid state instead of the solid state?

Fig. 4.1 POSSIBILITIES FOR TRANSMUTATION OF ^{90}Sr AND ^{137}Cs
(see also table 4.1)

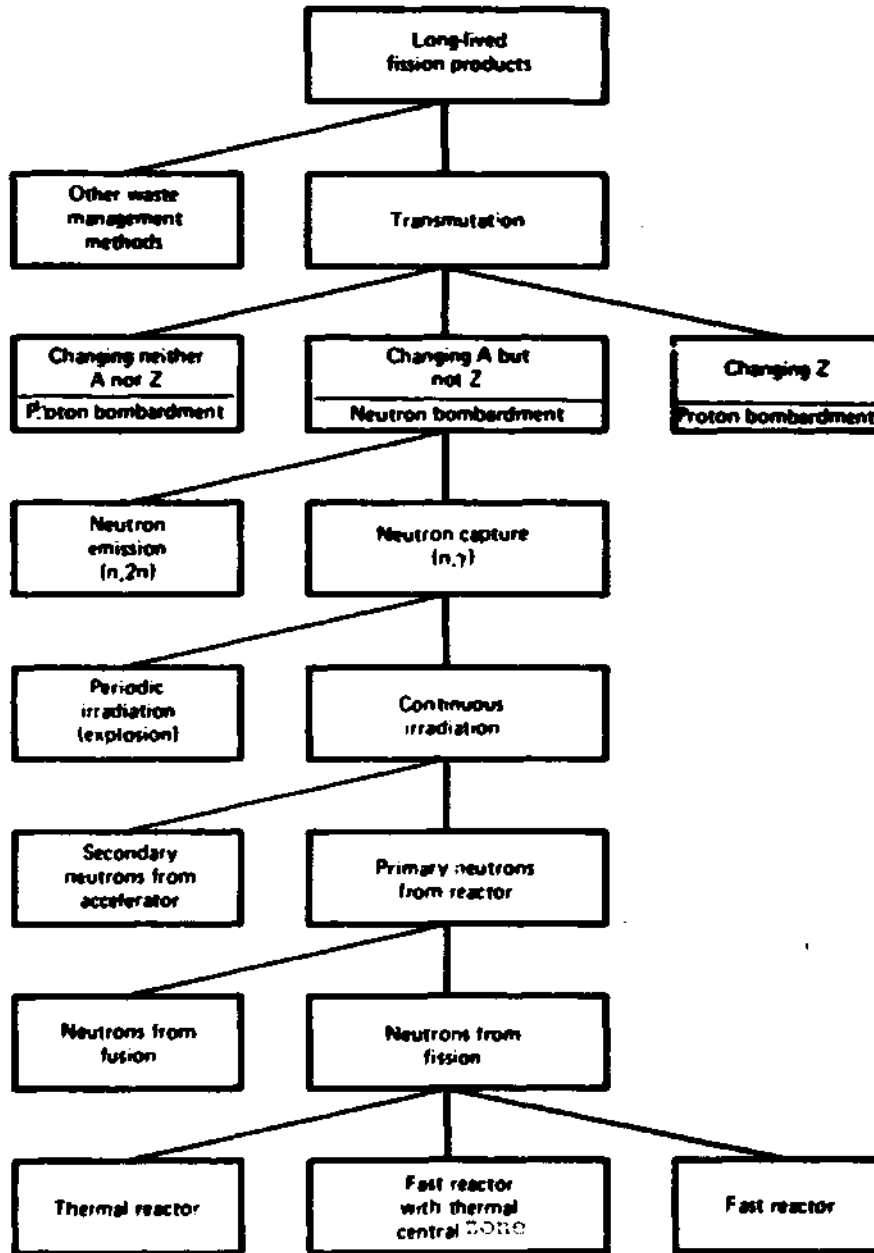

WITE DAPNE

Table 4.1 Transmutation possibilities for different devices

Machine	Flux/ Energy	Reactions, and remarks of authors of original reports.
Accelerator of medium and high energy protons	Protons 100 MeV	Reaction p,xn) not promising. Ruled out on basis of energy balace criteria.
	Protons 1.10 GeV with Cs-137 as target and/or thermalised flux of neutrons	Spalation (p,xn) and (n,2n) (n, γ) secondary neutron flux Not feasible within limits of current technology. The capital cost is prohibitive. (see table 4.2)
Fusion (thermonuclear) reactor in all cases with wall	Fast flux of 14 MeV neutrons from (D-T) $\phi =$ $5 \times 10^{14} \text{ n cm}^{-2} \text{ s}^{-1}$	Neutron reactions (n,2n) and (n, γ). Fast Flux of $5 \times 10^{15} \text{ n cm}^{-2} \text{ s}^{-1}$
	Thermalised flux in beryllium trap	Practically only (n, γ) Thermal flux $6.7 \times 10^{15} \text{ n cm}^{-2} \text{ s}^{-1}$ Attractive transmutation rate has not been demonstrated but possible to transmutate all Cs-137 and Sr-90 created by fission reactors
Nuclear	Fissile explosive or thermonuclear explosive	Technically not feasible. No. of explosions per year very high. Appr. 3900 per year each of 100 kton. (For USA in year 2000 Cs-137 and Sr-90) Probably not acceptable to public!
Fission reactor		(see Fig. 4.2)

Fig. 4.2 FISSION PRODUCTS

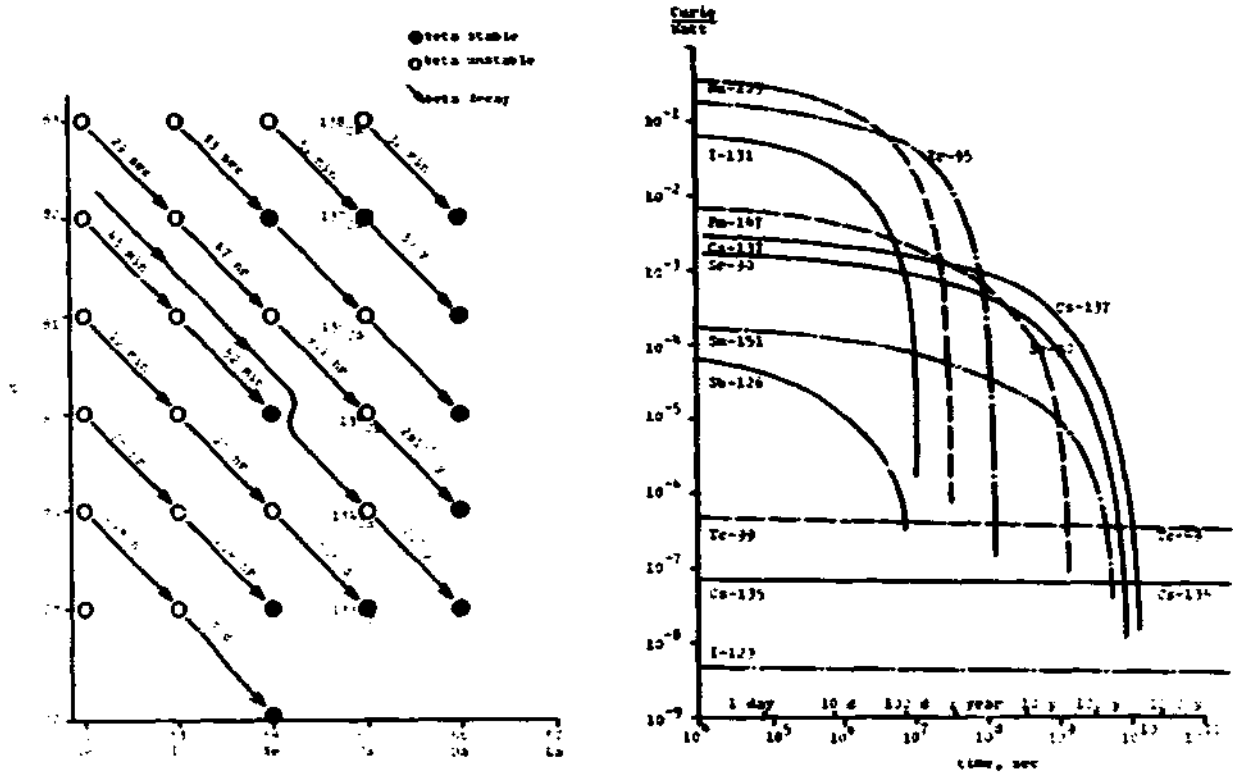


Fig. 4.3 FISSION PRODUCTS

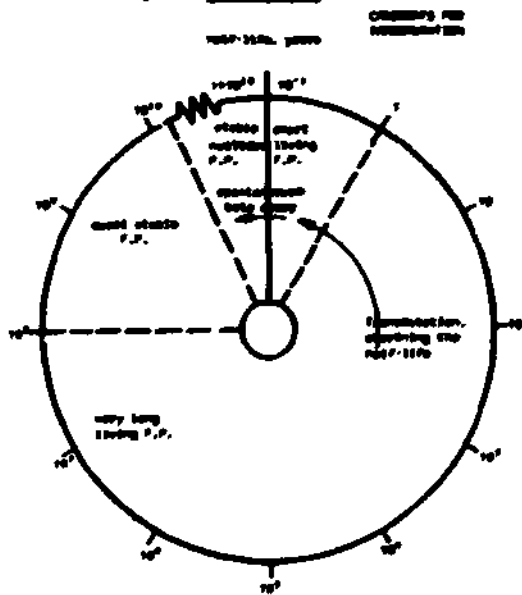


Table 2 Possibility for transmutation of F.P. - particularly Cs-137 and Sr-90 in a fission reactor according to BNWL - 1900

	Reactor	Reference	Flux	Remarks
Thermal	power reactor	Steinberg Wotzak Manowitz, 1964		The authors use a wrong value: Kr-85 with large $\sigma = 15$ barns instead of $\sigma = 1.7$ barns. Isotopic separation of Kr-isotope
			3×10^{13} thermal	Only I-129 can be transmuted.
	high flux (trap)	Steinberg, 1954	10^{16} in the trap smaller in the presence of the F.P. target.	An equal or greater no. of F.P. would be formed in the fission process per transmutation event
	high flux (trap)	Claiborne, 1972	2×10^{15} thermal	This reactor does not meet the criteria of overall waste balance and of total transmutation rate
Fast	liquid metal fast breeder	Claiborne, 1972	1×10^{15} fast	Neutron excess 0.15 - 0.3 at the expense of being no longer a viable breeder of fissile material. Also this flux does not allow the attainment of a sufficiently high transmutation rate and is, therefore, not a feasible concept.
Fast with thermal	liquid fuel fast reactor with thermal column.		this paper	

- how could such a high flux reactor with circulating liquid fuel and a thermal column operate as a "burner" for some F.P. (Cs-137, Sr-90 etc.) transmutations? (Fig. 4.3)
- is such a system feasible?

Comment

In BNWL-1900 it was noted that the calculation (in a moderating blanket of the CRT) represents a more realistic blanket configuration with a neutron wall loading of 10 MW/m² (This is still a very optimistic value. H.T.).

In this case the following data have been obtained for a thermalised neutron flux from a CRT with a 10 MW/m² wall loading. (Tab. 4.3)

Table 4.3

For 3% fraction	ϕ thermal (n.cm ⁻² s ⁻¹)	$\phi \cdot \sigma$ (n, γ)	$\phi \cdot \sigma$ (n,2n)	effective $t_{1/2}$ effective
~291 kg Cs/yr	6.71×10^{15}	$\sigma_{(n,\gamma)} = 0.117$ barn 7.91×10^{-10}	$\sigma_{(n+2n)} = 0.10$ barn 7.0×10^{-10}	$\lambda = 22.2 \times 10^{-1} \text{s}^{-1}$ 9.9 years

The conclusions of this study are that useful quantities of Cs-137 could be transmuted under the projected CRT blanket loading conditions. The reduction in Cs-137 "toxicity" is still expected to be at most a factor 3 down. In addition a study of the build-up of fission product nuclei in order to establish the requirements of periodic chemical processing and associated costs has not been carried out.

Fig. 4.2 Apparatus for experimental for
 Figure 4.2: Apparatus for experimental for


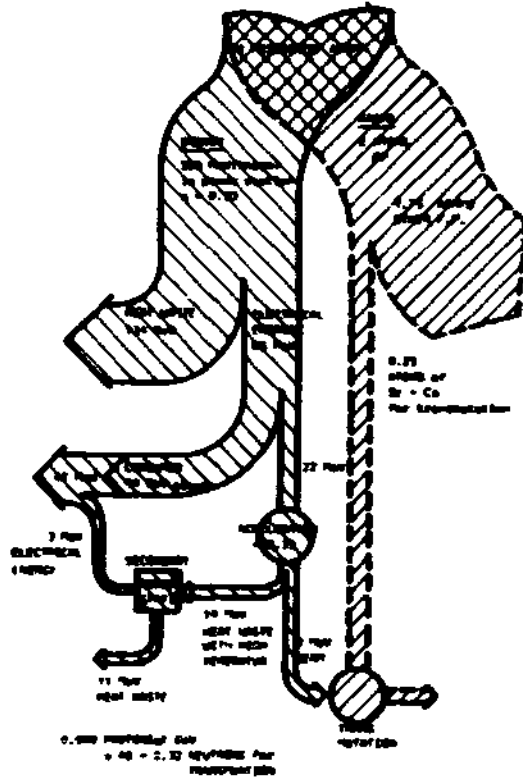


Fig. 4.6 Water system

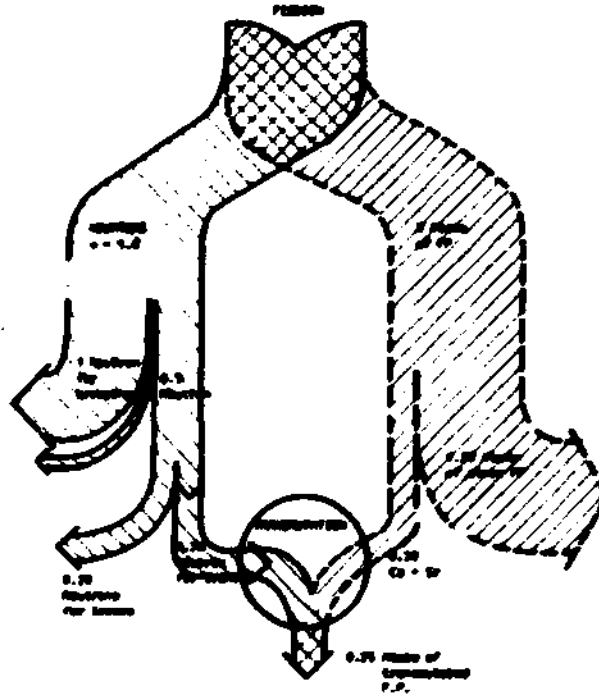

Comment

H.W. Lefevre (appendix to BNWL-1900) makes an interesting comment on the study of the transmutation of Cs-137 and Sr-90 in CTR: "Everyone knows that a CTR will be "clean". Don't spoil that illusion. I think that I would worry some about a CTR loaded with 50 kg of Cs-137".

4.1.2 Why some opinions concerning transmutations in a fission reactor are rather pessimistic

A recent and most intensive study of the use of a fission reactor for the transmutation of fission products has been published by Claiborne (1972). He writes:

"The problem fission products cannot be eliminated by any system of fission power reactors operating in either a stagnant or expanding nuclear power economy since the production rate exceeds the elimination rate by burnout and decay. Only at equilibrium will the production and removal rates be equal, a condition that is never attained in power reactors. Equilibrium can be obtained, however, for a system that includes the stockpile of fission products as part of the system inventory since the stockpile will grow until its decay rate equals the net production rate of the system. For the projected nuclear power economy, however, this will require a very large stockpile with its associated potential for release of large quantities of hazardous radio-isotopes to the environment. It is this stockpile that must be greatly reduced or eliminated from the biosphere. A method suggested by Steinberg et al. is transmutation in "burner reactors", which are designed to maximize neutron absorption in separated fission products charged to a reactor. If sufficient numbers of these burners are used, the fission products inventory of nuclear power system can then reach equilibrium and be maintained at an irreducible minimum, which is the quantity contained in the reactors, the chemical processing plants, the transportation system, and in some industrial plants.

If the assumption is made that burner reactors are a desirable adjunct to a nuclear economy, what are the design requirements and limitations: it is obvious that they must maximize (with due regard to economics) the ratio of burnout of a particular fission products to its production rate in fission reactors, and the neutron flux must be high enough to cause a significant decrease in its effective half-life. Of the fission types, the breeder reactor has the most efficient neutron economy and in principle would make the most efficient burner if all or part of the fertile material can be replaced by a Sr-Cs mixture without causing chemical processing problems or too large a perturbation in the flux spectrum because of the different characteristics of these fission products. The cost accounting in such a system would set the value of neutrons absorbed in the fission product feed at an accounting cost equal to the value of the fuel bred from those neutrons.

The maximum possible burnout of fission products would occur when the excess neutrons per fission that would be absorbed in a fertile material are absorbed instead in the fission product feed. The largest possible burnout ratio would then be the breeding ratio (or conversion ratio for nonbreeders) divided by the fission product yield. The estimated breeding ratio for the Molten Salt Breeder Reactor (MSBR), a thermal breeder, is 1.26 and for the Liquid Metal Fuelled Fast Breeder Reactor (LMFBR), 1.39. The yield of $^{137}\text{Cs} + ^{90}\text{Sr}$ is 8.12 atom/fission, but a number of other isotopes of these elements are produced which would also absorb neutrons. However, if the fission product waste is aged two years before separation of the cesium and strontium, the mixture will essentially be composed of about 80% $^{137}\text{Cs} + ^{90}\text{Sr}$ and 20% ^{135}Cs (which will capture neutrons to form ^{136}Cs that decays with a 13-day half-life consequently the maximum burnout ratio for $^{137}\text{Cs} + ^{90}\text{Sr}$ will be decreased by 20%. This leads to a maximum possible burnout ratio of about 7 for the MSBR and about 9 for the LMFBR. Unfortunately, however, the neutron fluxes in these designs are well below $10^{16}\text{n cm}^{-2}\text{s}^{-1}$. Any modifications of these designs to create high neutron fluxes will increase the neutron leakage and decrease the burnout ratios significantly". (Claiborne 1977)

Comment

It is not clear why Claiborne claimed that after 2 years ageing and separation of strontium and caesium the isotope composition will be

80% Cs-137
Sr-90
20% Cs-135

From Crouch (1973) the fission products of U-235 have the following composition (2 years ageing) (in at % per fissioned nucleus). (see Table 4.4)

Sr-98	(stable)	3.63	
Sr-90	(28 years)	4.39	
Cs-133	(stable)	6.57	
Cs-134	(2 years)	3.5	(7.09 0.5 from independent yield)
Cs-135		6.26	
Cs-137		<u>5.99</u>	
Subtotal		<u>30.34</u>	

The realistic data are unfortunately more than twice those cited by Claiborne.

The same negative opinions concerning the use of Fission Reactors for F.P. - transmutation are given by the following authors:

- A.S. Kubo (BNWL - 1900):
"Fission products are not conducive to nuclear transformation as a general solution to long term waste management".
- BNWL - 1900, itself:
"In summary it is improbable that transmutation of fission products in fission reactors could meet any of the technical feasibility requirements for the production of stable daughters".
- Claiborne (1972):
"Developing special burner reactors with the required neutron flux of the order of $10^{17} \text{ n cm}^{-2} \text{ s}^{-1}$ is beyond the limits of current technology".

4.1.3 Which fission products are suitable candidates for transmutation and in what quantities?

A simplified breakdown of neutrons and fission products produced by fission of 1 fissile plutonium atom is given in Fig. 4.4

From this it must be clear that only a very limited amount of fission products can be irradiated by neutrons of the whole system to retain a good breeding gain and doubling time - in other words a self sustaining and expanding breeding system. For further consideration it is postulated that the maximum number of transmutable nuclides equals $T = 0.3$.

The proposed system for the transmutation includes two types of reactor:

- power reactors in the form of fast breeder reactors with a total power of three to four times that of:
- a high flux burner reactor.

The crucial F.P. nuclides are characterised in table 4.4 together with others. The data available now makes it possible to estimate the number of candidates for transmutation in our breeder/burner system, using the following criteria

- the total amount of all nuclides to be transmuted cannot be greater than the estimated value of $T = 0.30$, that is 30 atoms of F.P. nuclides for each 100 fissioned nuclides.
- the order of priority taken from this table is given as $Cs > Sr > I > Te$
- in the first instance no isotopic separation process is postulated.

Table 4.4 shows the F.P. nuclides selected for transmutation.

Table 4.4 The priorities for the transmutation of fissioned products

Selected	Yield for fission of 100 atoms of Pu-239	Atom/100 atom Pu-239 Subtotal	Assuming isotopic separation atoms/100 atoms Pu-239
Cs-133 (stable) Cs-135 Cs-137	6.91 7.54 } 21.140 6.69	6.91 14.450 21.140	0.14 7.54 } 14.37 6.69
Sr-90 Sr-88 (stable) (2% isotopic separation efficiency)	2.18 1.44 × 0.02 = 0.029 } 2.209	23.32 23.349	2.18 0.029 } 2.209
I-129 I-127 (stable)	1.17 0.38 } 1.55	24.519 24.899	1.17 0.01 } 1.18
Tc-99	5.81 5.81	30.709	5.81 5.81
Kr-83 (stable) Kr-84 (stable) Kr-85 Kr-86 (stable)	0.36 0.56 } 2.474 0.672 0.882	33.183	0.67 0.04 } 0.71
Total		33.183	24.26

4.1.4 In what way could a burner reactor be coupled to a system of breeders?

The aim of the calculations used here is to show

- that given a system containing some breeding power reactors with a breeding gain of G^B
- the fission products from all of these reactors can be transmuted in the high flux burner reactor, which includes of course the fission product transmutation for the burner reactor itself.

The calculation of the ratio of breeder power to burner power is as shown here

Transmutation rate (atoms s^{-1}),	T
Yield of fission products (atoms/fission),	Y
Effectiveness of transmutation device	ϵ

$$T = \epsilon^{-1} (Y(^{90}\text{Sr}) + Y(^{137}\text{Cs}) + Y(\text{other F.P.}))$$
$$Y(^{90}\text{Sr}) = 0.041; \quad Y(^{137}\text{Cs}) = 0.064$$

Breeding gain for the total system without transmutation
 $G^B = 0.375$ (arbitrary)

Breeding gain for the total system with transmutation G^T
Ratio of fission to total capture: $\alpha = 0.24$ (arbitrary)

$$G = G^B - T/(1+\alpha)$$

Taking a numerical example with the same values arbitrarily chosen (including also another fission product with a yield of 0.1)

$$T = 0.5^{-1} (0.041 + 0.064 + 0.1) = 0.40$$

$$G^T = 0.375 - \frac{0.40}{1+0.24} = 0.05$$

which is sufficient for a power system having a slowly increasing capacity with a doubling time of 100 yr. This corresponds to the near steady state case.

To determine X, the number of power reactors

$$X \cdot G^B - 1 = (X+1) G^T$$
$$X = \frac{G^T + 1}{G^B - G^T} = \frac{0.05 + 1}{0.375 - 0.05} = 3.23$$

The correspondence ratio of the power of the breeder reactors and the burner reactor in this case equals

$$X = \frac{30-7}{7} = 3.3$$

This means for example for 8 power reactors each of 3 GW(th) (i.e. a system total of 30 GW(th) can deal with the transmutation of the fission products chosen here. The electrical output assuming an efficiency of 40% is $(3 \times 8 + 1 \times 7) \times 0.40 = 12$ GW(e) (Fig. 4.5).

4.1.5 Is the rate of transmutation sufficient?

It is clear that the rate of radioactive nuclide removal in a field of particles is given by

$$\lambda_{\text{eff}} = \lambda_{\text{decay}} + \lambda_{\text{transmutation}} = \frac{\ln 2}{t_{1/2(\text{eff})}}$$

where

λ_{decay} = constant of radioactive decay (s^{-1})

$\lambda_{\text{trans}} = \sigma_{\text{trans}} \cdot \phi$


σ = cross section (cm^2) for a given reaction

ϕ = flux of the reacting particles ($particles\ cm^{-2}s^{-1}$)

this value of λ_{eff} will be used later for the calculations of the neutron flux required to permit the transmutation rate to match.

Fig. 4.5 Scheme of the proposed breeding power system with "self-cleaning". (For the sake of simplicity, only the routes of the fission products ^{90}Sr and ^{137}Cs are shown).

8 Power Reactors, each GW (thermal) total ~ 24 GW (thermal)

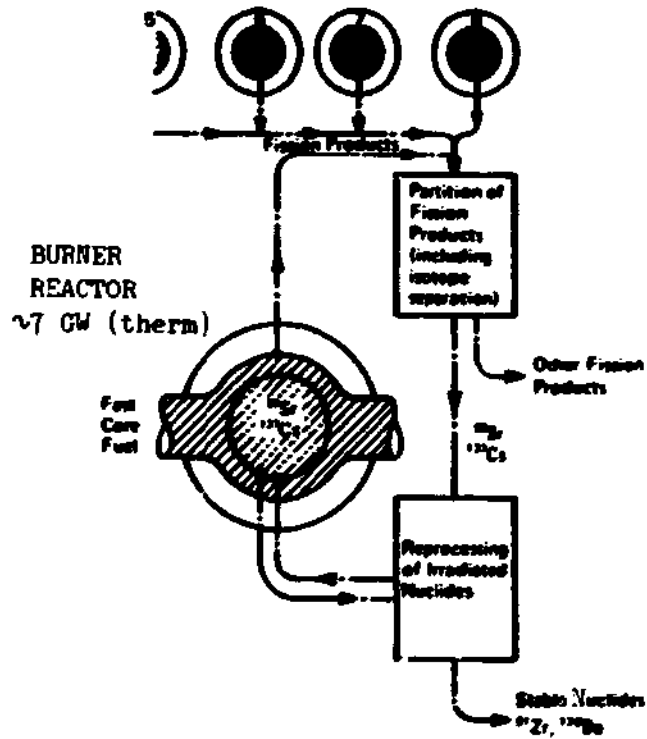

Let us assume that the energy production is based on a set of n burners and nX breeders. At a time t_n (see Fig. 4.5) when it is decided to stop the use of fission energy production in favour of other sources the total amount of a selected fission product present is

$$(1) \quad N(t_n) = (X+1) n \frac{k}{\lambda_{\text{eff}}}$$

with $K = Y \cdot P/E$

Y = yield of the selected F.P.

P = power per burner (or breeder) (Watt)

E = energy per fission (Joule)

This amount of F.P. is located only in the burners, therefore each burner can receive

$$(X+1) \frac{k}{\lambda_{\text{eff}}}$$

although then any production should only represent

$$\frac{k}{\lambda_{\text{eff}}}$$

in the steady state.

At time t_n the nX breeders are shut down and only n burners are in operation. Later on (time t_{n-1}) the nuclide removal is such that a re-arrangement is possible and one burner can be stopped, its F.P. contents will be loaded in the remaining burners etc. At the beginning of each time step t_p the p burners which are still working contain the maximum possible amount of F.P.

$$(X+1) \frac{k}{\lambda_{eff}}$$

$$(2) \frac{N(t_n)}{n} = \frac{N(t_{n-1})}{n-1} = \frac{N(t_p)}{p} = \frac{N(t_{p-1})}{p-1} = \frac{N(t_2)}{2} = \frac{N(t_1)}{1} =$$

$$= (X+1) \cdot \frac{k}{\lambda_{eff}}$$

where $N(t)$ represents the total amount of the selected F.P.

One could imagine other schemes: for example the rearrangement could be made only when 2 burners are to be shutdown. From the reactivity point of view this solution is worse than the one proposed. Coming back to the original solution, one has still to solve at each time step (t_p, t_{p-1}) the burn-up equation.

$$(3) \frac{dN}{dt} + \lambda_{eff} \cdot N = K \cdot p \quad \text{where the right hand side is the F.P. production.}$$

then the solution is

$$(4) N(t) = \frac{K \cdot p}{\lambda_{eff}} + (N(t_p) - \frac{K \cdot p}{\lambda_{eff}}) \cdot \exp(-\lambda_{eff} \cdot (t - t_p))$$

Using (2) the time needed to go from p burners to $(p-1)$ can be deduced

$$(5) \lambda_{eff} \cdot (t_{p-1} - t_p) = \sum_{p=2}^{p=n} \ln \frac{1}{1 - \frac{X+1}{p \cdot X}}$$

with a summation one obtains the time t_1 after which one burner only is in operation.

$$(6) \quad \lambda_{\text{eff}} (t_1 - t_n) = \sum_{p=2}^{p=n} \ln \frac{1}{1 - \frac{X+1}{p \cdot X}}$$

A more direct evaluation can be obtained if n is so large that the number of operating burners changes continuously with time ($p = n(t)$) then by a single elimination of p between (2) and (3) one gets

$$\frac{dN}{dt} + \lambda_{\text{eff}} N = \frac{N \lambda_{\text{eff}}}{X+1} \quad \text{or}$$

$$(4') \quad N(t) = N(t_n) \cdot \lambda_{\text{eff}} \frac{X}{X+1} (t - t_n)$$

$$(6') \quad \lambda_{\text{eff}} (t_1 - t_n) = \frac{X+1}{X} \ln \frac{N(t_n)}{N(t_1)} = \frac{X+1}{X} \ln (n)$$

The two approaches give similar results except at the end when few burners are in operation.

For times longer than t_1 only one burner is operated and the amount of F.P. would decrease from

$$(X+1) \frac{K}{\lambda_{\text{eff}}} \text{ to } \frac{K}{\lambda_{\text{eff}}}$$

We shall postulate that it has no sense to operate this last burner when the amount of F.P. is only 1.2 times longer than the asymptotic value which requires a new time interval (eq. 4 $p = 1$).

$$(7) \lambda_{\text{eff}}(t_0 - t_1) = \ln 5 \cdot X$$

The total time $t_0 - t_n$ will be the sum (6) + (7) which corresponds to the reduction factor

$$\frac{n(X+1)}{1.2}$$

Further reductions can only be obtained by natural decay ($t > t_0$).

Numerical application: with $X = 4, n = 100$ which means the economy was based before t_n on 400 breeders, the initial F.P. amount is reduced 415 times when the last burner is shutdown. Then the required time is defined by $\lambda_{\text{eff}}(t_0 - t_n) = 8.93$ (8.76 with the approx expression). If this time is to be less than say 60 years (2 reactor generations) then $\lambda_{\text{eff}} = 4.7 \times 10^{-9} \text{ s}^{-1}$ ($t_{y2} \text{ eff} = 4.7$ years).

Now the problem of the intensity of the neutron flux desired for transmutation arises. Since the most hazardous F.P. nuclides are those which apart from their high metabolic activity and high retention in living organismus also have a half life of the same order as a human life span of 60-70 years we arrive at the following list of hazardous isotopes which are the most important for transmutation.

Kr-85	$t_{y2} = 10$ years,	$\lambda_{\text{dec}} = 20.9 \times 10^{-10} \text{ s}^{-1}$
Sr-90	$t_{y2} = 28.2$ years,	$\lambda_{\text{dec}} = 7.76 \times 10^{-10} \text{ s}^{-1}$
Cs-137	$t_{y2} = 30$ years,	$\lambda_{\text{dec}} = 7.32 \times 10^{-10} \text{ s}^{-1}$
desired 'half life'	$= 4.7$ years,	$\lambda_{\text{desired}} = 4.7 \times 10^{-9} \text{ s}^{-1}$
as we know $\lambda_{\text{desired}} = \lambda_{\text{decay}} + \lambda_{\text{transmutation}}$		

The most important problem arises from the fact that the two nuclides Sr-90 and Cs-137 have very small cross sections for neutron absorption in both the thermal and fast regions.

	Cross section, σ (barn = 10^{-28}cm^2)		Ratio
	thermal	fast	therm./fast
Sr-90	0.8 barns	0.0076 barns	~ 100
Cs-137	0.11 barns	0.0137 barns	~ 8

therefore to achieve $\lambda_{\text{desired}} = 4.7 \times 10^{-9} \text{s}^{-1}$ the necessary fluxes should be:
fast flux for transmutation of

$$\text{Cs-137: } \phi_{\text{fast}} = \frac{\lambda_{\text{desired}} - \lambda_{\text{decay}}}{\sigma (\text{Cs-137 fast})} = \frac{4 \times 10^{-9}}{\sim 0.01 \times 10^{-28}}$$

$$\phi_{\text{fast}} \sim 4.0 \times 10^{17} (\text{n cm}^{-2} \text{s}^{-1})$$

thermal flux for transmutation of

$$\text{Cs-137: } \phi_{\text{th}} = \frac{4 \times 10^{-9}}{0.11 \times 10^{-28}} = 3.2 \times 10^{16} (\text{n cm}^{-2} \text{s}^{-1})$$

thermal flux for transmutation of


$$\text{Sr-90: } \phi_{\text{th}} = \frac{4.0 \times 10^{-9}}{0.9 \times 10^{-28}} = 5.0 \times 10^{15} (\text{n cm}^{-2} \text{s}^{-1})$$

(see also Fig. 4.7).

The question then arises, in what device are such fluxes possible - a fast flux of 4×10^{17} or a thermal flux 6×10^{16} . It is interesting to point out that during the period of 60 years which provides the reduction factor of 415 (if the $\lambda_{\text{eff}} = 4.7 \times 10^{-9} \text{s}^{-1}$ can be achieved) the natural decay of Cs-137 would have reduced it only by a factor 4 which demonstrates the efficiency of the burner. Also the burning which occurs during the first period ($t - t_n$) reduces the amount of

$$\text{F.P.} \frac{\lambda_{\text{eff}}}{\lambda_{\text{decay}}} \text{ times} = 6.7 \text{ times for Cs-137}$$

Fig. 2.1 Effective half life and median time for transmission

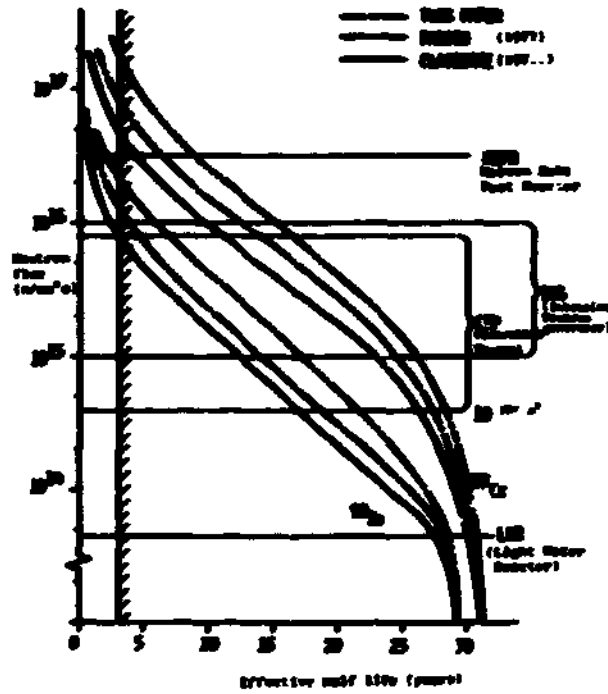

4.1.6 In what reactors are the transmutations possible?

From the point of view of this paper the most important process is the transmutation of some of these nuclides by neutrons in a fission reactor. The criteria given in chapter 2 limit the choice of system. That is

- the number of F.P. nuclei cannot be too large in relation to the number of fissioned atoms in the burner reactor (reactor for transmutation) because the latter process also produces new fission products.
- the fission reactor should be self-sustaining - that is a breeding system.
- the specific power of the reactor is proportional to the neutron flux. High neutron flux means high specific power which is controlled by the effectiveness of the core cooling.
- the specific power P and the neutron flux ϕ are coupled by the fission cross section and the concentration of fissile nuclide (N_f)

$$P = N_f \cdot \sigma_f \cdot \phi$$

For thermal neutrons σ_f is approx. 700 barns and for fast neutrons only 1.8 barns, that is 400 times smaller.

For the given total power and the same specific power the product $N_f \cdot \phi$ for the thermal reactor must be approx. 400 times smaller than for a fast reactor. Since the critical concentration of fissile nuclides in a thermal reactor can only be 10 times smaller than for a fast reactor then for a given specific power the neutron flux in a fast reactor can be about 40 times higher than that of a thermal reactor.

The cross section for thermal neutrons for the nuclides considered here is from 3 to 10 times larger than in a fast flux and this must be taken into account.

All these factors bring us to the following solution of the problems under discussion.

- the highest specific power and hence the highest neutron flux is possible if the cooling process is carried out by the fuel itself and not by a separate cooling agent only. This directs our interest towards a reactor with molten fuel in spite of the exotic nature of this solution.
- the high flux reactor must be a fast reactor (small for fast fission)

- because $\sigma_{th} > \sigma_{fast}$ the thermalisation of the high flux in a internal thermal zone is postulated, then it is possible that

$$\phi_{\text{zone therm.}} > \phi_{\text{core fast}}$$

- the first approximation is made for an isotopically pure radio-nuclide e.g. Cs-137 without Cs-133 (stable) and Cs-135 and also Sr-90 without Sr-88 (stable).

The discussion then results in:

- transmutation of Cs-137 (and some other nuclides) in a thermalised central trap of high flux neutrons:

$$\phi_{\text{therm}} = 5 \times 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$$

- production of a high flux of fast neutrons $5 \times 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$ and the high specific power of 15 kW cm^{-3} is achieved by means of liquid fuel circulating through an external cooler.
- transmutation of other selected fission products in an external thermalised zone with a thermal flux of 5×10^{15} or $1 \times 10^{15} \text{ n cm}^{-2} \text{ s}^{-1}$.
- coupling of one burner - high flux fast burner reactor with a system of 'normal' power breeder reactors.

4.1.7 What are the limitations of a solid fuelled reactor?

Can the desired specific power of 15 kW cm^{-3} be achieved in a solid fuel reactor? These are the self-evident limits in this case.

- the rate of burning of fissile nuclides is limited due to depletion of fissile or an increase of F.P. nuclides
- the heat transfer limitation of fuel/clad to coolant
- the temperature and temperature gradients in the fuel and cladding (melting, mechanical properties)

- the boiling of the coolant
- the limitation of coolant velocity, pumping power, stability.

Now we discuss these limitations in more detail

- the dwell time in a solid fuelled reactor in core for the fissile nuclide must not be too short.

$$t_{\text{dwell}} = \frac{\text{concentration of fissile nuclide} \cdot \text{maximum burn-up}}{\text{fission rate}}$$

We could write:

$$t_{\text{dwell}} = \frac{N \cdot b}{R}$$

where N = concentration of fissile nuclide

$$N = \frac{R \cdot f}{\sigma_f \cdot \phi} \text{ and } f = 3.1 \times 10^{11} \text{ fissions/joule}$$

b = maximal burn-up

P = power (watts)

R = fission rate (fission s^{-1})

$R = P \cdot f$

from this:

$$t_{\text{dwell}} = \frac{P \cdot f \cdot b}{\sigma_f \cdot \phi \cdot P \cdot f} = \frac{b}{\sigma_f \cdot \phi}$$

$b = 0.03$ (corresponds to 30.000 MWd/t)

$\sigma_{\text{fiss}}^{\text{ther}} = 700 \times 10^{-24} \text{ cm}^2$

$\phi = 5 \times 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$

$t_{\text{dwell}} = 850 \text{ s} = 14.3 \text{ minutes}$

but also for $b = 0.10$ we achieve $t_{\text{dwell}} = 47.6 \text{ minutes}$

For a fast reactor (some arbitrary values)

$$\begin{aligned} b &= 0.10 \\ \sigma_{\text{fiss}}^{\text{fast}} &= 1.8 \times 10^{-24} \text{ cm}^2 \\ \phi &= 5 \times 10^{16} \text{ n cm}^{-2}\text{s}^{-1} \\ t_{\text{dwell}} &= 1.1 \times 10^6 \text{ s} = 12.9 \text{ days} \end{aligned}$$

Conclusion:

- the dwell time in a thermal reactor is prohibitively short,
- in a fast reactor it is more reasonable but still very short, especially in the case of a solid fuel reactor
- the limitation of specific power by heat transfer is as follows: Specific power, P_{spec} , in a "good" 3 GW_{th} power reactor and with the appropriate flux taken from literature is

$$\begin{aligned} \text{thermal } P_{\text{spec}} &= 0.05 \text{ kW/cm}^3; \phi_{\text{th}} = 5 \times 10^{15} \text{ n cm}^{-2}\text{s}^{-1} \\ \text{fast } P_{\text{spec}} &= 1 \text{ kW/cm}^3; \phi_{\text{fast}} = 5 \times 10^{15} \text{ n cm}^{-2}\text{s}^{-1} \end{aligned}$$

In a high flux reactor: (see also Fig. 6 1.8)


$$\begin{aligned} \text{thermal: } P_{\text{spec}} &= 2.0 \text{ kW/cm}^3; \phi_{\text{th}} = 3 \times 10^{15} \text{ n cm}^{-2}\text{s}^{-1} \\ P_{\text{spec}} &= 1.5 \text{ kW/cm}^3; \phi_{\text{th}} = 3 \times 10^{16} \text{ n cm}^{-2}\text{s}^{-1} \\ \text{fast: } P_{\text{spec}} &= 1.0 \text{ kW/cm}^3; \phi_{\text{fast}} = 1.5 \times 10^{16} \text{ n cm}^{-2}\text{s}^{-1} \end{aligned}$$

With the same geometry the very high flux reactor desired here would have the following flux for Cs-137 transmutation:

$$\begin{aligned} \text{for } \phi_{\text{th}} &= 5.0 \times 10^{16}, \text{ the specific power } P_{\text{th}} = 22.5 \text{ kW/cm}^3 \\ \text{for } \phi_{\text{fast}} &= 4.0 \times 10^{17}, \text{ the specific power } P_{\text{fast}} = 20 \text{ kW/cm}^3 \end{aligned}$$

For a solid fuel we postulate the following "unit-cell"

	Dimension	Volume	Cross-section area	Surface-area
Cell:	0.9x0.9x1.0 cm	0.81 cm ³	0.91 cm ²	3.60 cm ²
Fuel:	= 0.60 cm	0.283 cm ³	0.283 cm ²	1.885 cm ²
Cladding:	diam = 0.63 cm			
	wall: s = 0.03 cm			
	diam = 0.60 cm	0.568x10 ⁻² cm ³	0.568x10 ⁻² cm ²	1.904 cm ²
Coolant:		0.521 cm ³	0.521 cm ²	

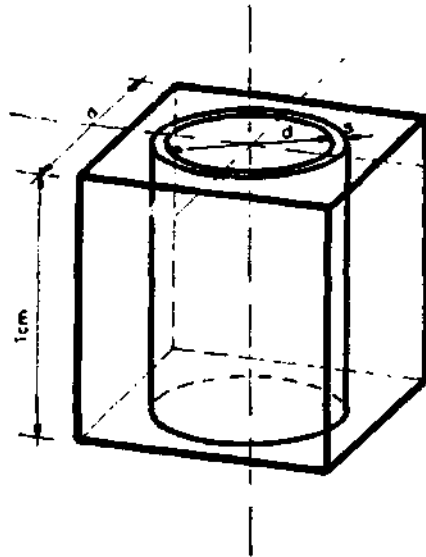

In this specified cell of a "desired" high-flux-reactor, we would achieve a heat-flux, per unit fuel element surface area: (for both types of reactors, thermal and fast)

$$H_{fs} = \frac{21 \text{ kW/cm}^3 \cdot 0.81 \text{ cm}^3}{1.885 \text{ cm}^2} = 9 \text{ kW cm}^{-2}$$

Using now a simplified model for the first guess of the temperature gradient we can say: the amount of heat generated in the fuel must be the same as that leaving the surface of the cladding material.

$$\Delta T_{\text{clad}} = H_{fs} \cdot \frac{s}{\lambda}$$

Where s = wall thickness and λ heat conductivity ($\text{W}\cdot\text{cm}^{-1}\cdot\text{K}^{-1}$) an optimistic value for stainless steel is $\lambda = 0.4 \text{ W}\cdot\text{cm}^{-1}\cdot\text{K}^{-1}$.

$$\Delta T_{\text{clad}} = 9000 \cdot \frac{0.03}{0.4} = 675^{\circ}\text{C}$$

It is evident that this result is not realistic.

The solution of this problem may be the thermalisation of neutrons in a high flux fast core and the irradiation of Cs-137 in a thermal central zone.

In such a thermal central zone we postulate (and this must be based later on core calculations)

$$\phi_{\text{th}} = 1.2 \cdot \phi_{\text{fast}}$$

to reach $\phi_{\text{th}} = 6.0 \times 10^{16}$ we require $\phi_{\text{fast}} = 5.0 \times 10^{16} \text{ n cm}^{-2}\text{s}^{-1}$. For this fast flux the specific power can be assumed, if we take into account the effective increase of the fission cross section because of the influence of the thermal trap. The simplified calculation results in a specific power of 10 kW cm^{-3} .

The corresponding heat-flux is therefore reduced to

$$H_{fs} = \frac{P_{\text{spec}} \cdot V_{\text{cell}}}{A_{fs}} = 4.3 \text{ kW cm}^{-2}$$

and the temperature gradient to

$$\Delta T_{\text{clad}} = 4300 \text{ (W}\cdot\text{cm}^{-2}) \frac{0.03 \text{ (cm)}}{0.4 \text{ (W}\cdot\text{cm}^{-1}\text{K}^{-1})} = 323^{\circ}\text{C}$$

This value is still rather high. A rough estimate of the thermal stress in the wall can be taken as

β = coefficient of linear expansion (K^{-1})

$$\sigma = \frac{3}{4} \cdot \beta_{th} \cdot \Delta T \cdot E; \quad E = \text{modulus of elasticity} \quad (Kp \cdot cm^{-2})$$

and the corresponding values for stainless steel (19-9 DL)

$$\sigma = \frac{3}{4} \cdot 15 \cdot 10^{-6} (K^{-1}) \cdot 323 (K) \cdot 2.5 \cdot 10^6 (Kp \cdot cm^{-2}) = 5530 Kp \cdot cm^{-2}$$

It is also evident that this result is not realistic:

The resulting thermal stress in the cladding wall coupled with the high flux is prohibitive.

Impact of the thermal flux tail in the fast neutron solid fuel core

Here, the most important problem is the local overheating by the thermal flux present at the interface of the thermal column and the solid fuel core. If, in the fast region near to the interface approx. 20% of the energy comes from the thermal neutrons, the following ratio of fluxes must be achieved:

$$\sigma_{th} \cdot \phi_{th} (\sigma_{fast} \cdot \phi_{fast}) 0.2$$

$$\sigma_{th} \frac{\sigma_{fast}}{\sigma_{th}} \cdot \phi_{fast} \cdot 0.2 \quad \frac{1.8}{700} \cdot 0.2 \cdot \phi_{fast}$$

$$\phi_{th} = 5 \cdot 10^{-4} \cdot \phi_{fast}$$

That the thermal flux must be 2000 times lower than the fast, would seem very difficult to realise.

4.1.8 The liquid-fuelled fast reactor with central thermal zone

A much better solution is using a liquid-fuel. The transfer of the heat generated is done, by pumping and cooling the liquid fuel out of core.

For a unit cell of 1 cm³, which in this case consists of fuel only, we can write the following heat-balance.

$$P_{\text{spec}} = (\rho \cdot c) \cdot w \cdot \frac{T}{l}; \quad (\rho \cdot c) = \text{heat capacity (J} \cdot \text{cm}^{-3} \cdot \text{K}^{-1})$$
$$w = \text{velocity of fuel (cm/s)}$$
$$T/l = \text{temperature increase per unit cell (K} \cdot \text{cm}^{-1})$$
$$P_{\text{spec}} = \text{specific power (W} \cdot \text{cm}^{-3})$$

If we allow in the core a temperature increase of $\Delta T/l \sim 3 \text{ deg} \cdot \text{cm}^{-1}$

$$w = \frac{21 \cdot 10^3 \text{ (W} \cdot \text{cm}^{-3})}{2.0 \text{ (J} \cdot \text{cm}^{-3} \cdot \text{K}^{-1}) \cdot 3 \text{ (K} \cdot \text{cm}^{-1})} = 35 \text{ m} \cdot \text{s}^{-1}$$

This velocity appears to be within the practical limits proposed for a fuel-velocity of 40 m.s⁻¹ for a reactor with 10 kW.cm⁻³ specific power. This point however has to be seriously investigated, as erosion due to high velocities is a problem.

For a 7000 MW(th) core with a specific power of 21 kW.cm⁻³ the fuel volume is about 0.330 m³.

The target volume, that is the volume of irradiated (transmuted) fission products e.g. Cs-137, is postulated as 1.3 m³. The diameter of a spherical core is therefore 146 cm. The temperature increase of the unit cell of fuel, in one pass through the core, equals approximately

$$T_{\text{fuel}} = 3 \text{ (deg} \cdot \text{cm}^{-1}) \cdot 146 \text{ (cm)} = 438^{\circ}\text{C}$$

and for a fuel inlet temperature of 550^oC we reach an outlet temperature of approx. 988^oC.

The idea of a liquid fuel high flux reactor has been discussed for some years. Lane (1971) for example writes about high flux fast reactors:

"As an alternative some consideration has been given at Oak Ridge to the possibility of using a molten salt reactor as a fast flux test facility. The primary virtue of this approach includes the ability to achieve very high power densities and at the same time eliminate the down time associated with refuelling the reactor. A fast spectrum molten salt reactor however requires a high fissile concentration (i.e. 300 to 500 g ^{235}U /litre) in order to get mean neutron energies in the range of 10 to 50 keV. Switching from an NaF - UF₄ salt (on which the energy range just mentioned is based) to a chloride-salt reactor would permit a higher mean energy for the same fuel concentration but would require the development of a new technology associated with the use of chlorides. Since the fast flux level is largely determined by the power density a flux of the order of 10^{16} or more corresponds to a peak power density in the fuel salt in a range of 5 to 10 MW/litre and to a power level of about 1000 MW (with). This means that there will be only 100 to 200 litres in the core; however the external volume would be about 10'000 litres".

4.2 The Neutron-physical Aspects of the High Flux Reactor

4.2.1 Introduction

The idea of destroying the beta active long lived radionuclides is based on the following:

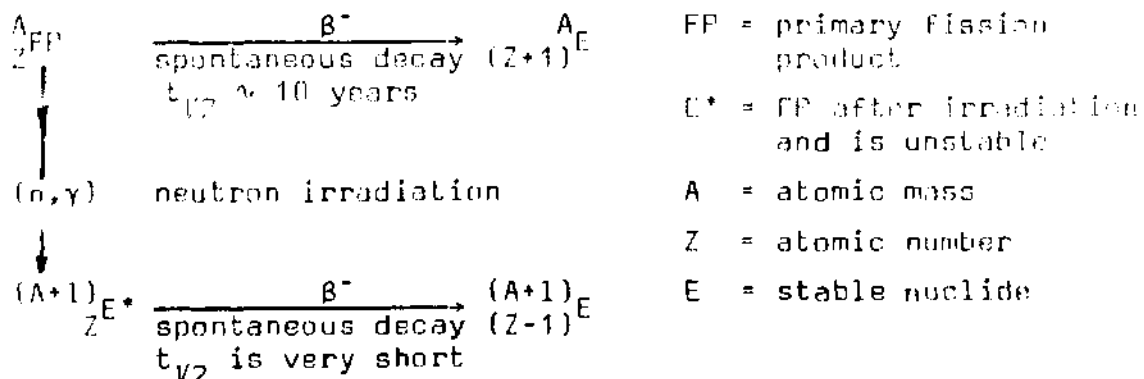


Fig. 4.10 gives some of the given transformations which may occur under a high flux. (Remark: Fig. 4.8 and 4.9 omitted)

In this system the following simple assumptions are made

- the amount of fission products come from both the fast power reactor breeders and the thermal burner.
- the fuels and materials are continually reprocessed
- the irradiated fission products are continuously (or periodically) separated in order to eliminate the daughter stable nuclides (e.g. Zr-90 and Zr-91) from the decay and burning of Sr-90
- the amounts of transmuted nuclides in the steady state (SS) irradiation are calculated by the obvious relationships for the i -th nuclide.



4.2.2 Neutronic calculations

A reference burner reactor concept is shown in Fig. 4.11. The flux trap is surrounded by a BeO beryllium oxide spectrum converter, a critical fuel thickness and an outer wall (see Table 4.5 and Table 4.6). Fig. 4.12 shows the calculated flux distribution. The total flux in the fuel is similar to that in the flux trap (Fig. 4.13)

4.2.3 Moderation requirements

To form a thermal neutron flux trap one must naturally use neutron moderating materials. As is well known, light materials can scatter neutrons past the neutron-absorbing intermediate-energy resonance region. ^1_1H is the most efficient nuclide in this respect but also exhibits appreciable thermal absorption. Deuterium ^2_1H , beryllium ^9_4Be and carbon $^{12}_6\text{C}$ are usual alternatives. Oxygen $^{16}_8\text{O}$ is rather heavy though frequently already present in a molecular combination. Other light nuclides have unacceptable nuclear or physical limitations.

Fig. 4.10 Transmutation of selected Nuclides-fission products

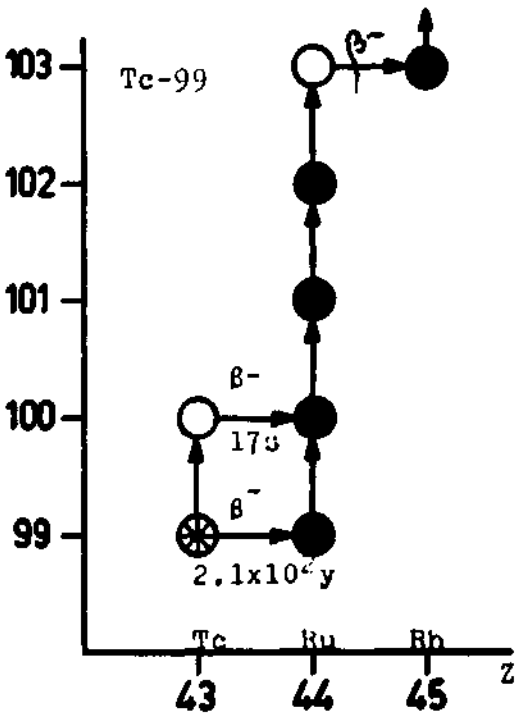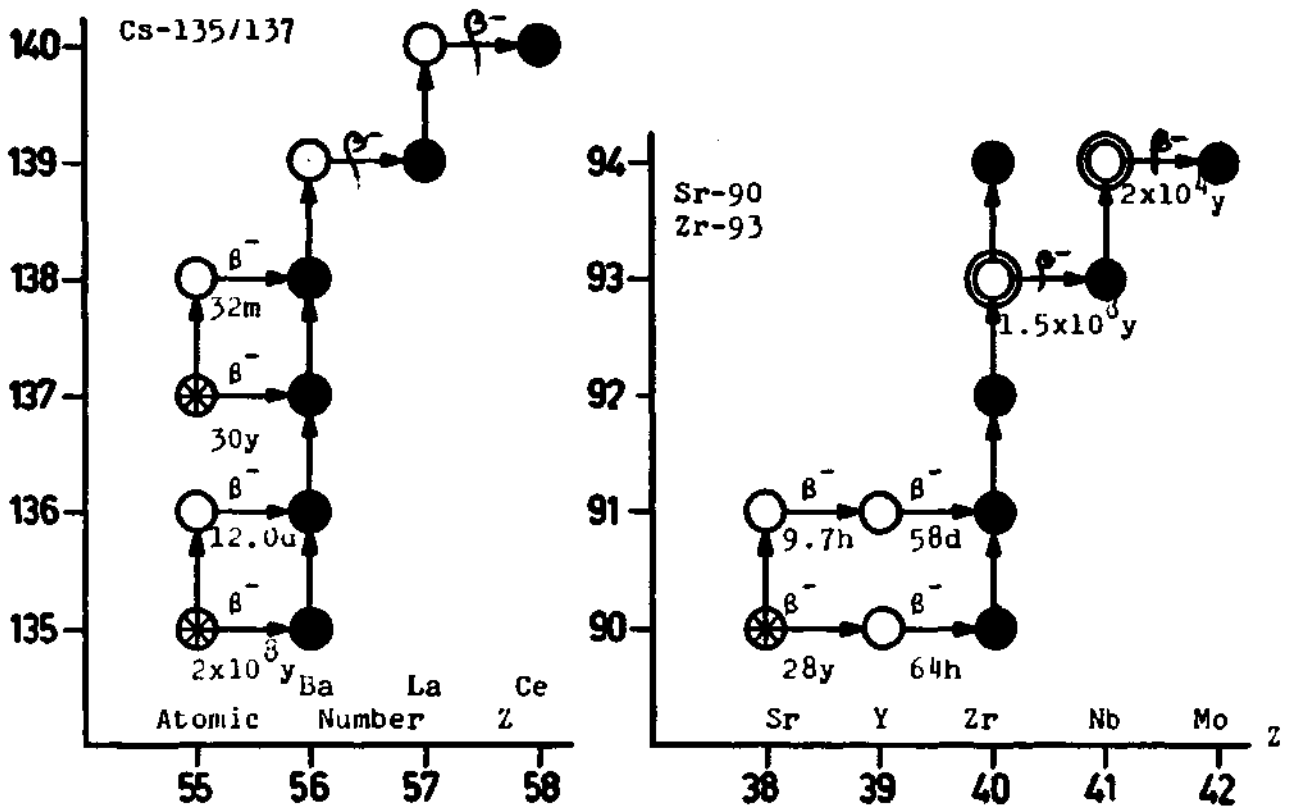

- ⊗ Long lived fission product being the object of transmutation
- Stable Nuclide
- Beta unstable, intermediate nuclide
- ⊙ Long lived nuclide
- $\xrightarrow[\text{half-life}]{\beta^-}$ spontaneous beta decay
- ↑ neutron capture (n,γ)

Table 4.5

OBJECT: HIGH FLUX BURNER REACTOR WITH THERMAL ZONE

REACTOR TYPE :
GEOMETRY: INTERNAL ZONE : THERMAL, HIGH FLUX
WALL : IRON, GRAPHIT
INTERMEDIATE ZONE: CORE, FUEL
WALL : IRON
EXTERNAL ZONE : -
WALL, REFLECTOR : IRON

POWER (GW thermal) : 7
POWER DENSITY (GW therm/m³ core): ~ 10
NEUTRON FLUX, MEAN (n/cm²s) : ~ 4 x 10¹⁶

FISSILE NUCLIDE: Pu-239
DILUTENT : NaCl
COOLING SYSTEM : out of core
BREEDING RATIO : -

PARAMETER STUDIED: Moderators in thermal zone
: Wall, thickness, beryllium, graphite
: Volume, specific power
: cooling parameters

METHOD OF NEUTRONIC: ANISN S4
CALCULATION : 23 Groups
: P₁ APP.
: GCC3 COOF
END

Fig. 4.11 GEOMETRY OF THE HIGH FLUX REACTOR

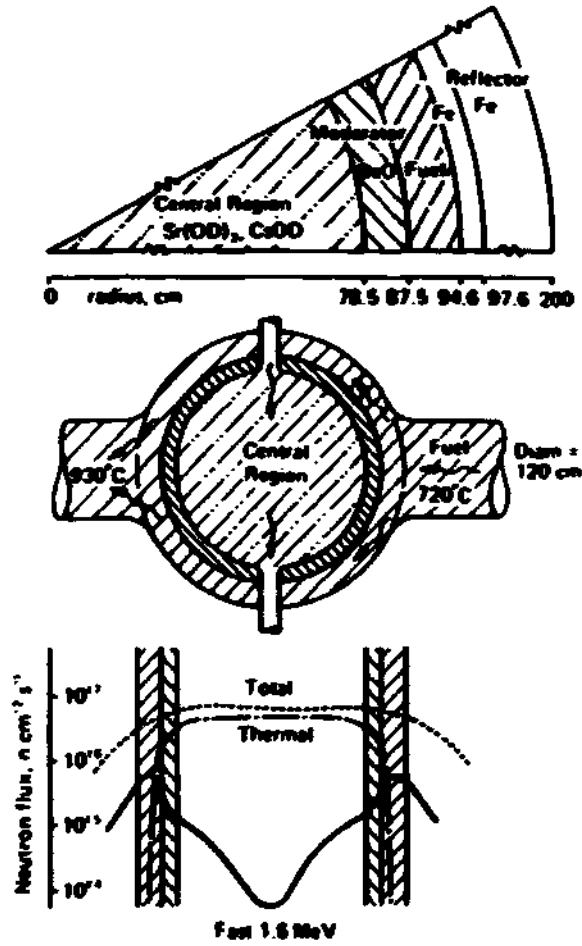


Table 4.6 Geometry and Neutronics of the High-Flux Burner Reactor

(Total power = 7 GW(th); fission products from the total system of 30 GW

Region	Radius (cm)		Components (atoms 10^{-24}cm^{-3})		Neutron Flux ($n \text{cm}^{-2} \text{s}^{-1}$) <u>total</u> thermal
	Inner	Outer			
Central for transmutation	0.0	78.5	^{137}Cs	0.0116	$\frac{3.83}{2.05} \times 10^{16}$
		Volume 2.1 m ³	^{90}Sr	0.0015	
			O	0.0145	
			O	0.0145	
			(Cesium and strontium deuterioxide)		
Wall, moderator	78.5	88.0	Be	0.060	$\frac{4.48}{1.79} \times 10^{16}$
		Volume 0.82 m ³	O	0.060	
			(Beryllia: 8 cm, graphite: 0.5 cm)		
Core (fuel)	88.0	94.6	^{239}Pu	0.0014	$\frac{4.03}{0.0156} \times 10^{16}$
		Volume 0.67 m ³	^{240}Pu	0.0004	
			^{241}Pu	0.0002	
			Na	0.012	
			Cl	0.018	
			(Plutonium, sodium chlorides: $\text{PuCl}_3 \cdot 6 \text{NaCl}$)		
Wall	94.6	97.6	Fe	0.08	$\frac{4.00 \times 10^{16}}{5 \times 10^{11}}$
Reflector	97.6	200	Fe	0.08	Boundary flux $\frac{2.4 \times 10^{13}}{10^8}$

Fig. 4.12 Neutron spectrum in the core
 Total mean flux $4.05 \cdot 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$
 Specific power 12.1 kW cm^{-3}
 Total power 7 MWth


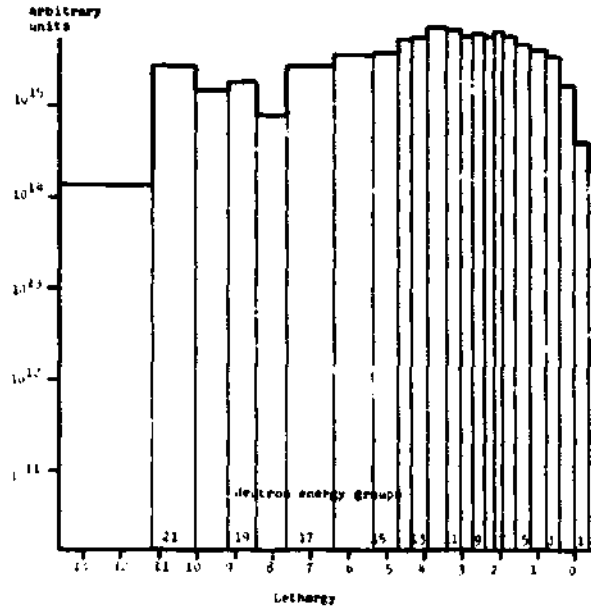


Fig. 4.13 High flux burner reactor

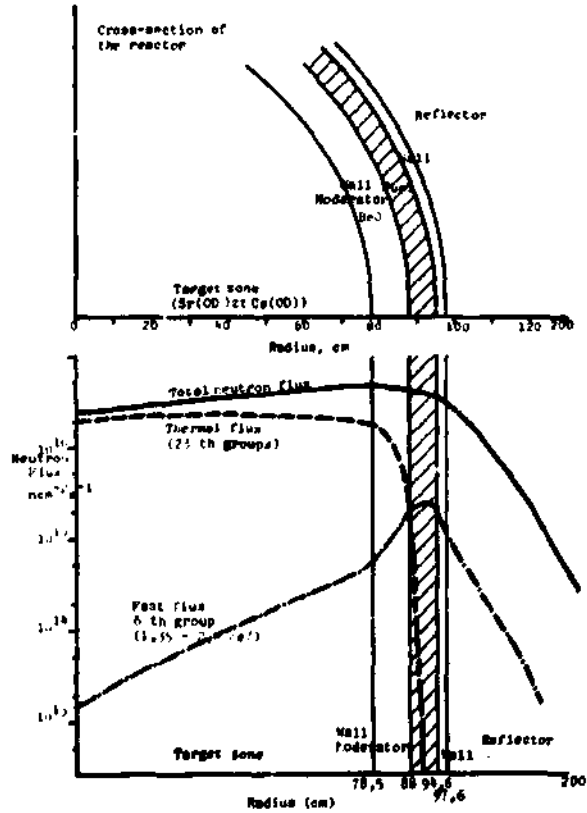

Considering chemical and physical properties, the logical materials to be used inside the flux trap are hydroxide and/or deuteride compounds of the FP. Fig. 4.14A shows that just a small proportion of H molar fraction has a large deleterious effect on the Cs-137 transmutation rate. This is due to the H absorption cross section. Therefore, CsOD and Sr(OD)₂ are preferred.

As Sr-90 and Cs-137 also have their fair share of resonances it is advantageous to thermalise the flux before reaching the flux trap region containing these targets. Therefore a spectrum converter between flux trap and fast fuel is needed. Bearing in mind the high temperatures to be obtained in this reactor and possible chemical reactions with molten salt, H₂O and D₂O are unacceptable. This leaves Be, BeO and graphite or some variant therefore for consideration. Be (and D) compounds, of course, have also to their advantage a relatively low (n,2n) threshold (1.67 MeV). Location next to a fast region can therefore produce considerable very slow neutrons in the flux trap - which is a main objective of the burner reactor. Replacement of Be by C or Mo wall material should therefore lower the FP transmutation rate, and it does. (Table 4.7 Fig 4.14B) indicates an optimum thickness of about 5 cm Be. For the sake of safety and higher melting temperature, BeO is preferred over Be.

Table 4.7 Effect on Replacing Be Converter upon the Relative FP Transmutation Rates


<u>case</u>	<u>materials</u>	<u>$\lambda_{transm.}$ (Cs-137)</u>	<u>$\lambda_{transm.}$ (Sr-90)</u>
1	Be, Be	1.0	1.0
2	C, Be	0.72	0.68
3	Be, Fe/Mo	0.84	0.82

(Note. transmutation rate in arbitrary units)

4.2.4 Influence of other parameters

The influence of plutonium concentration (Fig. 4.14C) is an important parameter of this reactor. Increasing the plutonium concentration significantly improves the transmutation rate but also increases the power density above a technically feasible level (Fig. 4.14D). See also Fig. 4.15.

Fig. 4.14 Impact of some selected parameter variations: (a) hydrogen/deuterium, (b) thickness of moderator (${}^252\text{Cf}$), (c) plutonium concentration, and (d) power density, P (kW cm^{-3})

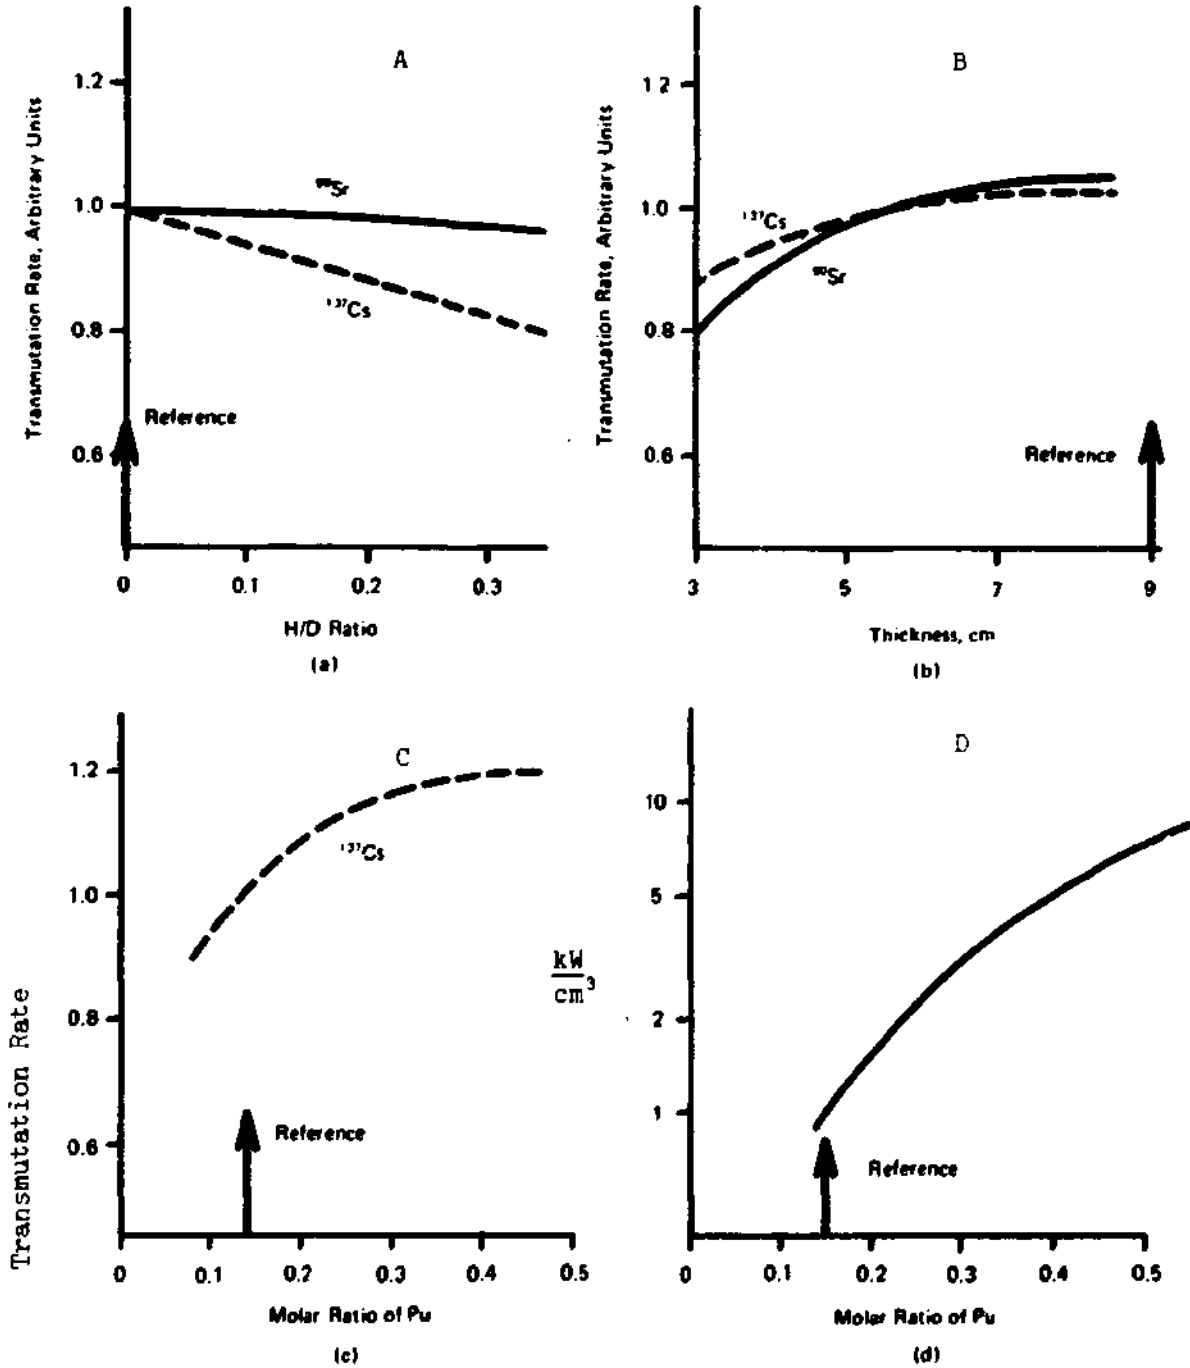

Increasing the reactor power (Fig. 4.16A) from 5 to 11 GW(th) improves the transmutation rate. However a power unit above 7 GW(th) seems to be beyond the technological limit even for the distant future. The reference case has been taken as 7 GW(th).

The use of beryllium (Fig. 4.16B and 4.16C) instead of iron in the reflector of the core improves the transmutation rate significantly. At the same time the power density increases prohibitively (Fig. 4.16D). The reference case contains iron in the reflector.

Molten fuel offers the only way of handling the very high power densities of 10 GWm^{-3} . In addition the very steep gradient of fission rate makes a molten fuel core essential since the local fission density can be one order of magnitude greater than the mean density. In a solid fuel core the high heat removal rates would not be achievable.

The use of boron to absorb the thermal neutrons results in a definite decrease in the rate of caesium transmutation (Fig. 4.17).

The large size of the thermal flux trap results in the fuel region approaching slab geometry with attendant high neutron leakage. To better economise on neutrons several possibilities may be tried

- use of an optimised reflector such as Fe, Ni, Cu or Be to minimise the critical mass
- use of the outer neutron leakage for breeding
- use of the neutron leakage for additional FP transmutation

To begin with a solid Fe reflector was assumed (Fig. 4.18).


4.3 Thermohydraulic considerations

We now examine the thermohydraulic implications (for more detail see ch. 8).

The crucial parameter here is the core power density. The given value is high but still near the present state of the art (Table 4.8).

For comparison, power densities for some high flux reactors. (Table 9)

Fig. 4.16 Effect of variation in some selected parameters: (a) power, (b) power (b) reflector, (c) power density, $P(\text{GW m}^{-3})$, and (d) fission density in fuel, F (fission cm^{-3})

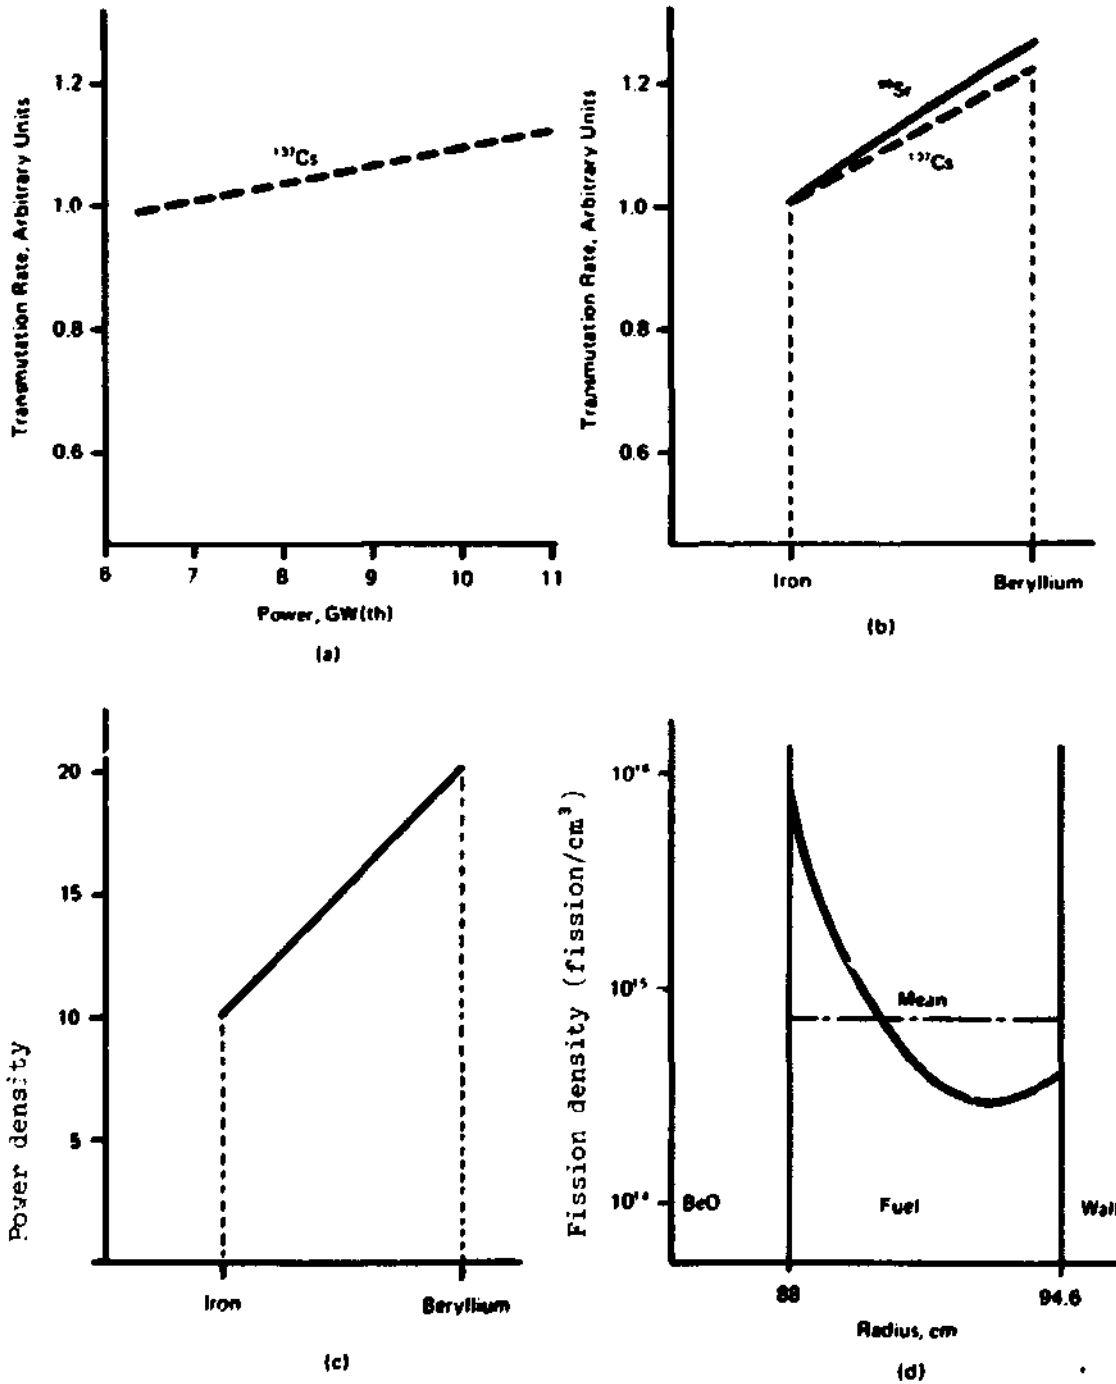

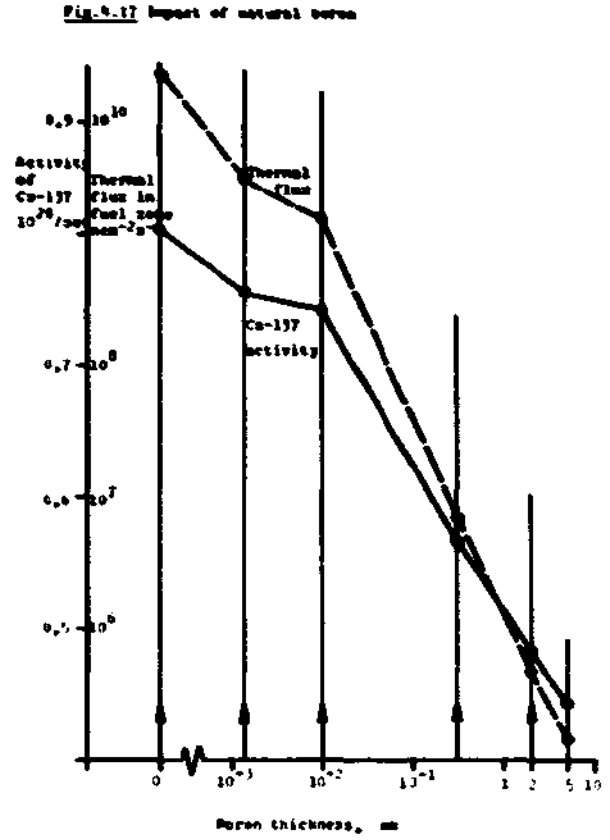
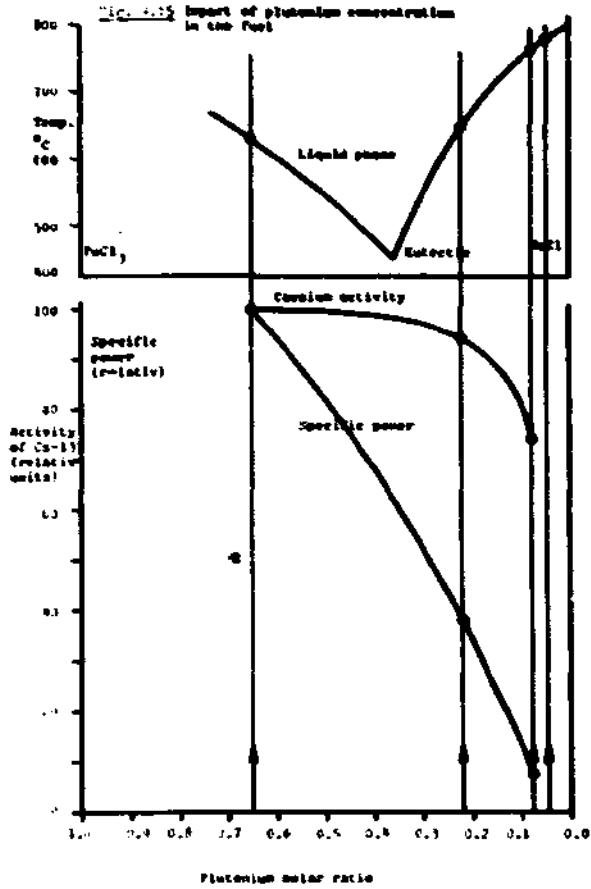


Fig. 4.18 Impact of reflector

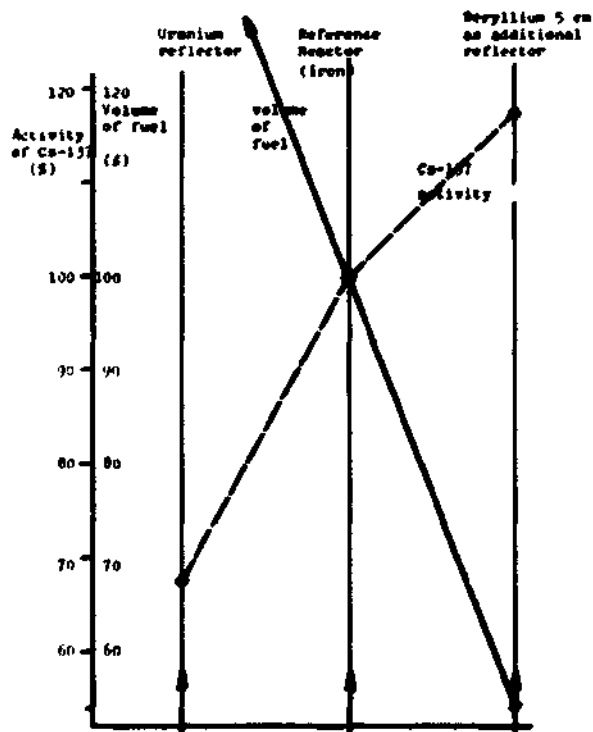


Table 4.8 Thermohydraulics of the High-Flux Burner Reactor

Parameter	Unit	Value
Total power	GW(th)	7.0
Core volume	m ³	0.69
Power density	kW cm ⁻³	10.5
Fuel density	g cm ⁻³	2.35
Heat capacity, mass	J g ⁻¹ K ⁻¹	0.83
Heat capacity, volume	J cm ⁻³ K ⁻¹	1.95
Diameter of tube inlet	cm	120
Inlet velocity	m s ⁻¹	15
Volumetric velocity	m ³ s ⁻¹	17
Heat capacity	GW s K ⁻¹	0.033
Temperature increase (outlet-inlet)	°C	210
Temperature of fuel inlet	°C	720
Temperature of fuel outlet	°C	930
Mean velocity of fuel in core	m s ⁻¹	12
Cooling	---	Out of core in heat exchanger cooled by sodium

This seems to indicate that a total specific power rating of about 1 kgPu/GW(th) may be achievable.

Table 3 Power density in high-flux reactors

	Power density GW(th)/m ³	
	in core volume	in coolant volume
Feinberg, research reactor	3-5	8-10
Melekes CM-2 (Soviet Union)	2.5	5
FFTF (USA)	1.0	2
Lane (Molten chlorides)	5-10	5-10
HFIR (USA) mean	2	4
maximum	4.38	8.5
Phenix 250 (France)	0.45	1.0
This paper	10.9	10.9

The crucial problem will be the efficiency of the external heat exchanger. In the following example some typical heat exchanger characteristics are taken to demonstrate the possibilities (calculated for 11 GW(th)).

Specific heat exchanger power (conservative data)	1 kW/cm ³
Total volume of heat exchanger for 11 GW(th)	11 m ³
Volumetric fuel ratio	0.3
Fuel volume in heat exchanger	3.3 m ³
Fuel in the core heat exchanger piping	1.0 m ³
Total fuel out of core	4.3 m ³
Fuel in core	1.0 m ³
Total fuel in system	5.3 m ³
Mean specific power of fuel in the whole system $\frac{11 \text{ GW(th)}}{5.3 \text{ m}^3}$	2.07 GW/m ³
Plutonium content of fuel	0.8 gPu/cm ³
Power rating of whole system	0.385 kgPu/MW(th)
The postulated power rating for the whole system	1 kgPu/MW(th)
For this case calculated the power rating in the breeder power reactors	1.15 kgPu/MW(th)

4.4 Some results

Parametric studies were made as variations around a reference system which assumed $P = 11 \text{ GW(th)}$ ($X = 2.9$, $K = 4.2$) and $R_{FT} = 78.5 \text{ cm}$. The flux trap is surrounded by 5 cm BeO converter, a critical fuel thickness of 6.6 cm and an outer wall. Fig. 4.19 shows the calculated flux distributions for such a burner reactor. Note that the total flux in the fuel is similar to that in the flux trap. The calculated fluxes lead to the conclusion that

$$(\text{total spectrum, flux trap}) = \sqrt{2} \cdot (E=0.0253)$$

The result indicates the relative effect of X on the ratio R of the FP transmutation rate to FP production rate for the reactor system. It can be seen that X should be kept as low as possible. Absolute results will depend on the Cs and Sr densities in the flux trap. A value of $R = 1$ was achieved for both FP nuclides at $X = 4.5$. The F.P. atom ratio there was $(\text{Cs-137}) / (\text{Sr-90}) = 7.25$.

Another important problem is the relatively high flux in the outer zone or leakage from the core.

This flux can be used for two purposes:

- 1) for transmutation of other fission products which have rather a high absorption cross section e.g.

$$\text{Tc-99} \quad \sigma^{th} = 22 \text{ barns} \quad t_{1/2}^{\beta} = 2.1 \times 10^5 \text{ years}$$

$$\text{I-129} \quad \sigma^{th} = 28 \text{ barns} \quad t_{1/2}^{\beta} = 1.7 \times 10^7 \text{ years}$$

In both cases a flux of $10^{14} - 10^{15} \text{ n cm}^{-1} \text{ s}^{-1}$ permits a rather effective transmutation rate of


$$\text{Tc-99} \quad \lambda = 7 \times 10^{-9} \text{ s}^{-1} \quad t_{1/2\text{eff}} = 3 \text{ years}$$

$$\text{I-129} \quad \lambda = 7 \times 10^{-9} \text{ s}^{-1} \quad t_{1/2\text{eff}} = 2 \text{ years}$$

To still further improve these reactions the use of a beryllium moderator in the form of a 5 cm wall in the outer region of the core has been calculated. This gave an improvement in the transmutation rate of Cs-137 in the inner target region but also a very significant increase of specific power due to the scattering of the neutron flux in the fuel region.

The possibilities for transmutation of these two long lived fission products will be discussed further elsewhere.

Fig. 4.19 Fission density in the fuel zone

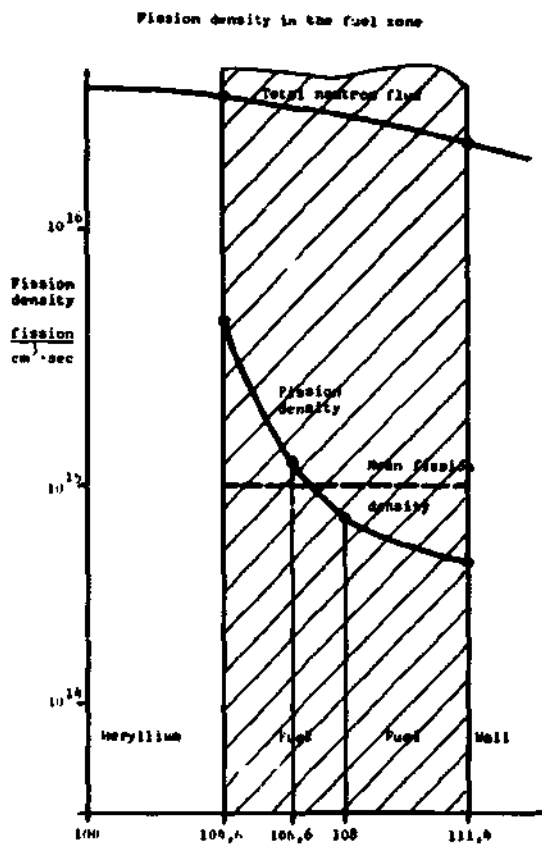

Remark: Fig. 4.20 omitted

The neutron flux outside the core may also be used for breeding in a uranium blanket. The breeding ratio may be higher than 1 but the decrease of the transmutation ratio is critical and seems to be too low for a burner reactor.

Nevertheless it could be useful to check these possibilities in more detail using some of the available neutrons for breeding in an external blanket region.

Table 4.9 summarises the data for the reference case. It can be shown that the transmutation rates obtained are equal:

$$^{90}\text{Sr}: \quad \lambda_{\text{eff}} = \lambda_{\text{tr}} + \lambda_{\beta} = \sigma \cdot \phi + \lambda_{\beta} = 1.19 \times 10^{-8} \text{s}^{-1}$$

$$t_{\text{eff}}^{1/2} = 1.85 \text{ yr}$$

$$t_{\beta}^{1/2} / t_{\text{eff}}^{1/2} = 15$$

$$^{137}\text{Cs}: \quad \lambda_{\text{eff}} = 0.246 \times 10^{-8} \text{s}^{-1}$$

$$t_{\text{eff}}^{1/2} = 8.95 \text{ yr}$$

$$t_{\beta}^{1/2} / t_{\text{eff}}^{1/2} = 3.3$$

The results obtained are significant but rather pessimistic. To estimate the "profit" of the transmutation process, the hazard index (H) must also be taken into account. From Table 4.10 it can be seen that the total reduction in hazard from both fission products equals 13.5, which is a better indication.

4.6 Comments on hazard coefficients

It is perhaps valuable to estimate the usefulness of using the concept of hazard coefficients in fission product management. Table 4.10 gives some values for Sr-90 and Cs-137. From this it can be seen that in a steady state transmutations requiring the amount of hazardous substances is reduced by a factor ~ 15 in relation to the steady beta-decay.

Table 4.9 The Transmutation Process for Selected Fission Products

(Total power $P = 30 \times 10^9 \text{W}$ (burner reactor $7 \times 10^9 \text{W}$); fission rate in
 $= 9.3 \times 10^{20}$ fission/s.)

Property	Symbol	Unit	Data for	
			^{90}Sr	^{137}Cs
Yield of fission product ^a	Y	---	0.041	0.064
Production rate	$R_p = F \cdot Y$	atom s^{-1}	3.81×10^{19}	5.05×10^{19}
Concentration	C	atom/ 10^{24}cm^3 of target	0.0016	0.0116
Volume of target	V	cm^3	2.03×10^6	
Number of atoms	$N = V \cdot C$	atom	3.25×10^{27}	2.35×10^{28}
Decay constant	$\lambda\beta$	s^{-1}	7.86×10^{-10}	7.33×10^{-10}
Decay rate	$R = N\lambda\beta$	atom s^{-1}	2.55×10^{18}	1.72×10^{18}
Mean cross section	σ_c	10^{-24}cm^2	0.29	0.045
Total flux, mean	ϕ	$\text{n cm}^{-2} \text{s}^{-1}$	3.83×10^{16}	
Transmutation rate	$R_{tr} = N \cdot \sigma_c \cdot \phi$	atom s^{-1}	3.61×10^{19}	4.05×10^{19}
Total destruction rate	$R_d = R + R_{tr}$	atom s^{-1}	3.86×10^{19}	5.77×10^{19}
Destruction constant	$t_{eff} = \ln 2 / \lambda_{eff}$	year	1.85	8.95
Efficiency of transmutation Inventory reduction ratio	$E_{tr} = t_{eff} / t_{\beta}$	---	15	3.3
Steady-state equilibrium	$R_p \approx R$		3.8×10^{19}	5.8×10^{19}

^aFor the mean value of the yield, see Table 4.10

^bSee Fig. 4.21

Table 4.10 Hazard index for the Improved Reference Case*

Parameter	Symbol	Unit	⁹⁰ Sr	¹³⁷ Cs	R T
Maximum permissible concentration water air "mean"	H		3.7×10^{-1} 3.7×10^{-5}	14.8 2.2×10^{-1}	
Yield of fission products from ²³³ U	Y	atom/fission	0.062	0.066	
from ²³⁵ U	Y	atom/fission	0.051	0.0599	
from ²³⁹ U	Y	atom/fission	0.0218	0.0669	
Mean value for fission rate of ²³³ U: ²³⁵ U: ²³⁹ Pu 1:1:1	Y		0.041	0.064	
Hazard	H*Y	---	2.05	0.064	2.114
Efficiency of hazard reduction by transmutation	$H*Y/E_{tr}$ (Table III)	---	0.137	0.019	0.156
Mean effective hazard reduction					$\frac{2.114}{0.156}$

*The hazard coefficient (H) is defined as the amount of air and/or water needed to dilute the amount of a given nuclide present to levels proposed for the maximum permissible concentration.

Fig. 2.11 Inventory of Strontium-90 in the power
reactors and in the nuclear industry
Level of total stock: 10 tons
Half-life of Sr-90: 28.8 y


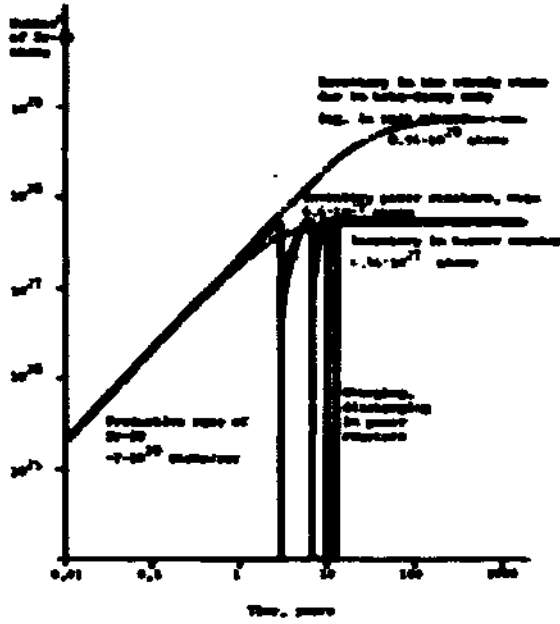


Fig. 2.12 Level of the both fission products: Cs-137 and Co-137

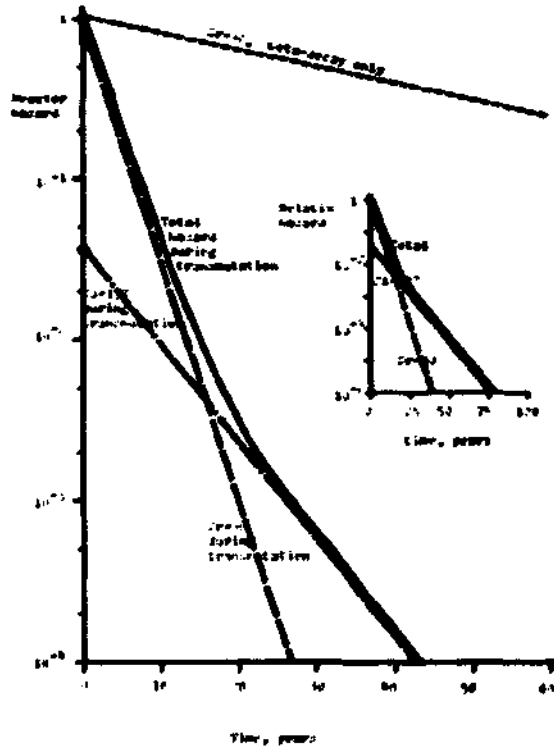

The amount of strontium-90, the most hazardous nuclide, in the high flux burner is about the same as that found in the power reactors after 3 years of operation.


However the most impressive result comes from considering the end of the fission power area. Where by compared to storage (natural decay with a combined half life of 39 years) without transmutation, the transmutation case shows that the amount of nuclides remaining will be reduced by a factor of 1000. (Fig. 4.22).

In a high flux transmutation the reduction by a factor 1000 would be achieved with 26 years in the lifetime of one reactor generation.


4.7 Secondary processes

It must be remembered that the relatively high neutron flux results in the irradiation not only of the non-desirable radioactive nuclides but also the stable fission products, including the stable components of the fuel and structural material. A very short review of these particular processes is given here.

Natural chlorine contains two stable isotopes (underlined)

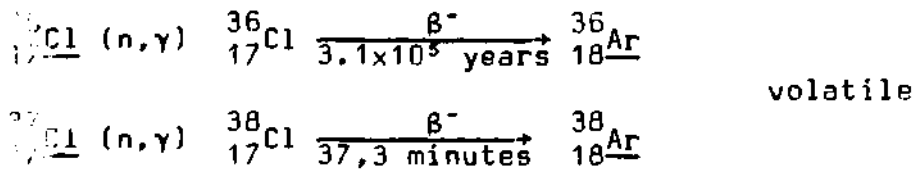


However not only (n,γ) reactions are important here. Much more important is the following reaction



(see ch. 7 for experiment results)

The presence of sulphur also influences the chemistry of the molten fuel (see ch.6).

Sodium having only one stable isotope is also transformed

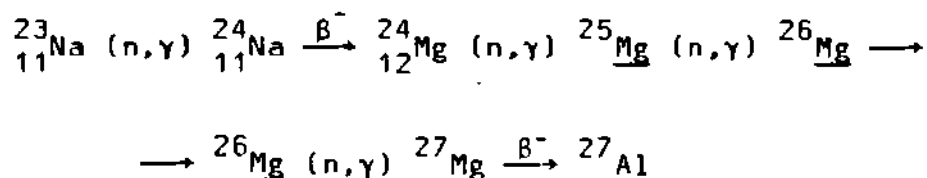

This chain gives rise to increasing amounts of stable magnesium and over larger periods also stable aluminium.

4.8 Conclusions

The system proposed for the transmutation of ${}^{90}\text{Sr}$ and ${}^{137}\text{Cs}$, fulfills the following criteria:

1. The energy balance is positive.
2. The hazardous waste balance is strongly negative. That is, the amount of hazardous material destroyed greatly exceeds the amount of freshly produced, e.g. tritium, ${}^3\text{H}$, and the activation products of the structural material.
3. The rate of destruction (transmutation) is approximately at least one order of magnitude greater than that due to spontaneous beta decay.
4. The period in which a thousand-fold reduction in the hazard can be achieved is the same as the lifetime of one reactor, that is, 20 to 40 yr.
5. The neutron balance of the system is positive. That is, it permits breeding to occur along with the transmutation.
6. The weakest feature is shown in the relationship between the probability of catastrophic release to the environment for the transmutation operation, P_{trans} , to the probability of a similar event in the case of storage, P_{store} , where it is desired that

$$\frac{P_{\text{trans}}}{P_{\text{store}}} < \frac{\text{trans}}{\text{store}} = \frac{\sigma \cdot \phi + \lambda_{\beta}}{\lambda_{\rho}}$$

where λ_{β} is the decay constant.

7. Further optimisations of the system are possible.
8. The proposed system, a molten-salt fast reactor, while rather exotic from a technological point of view, is not as far removed from the present state of technology as some other transmutation proposals (e.g. high-flux high-energy accelerators, controlled thermonuclear reactors) may be.

5. An internally cooled breeder with uranium-plutonium fuel

5.1 Design features and objectives

In this chapter a further variant of the molten salt breeder is described.

The core is cooled by a cooling medium circulating in tubes. The molten fuel is intensively mixed. It remains in the core and no fuel other than that being drawn off for reprocessing is present outside the core.

The unique feature of this concept is the use of a molten fertile material as the cooling medium for the core.

Such a dual function for the fertile coolant results in some unusual properties for this reactor type. The study here is concerned with a molten chloride breeder reactor. The most important features are: (see table 5.1)

- thermal power: 2.05 GW - 1.94 GW in core + 0.11 GW in the blanket

- electrical power: 0.85 GW in the optimum case ($\eta_{eff} = 0.4$)

- molten fuel consisting of (in mol %)

15% PuCl_3 (of which Pu-239 + Pu-241 = 80% and Pu-240 = 20%)

85% NaCl (no $^{238}\text{UCl}_3$ in fuel)

and fission products in the form of chlorides or in an elementary state.

- molten fertile material (in mol %)

65% $^{238}\text{UCl}_3$

35% NaCl

and newly bred PuCl_3 and fission products

- coolant flowing in tubes: made up of the fertile material above. No other coolant in core.

- blanket material: also made up of the fertile material above

- the core is internally cooled. There is no circulating fuel outside the core.

Table 5.1

OBJECT: INTERNALLY COOLED FAST BREEDER POWER REACTOR

REACTOR TYPE :
GEOMETRY: INTERNAL ZONE : CORE, Fuel
(M) WALL : Iron, Molybdenum
INTERMEDIATE ZONE: cooling tube with fertile material
WALL :
EXTERNAL ZONE : Fertile zone
WALL, REFLECTOR : Iron

POWER (GW thermal) : 2.1
POWER DENSITY (GW therm/m³ core) : 0.22
NEUTRON FLUX, MEAN (n/cm²s) : 7×10^{15}

FISSILE NUCLIDE: Pu-239/241
DILUTENT : NaCl, UCl₃
COOLING SYSTEM : Internal, in tubes by fertile material
BREEDING RATIO : 1.38

PARAMETER STUDIED : Design
: Tube materials
: Pu/U ratio
: Temperature

METHOD OF NEUTRONIC : ANISN S4
CALCULATION : 23 Groups
: P₁ APP.
: GCC3 CODE
END

- the fuel and coolant flow concurrently (Fig. 5.1)
- the reprocessing plant is in close proximity to the reactor ("under same roof")
- the fuel in the core, and the coolant is pumped with a velocity of 2 and 9 m.s⁻¹ respectively.
- structural material: possibly molybdenum along with small amounts of other metals e.g. Ni, Fe.


The advantages of the proposed reactor are as follows -

- no separate coolant, no "foreign" cooling agent (e.g. sodium, helium etc.) in the core which results in a more satisfactory system with improved neutron balance.
- the fuel inventory is very small due to lack of a separate cooling system and the small out of core inventory due to the directly coupled reprocessing plant.
- the fuel contains only plutonium and no uranium which simplifies the processing technology and removes the danger of uranium trichloride oxidation which also improves the corrosion properties of this medium
- the high velocities of both fuel and coolant, significantly reduces the temperature gradients in the equilibrium state and reduces the mass transport mechanisms. These are very sensitive to temperature gradients and play a large role in corrosion.

However the disadvantages are numerous:

- the first and most important is of course corrosion. The molten chloride medium especially in neutron and gamma fields, at high temperatures and velocities with chlorine being virtually freed in the fission process from plutonium chloride presents a very serious problem which must, and probably could be solved.
- the most likely structural material seems to be molybdenum alloy which among other things gives rise to parasitic absorption of neutrons.
- the fuel is circulated by a pump which must be located in or close to the core which increases the corrosion problems.
- the high fuel and coolant velocities result in high pumping costs and could cause severe erosion.

Fig. 5.1 Circuit schematic

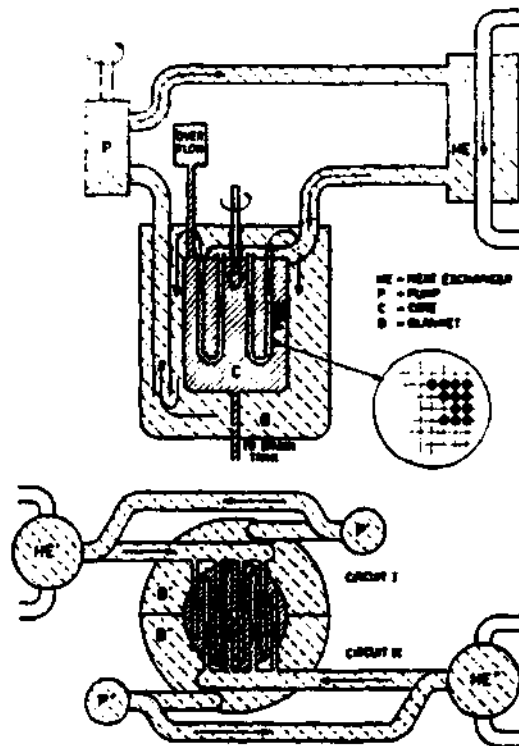

**Table 5.2 Molten chloride fast breeder reactor (MCFBR)
"CHLOROPHIL"**

Electrical power, approx	MW(elect)	800
Thermal power, total/in core	MW(thermal)	2050/1940
Core volume	m ³	8.75
Specific power	MW m ⁻³	220
Core geometry	m	height 2.02/2.36 dia.
Fuel: liquid PuCl ₃ NaCl	mol %	16/84
Liquidus/boiling point	°C	685/1500 (appr.)
Fuel mean temperature	°C	984
Fuel volume fraction in the core		0.386
Power form-factors radial/axial		0.60/0.78
Fast flux, mean across core	n cm ⁻² s ⁻¹	7 x 10 ¹⁵
Fuel density at 984°C	kg m ⁻³	2344
Heat capacity, 984°C	kJ Kg ⁻¹ K ⁻¹	0.95
Viscosity, 984°C	g cm ⁻¹ s ⁻¹	0.0217
Thermal conductivity, at 750°C	W cm ⁻¹ K ⁻¹	0.007
Fuel salt in core	kg	7900
Total plutonium in core/in system	kg	2900/3150
Plutonium in salt	weight %	36.4
Mean plutonium specific power	MW(th) kg ⁻¹	0.67
Mean plutonium specific power in entire system	MW(th) kg ⁻¹	0.62
Coolant liquid U-238 Cl ₃ /NaCl	mol %	65/35
Liquidus/boiling pint	°C	710/1700
Coolant temperature inlet/outlet	°C	750/793
Coolant volume fraction in the core		0.555
Coolant density	kg m ⁻³	4010
Coolant salt in core/in blanket	kg	19,500/165,000
Total volume (95 cm)	m ³	47.85
Fuel (shell side, pumped), velocity	m s ⁻¹	2
Coolant velocity	m s ⁻¹	9
Number of coolant tubes		23,000
Tubes inner/outer diameter	cm	1.20/1.26
Tubes pitch	cm	1.38
Breeding ratio, internal/total	-	0.716/1.386
Doubling time, load factor 1.0/0.8 yr.	years	8.5/10.5

Mean flux across core $7.0 \times 10^{15} \text{ n cm}^{-2} \text{ s}^{-1}$
in centre $1.2 \times 10^{16} \text{ n cm}^{-2} \text{ s}^{-1}$

Temperature coefficient of reactivity $\delta k(\%)/\delta T(^{\circ}\text{C})$

- fuel $- 3.8 \times 10^{-2}$

- coolant $+ 1.29 \times 10^{-2}$

Reactivity wall for vessel 0.72% (10 mm thickness).

5.3 Neutron Physics (according to J. Ligou, 1970)

The 22 group transport calculation gives 125 cm (8-18 m³) for the critical radius of the core with a blanket thickness of 95 cm (36.42 m³). The detailed neutron balance is given in table 5.3.

The relative fluxes for each group are to be found in table 1.3 for core centre and core boundary. The corresponding one group cross sections are given in table 5.4. In Fig. 5.2 the neutron spectra (flux per lethargy unit) are compared to that of the fast critical facility ZPR - 3 - 48. This last spectrum is slightly harder but the spectrum of the molten chlorides fast breeder compares favourably with that of a power LMFBR. From table 5.3 one can deduce the following parameters

$$k_{\infty} = 1.385$$

$$\text{Breeding ratio } BR_{\text{core}} = 0.716$$

$$BR_{\text{blanket}} = 0.670$$

$$BR_{\text{total}} = 1.386$$

For the given core (125 cm radius) the blanket thickness was varied between 75 cm and 115 cm. Fig. 5.4 shows the variation of breeding ratios obtained from the new transport calculations. The reactivity and the core breeding ratio remain practically constant in this range making the adjustment of the core volume unnecessary.

Above 100 cm improvement of the breeding ratio by increasing the blanket thickness gives a poor return. For example to increase the breeding ratio from 1.40 to 1.45 requires a thickness increase of 20 cm or a blanket volume increase of 32%.

Table 5.3

Neutronics of internal cooled fast breeder

Core atomic densities (atoms x 10²⁴)

Pu-239	6.6797 x 10 ⁻⁶ atoms cm ⁻³
Pu-240	1.6699 x 10 ⁻⁶
U-238	3.5629 x 10 ⁻³
Cl	1.9495 x 10 ⁻²
Na	6.3017 x 10 ⁻³
Mo	7.386 x 10 ⁻⁶
Fe	5.078 x 10 ⁻³

Blanket (coolant) densities (atoms x 10²⁴)

U-238	6.4023 x 10 ⁻³ atoms cm ⁻³
Cl	2.2718 x 10 ⁻²
Na	3.457 x 10 ⁻³

Neutron Balance

Region	Nuclide	Atoms (cm ³ x 10 ²¹)	Absorption	Leakage	Production
Core	²³⁸ U	3.5629	25.50 (n,γ) 22.51 (n,f) 2.99	27.40	8.23
	²³⁹ Pu	0.66796	34.56 (n,γ) 5.58 (n,f) 28.98		85.55
	²⁴⁰ Pu	0.16699	3.78 (n,γ) 2.24 (n,f) 1.54		4.72
	Na	6.3017	0.26		-
	Cl	19.495	3.16 (in fuel 1.10) (in cool. 2.06)		-
	Fe	5.078	1.30		-
	Mo	0.7386	2.04		-
	F.P.	0.0697	0.50		-
Total core			71.10		98.50
Blanket	²³⁸ U	6.42	23.70 (n,γ) 23.15 (n,f) 0.55	2.9	1.50
	Na	3.457	0.08		-
	Cl	22.72	2.22		-
Total blanket			26.00		1.50

Fig. 5.1 Chlorine absorpt. cross-sections σ_{Cl}^{235} (Jan. 1973)
Asymptotic cross-sections of chlorine






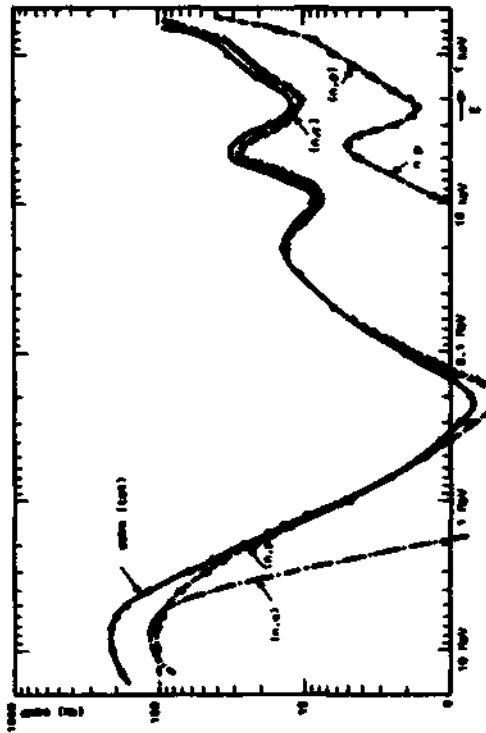


Fig. 5.2 Neutron Spectra and Chlorine Cross Sections

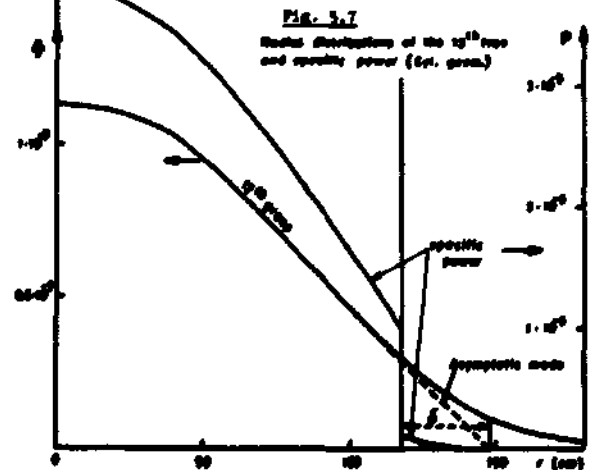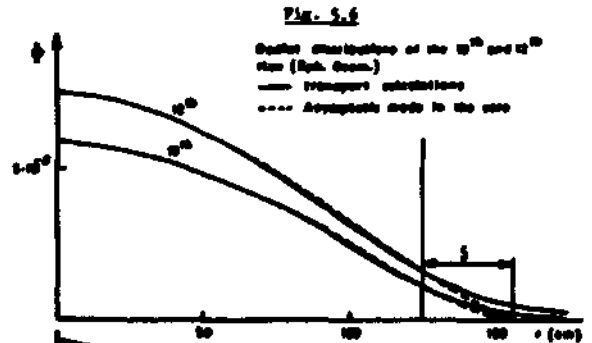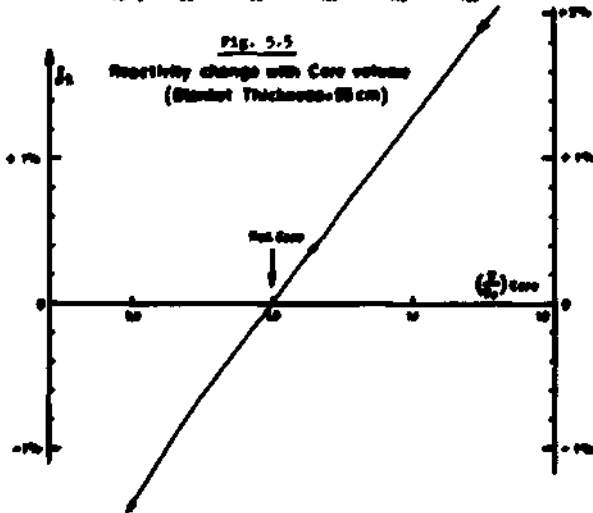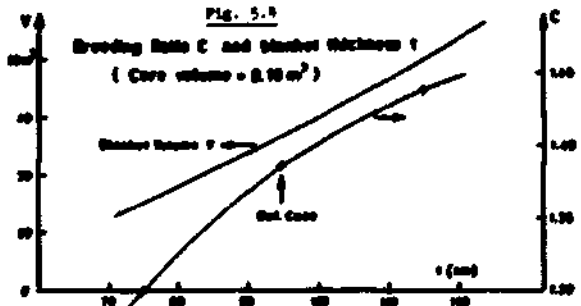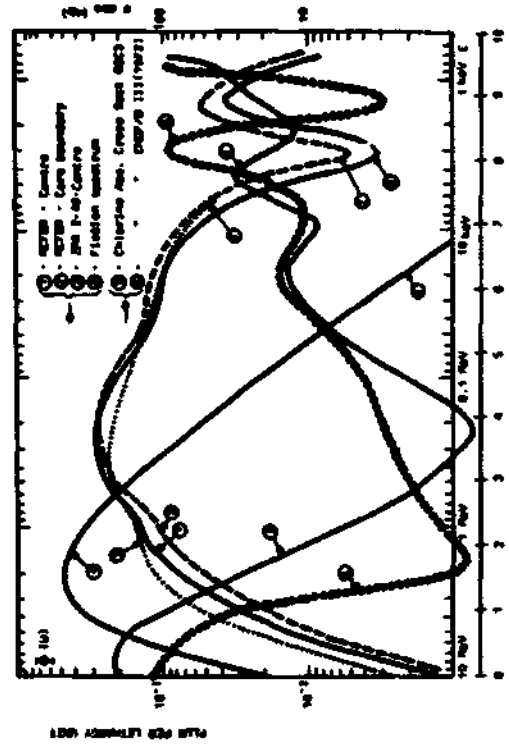

On the other hand the reactivity depends on the core radius. Fig. 5.5 shows the variation of reactivity with increasing core size. Such a curve is very useful when it is required to translate the cost in reactivity of a supplementary parasitic absorption into an increase in core volume (or plutonium inventory). The transport calculations used in Fig. 5.5 could not be used to obtain the corresponding variations in breeding ratio, rather they have been calculated from the information in table 5.3. (assuming small core volume variation < 10% and no important changes in spectra).

This gives

$$1) BR_{total} \approx 1.386 - 2.45 \delta k \text{ (breeding in core unchanged)}$$

The effects of modifying the core composition can be evaluated by the same method. This is arranged to avoid altering the properties of the coolant and fuel by varying the coolant tube diameter. The reactivity is very sensitive to this parameter. If ϵ and η are respectively the relative increases in fuel

Table 5.4 One group cross sections based on the reference 22 group transport calculation

(barn = 10^{-24} cm²)

Type of Nuclide	Core Spectrum			Blanket Spectrum		
	σ_c	σ_f	$\bar{\nu}$	σ_c	σ_f	$\bar{\nu}$
²³⁸ U	0.249	$3.30 \cdot 10^{-2}$	2.746	0.326	$7.71 \cdot 10^{-3}$	2.715
²³⁹ Pu	0.329	1.709	2.951	0.536	1.841	2.917
²⁴⁰ Pu	0.527	0.364	3.052	0.790	0.174	2.998
Na	$1.62 \cdot 10^{-3}$	-	-	$2.044 \cdot 10^{-3}$	-	-
Cl	$6.38 \cdot 10^{-3}$ ($8.64 \cdot 10^{-3}$)*	-	-	$8.83 \cdot 10^{-3}$ ($9.11 \cdot 10^{-3}$)*	-	-
Fe	$1.01 \cdot 10^{-2}$	-	-	$1.43 \cdot 10^{-2}$	-	-
Mo	0.109	-	-	0.168	-	-
FP	0.225	-	-	0.362	-	-

* These values were computed on the bases of ENDF/B, III data.

and coolant volume for a constant pitch are as

$$\eta = - 1.44 \epsilon$$
$$\text{and } k = \frac{1 + 8.23 \times 10^{-2} \epsilon + 0.9027 \eta}{1 + 0.2756 \epsilon + 0.3944 \eta}$$

which gives

$$\delta k = - 0.924 \epsilon$$
$$\eta = 1.56 \delta k$$

The corresponding relationships for breeding ratios (BR) are

$$\text{BR}_{\text{core}} = 0.716 - 1.72 \delta k$$
$$\text{BR}_{\text{blanket}} = 0.670 - 1.05 \delta k$$
$$\text{BR}_{\text{total}} = 1.386 - 2.77 \delta k$$

It can be seen that the penalty on the total breeding ratio for the same δk is only slightly greater while the penalty on the increase of plutonium inventory is five times less. Therefore a reduction in the diameter of the coolant tubes is preferable to an increase in coolant diameter, provided of course that an increase in coolant velocity is admissible. This last assumption is implicit in these calculations since the coolant density was kept constant.

In the whole system the chlorine absorption represents 5.38%. We have seen that the GGC-3 values are different from the more up to date ones (ENDF/B-III). On the basis of these new cross sections given in Fig. 5.3 (curve 6) and assuming that the reference spectrum is unchanged, a computation of the one group cross sections gives 8.46 mb instead of 6.38 mb in the core, and 9.11 mb instead of 8.83 mb in the blanket. In this last region the spectrum is softer and the increase of cross sections in the energy range ($E \sim 0.6$ MeV) is almost compensated for by the decrease at the lower energies (10 keV - 0.6 MeV).

The total absorption by chlorine for the whole system is 6.57% instead of 5.38% giving a loss of reactivity of 1.2%. This loss could be replaced by a 1.9% increase in Pu inventory if a very small decrease (0.65%) of the coolant tube diameter is accepted. Otherwise by changing only the core radius a greater increase of Pu inventory (10%) is required (Fig. 5.5)

Even with this latest data the problem of parasitic capture in the chlorine is not dramatic and there is no reason to believe that there is no need to enrich the chlorine ^{37}Cl . This is consistent with the conclusions of Nelson. Fig. 5.3 clearly shows the importance of the energy distribution (spectrum corresponds to the chlorine cross section minimum (65% of neutrons are in an energy range where $\sigma_{\text{Cl}} \leq 5$ mb). This fact was not perhaps recognised 15 years ago when fine spectrum calculations were not possible. This could explain the pessimistic conclusions of several eminent physicists.

For the molybdenum alloy chosen (20% Mo) the reactivity penalty (2%) is quite acceptable. However the cost could rapidly become prohibitive if the volume of the structural material and/or the molybdenum content should increase for design reasons. In the context of more detailed design studies this point may become more important than the definition of the proper chlorine cross-sections. It does however seem likely that the molybdenum cross sections used in GCC-3 were overestimated.

In the simplified calculations, no core vessel was allowed for at the core/blanket boundary but all the required information is available - fluxes, one group cross sections etc. (Table 5.4). Using the same alloy for the vessel (20% Mo) the one group macroscopic absorption cross section is $2.56 \times 10^{-3} \text{cm}^{-1}$ giving a loss of reactivity:

$$\delta k(\%) = 0.721 e \quad \text{where } e \text{ is vessel thickness in cm.}$$

For 19 mm thickness a value of 1.37% is obtained for loss of reactivity which would have to be compensated for by an increase of core volume of about 10% i.e. about 9 m^3 instead of 8.18 m^3 . A better solution would be an increase in the plutonium inventory of about 2.1% in the reference core (loss in breeding ratio $1.386 \rightarrow 1.350$).

Transport calculations (GCC-3 + SHADOK) have been made for different coolant fuel densities, different temperatures (in this case with the density constant to determine only the Doppler effect). The reactivity changes with respect of the reference core are given in table 5.5.

Table 5.5 Reactivity changes

Type of modification	Parameter	Reactivity changes
Fuel density	- 5%	-3.0% { -1.9 (k_{∞}) -1.1 (leakage)}
Coolant density	- 5%	+0.7% { +2.0 (k_{∞}) -1.23 (leakage)}
Fuel temperature	+300 ^o C	0.01%
Coolant temperature	+300 ^o C	-0.14%
Full loss of coolant	-	+17.0% ; very high on k_{∞} (70%)

The partial changes in k_{∞} or leakage are only approximate but the total reactivity changes are evaluated directly and are therefore more precise.

The Doppler effect in the fuel is quite negligible due to compensation between the capture and fission processes.

The effect of full loss of coolant is large and positive but considerably lower than might be expected from crude calculations (k_{∞} changes in the reference spectrum).

From table 5.5 one can deduce the feed back effect which is very important for kinetic studies

$$\frac{\delta k}{\delta k}(\%) = 60\left(\frac{\delta \rho}{\rho}\right)_{\text{fuel}} - 15\frac{(\delta \rho)}{\rho}_{\text{fuel}} - 15\frac{(\delta \rho)}{\rho}_{\text{coolant}} - 4.8 \times 10^{-4} \delta T_{\text{(coolant)}}$$

The void coefficient of the fuel (1st therm) is strongly negative.
1% void

$$\left(\frac{\delta k}{\rho} = - 10^{-2}\right)$$

gives a 0.6% loss in reactivity. If boiling occurs in the fuel it will be rapidly arrested by a decrease in reactor power.

If one considers that all density modifications come from thermal expansions (liquid phase only) one can define general temperature coefficients.

The thermal expansion coefficients are

$$\left(\frac{\delta\rho}{\rho\delta T}\right)_{\text{fuel}} = - 0.63 \times 10^{-3} \text{ K}^{-1}$$

$$\left(\frac{\delta\rho}{\rho\delta T}\right)_{\text{coolant}} = - 0.89 \times 10^{-3} \text{ K}^{-1}$$

Replacing these values in above given equation leads to the following expression

$$\frac{\delta k}{k}(\%) \approx - 3.8 \times 10^{-2} (\delta T)_{\text{fuel}} + 1.29 \times 10^{-2} (\delta T)_{\text{coolant}}$$

In the second term the part played by the Doppler coefficient (4.8×10^{-4}) is quite negligible. For $+ 100^{\circ}\text{C}$ in the fuel the loss of reactivity is $- 3.8\%$ which is very important from the safety point of view. Compared to any kind of power reactor (even the BWR) the advantage of this kind of reactor is quite evident.

For the Nelson (1967) value of the thermal expansion -3.10^{-4} instead of -6.3×10^{-4} one gets $- 1.8\%$ which is very close to the Nelson result -1.5% .

If we postulate an accident condition and assume that the same increase of coolant temperature immediately follows the fuel temperature rise, the overall change in reactivity is defined by:

$$\frac{\delta k}{k}(\%) \approx - 2.51 \times 10^{-2} \delta T$$

This important isothermal and pessimistic coefficient is still negative. Nevertheless during a detailed study of this reactor concept it would be necessary to check the values of the thermal expansion coefficient for fuel and coolant more carefully. The relative value of the coolant term which is positive might prove to be too high if the differences between fuel and coolant became too marked. This problem did not arise with the present data.

In a spherical assembly the fluxes in the core are given to a good approximation

$$\phi(r,E) \approx \frac{\sin Br}{Br} f(E)$$

where the space function is called the "fundamental mode" (solution of

$$\nabla^2 \psi + B^2 \psi = 0$$

in spherical geometry). The critical buckling B^2 is obtained from homogeneous calculations based only on the cross section data of the core, $f(E)$ is the asymptotic spectrum which is space independent far from the core boundary. For the same 22 energy groups one gets: $B^2 = 4.08 \times 10^{-4} \text{ cm}^{-2}$. Using this value a good fit of the "exact fluxes" have been obtained from the complete transport calculations (Fig. 5.6). The asymptotic fluxes cancel for

$$r = R_e = \frac{\pi}{B} = 155.5 \text{ cm}$$

where R_e is the extrapolated radius. By definition the blanket saving is given by

$$\delta = R_e - R_c = 30.5 \text{ cm}$$

where R_c is the core critical radius. The blanket saving depends mainly on the nuclear properties of core and blanket and on blanket thickness. However for thicknesses greater than 60 cm this last effect is very weak. Finally the shape and size of the core have almost no influence on this saving. This parameter, for this reason so important in reactor physics, will be used in the next section for the one dimensional cylindrical calculations.

The axial blanket thickness is taken to be equal to the radial thickness (95 cm), and the core height as $H_c = 200 \text{ cm}$. The critical radius of this cylindrical core has to be determined. The two dimensional transport calculations are too expensive (and unsafe) and only one dimensional calculations have been made, which is sufficiently accurate. Axial transport calculations are not required since the blanket saving is known from the spherical geometry calculations. One can therefore assume the following flux shape.

$\phi(r, Z, E) = (\cos \beta Z) \Psi(r, E)$ for any

r value (including the radial blanket) and

$$-\frac{H_c}{2} \leq Z \leq \frac{H_c}{2}$$

$-\beta^2$ is the axial buckling computed from the extrapolated height: $H_e = H_c + 2\delta = 261$ cm which gives

$$\beta = \frac{\pi}{H_e} = 1.204 \times 10^{-2} \text{ cm}^{-1}$$

$$(\beta^2 = 1.450 \times 10^{-4} \text{ cm}^{-2})$$

The computation of core radius and spatial distribution have been made with the SHADOK code (cylindrical version) by introducing axial leakage defined by β^2 . Before that a first approximation is obtained by introducing the radial buckling α^2 , that is to say assuming for the core only, the shape $\Psi(r, E) \approx J_0(\alpha r) f(E)$ where J_0 is the usual Bessel function. One obtained $\alpha^2 = \delta^2 - \beta^2$ where the critical total buckling is $4.08 \times 10^{-4} \text{ cm}^{-2}$ which gives $\alpha^2 = 2.63 \times 10^{-4} \text{ cm}^{-2}$ and $\alpha = 1.625 \times 10^{-2} \text{ cm}^{-1}$. Then the extrapolated radius of the cylindrical reactor is

$$R_e = \frac{2.405}{\alpha} = 148.0 \text{ cm.}$$

Finally with the previous blanket saving we get a core radius proper of $R_c = 117.5$ cm. The direct transport calculations with SHADOK-code gives $R_c = 118$ cm! This clearly indicates the value of the blanket saving concept. Nevertheless these transport calculations are still necessary because they give the radial distribution of fluxes and specific power over the whole system and more detailed informations. Fig. 5.6 shows some of the radial distributions of flux and specific power. The energy production in the blanket is quite small (1.7% of the core power) because no fissile materials are present (and only fast fissions occur in ^{238}U). In practice it would be higher (say 5%) since the reprocessing process would not be able to remove all the fissile nuclides produced even with continuous fuel (coolant) reprocessing.

The radial form factor for specific power distribution is, for this core

$$\alpha_r = \frac{\text{mean power}}{\text{maximum power}} = 0.60$$

Note; it would be possible to improve this coefficient by choice of different lattices particularly the most reactive at the peripheral region.

The axial distribution of specific power is given with a good approximation. If the axial mean value is unity then this distribution is:

$$P(Z) = \frac{\beta H_c \sqrt{\beta H_c}}{2 \sin \frac{c}{2}} \cos \beta Z$$

$$\text{with } \beta = \frac{\pi}{H_e} = \frac{\pi}{H_c + 26} = 1.2 \times 10^{-2} \text{ cm}^{-1}$$

and $H_c = 200$ cm giving

$$P(Z) = 1.284 \cos \pi \frac{Z(\text{cm})}{261}, (-100 \leq Z \leq 100)$$

and $\alpha_z = 0.78$ for the axial form factor.

This axial distribution is very close to that used by Nelson.

The critical volume is higher for cylindrical geometry 8.75 m^3 compared to 8.18 m^3 : this increase was expected.

Usually the number of energy groups required for a good definition of neutron spectrum is at least 12 for fast critical assembly studies and 22 can be considered desirable. Therefore a 22 group cross section set has been prepared, the code GGC-3 which allows 99 group calculations for a rather simple geometry has been used for this condensation. The cross sections were produced separately for core and blanket and the scattering anisotropy was limited to P_1 which is sufficient for this reactor type. Most of the GGC-3 library data were evaluated by G G A before 1967 but some are more recent.

- Iron - evaluated from ENDF/BI data (Feb. 1968)
- Molybdenum - evaluated from isotopes of ENDF/BI data (July 1968)
- Plutonium 239 - evaluated from KFK -750 Resonance Nuclide (Feb. 1969)

New data concerning chlorine absorption cross sections are available at EIR (Fig. 5.2) they are obtained from ENDF/B-III (Jan. 1972). Unfortunately this information came too late to be used for the transport calculations. Fig. 5.3 (curves 5 and 6) shows that the GGC-3 values were underestimated above 0.6 MeV and overestimated between 10 keV and 0.6 MeV. The effect of this on the reactivity is not great. Taking also the molybdenum cross section from ENDF/B-III one can see that the GGC-3 values are too high. (experiments made with molybdenum control rods in fast critical assemblies could not be reproduced with ENDF/B-I which makes a new evaluation of data necessary).

Fission product data are from Bodarenko (1964). The absorption cross sections for resonant nuclides are obviously shielded. The Nordheim (1961) theory is included in the GGC-3 code, it requires some special data as shown in table 5.6.

Table 5.6

Resonant Nuclide R.	Atomic density N_R ($\times 10^{24}$)	T (K)	σ_R	C_R	$\sigma_m^R 1$	$\sigma_m^R 2$	σ_m^R
^{238}U (Coolant)	6.42×10^{-3}	1042	0.58	0.925	2.15	7.10	20.3
^{239}Pu (fuel)	1.725×10^{-3}	1257	0.40	0.83	26.3	23.0	178.3
^{240}Pu (fuel)	4.32×10^{-4}	1257	0.40	0.83	105.0	111.7	731.7

5.4 Safety Problems, Comments

The molten chlorides reactor seems to be a relatively safe system due to the following reasons

- an extremely high negative temperature coefficient of reactivity, since during a temperature rise part of the liquid fuel is pushed out of the core into a non-critical geometry buffer tank. The dumping of fuel in case of an incident is also possible in an extremely short time.
- in a more serious incident when the fuel temperature increases to 1500-1700°C (depending on external pressure) the fuel begins to boil. The vapour bubbles give rise to a new and unique, very high negative "fuel void effect"
- the leakage of fuel to the coolant is probably not a serious problem because the coolant is continuously reprocessed.
- the leak of coolant to the fuel for the same reason cannot cause large problems (provided the leak remains small).

A rather adverse property of such a molten fuel reactor is the need to initially heat the solidified fuel in a non critical geometry with external power. (e.g. from the electrical grid). This problem has been fully overcome in the case of the molten fluoride thermal reactor (Oak Ridge National Laboratory).

6. CHEMICAL AND RELATED PROBLEMS

6.1 Physical and chemical criteria for salt components

The limiting criteria in the search for fuel, fertile material and coolants for internally cooled systems are as follows

1. small elastic scattering for fast neutrons (Fig. 6.1)
2. small inelastic scattering.
3. low neutron capture cross-sections for fast neutrons
4. thermodynamic and kinetic stability of plutonium and uranium compounds (Fig. 6.2, 6.3, 6.4).
5. melting point below 700°C in the pure state or in the dissolved state (Fig. 6.5, 6.6, 6.7, 6.8, 6.9, 6.10).
6. boiling point above $1500\text{-}1600^{\circ}\text{C}$ for both pure and dissolved states (low vapour pressure) (Fig. 6.11).
7. stability against atmospheric constituents, oxygen, water carbon dioxide. (Fig. 6.12).
8. good heat transfer properties and specific heat capacity (low viscosity, high conductivity etc.) (Fig. 6.13)
9. good corrosion properties if possible (Fig. 6.14)
10. adequate technological or laboratory experience.
11. relatively cheap.

These wide ranging criteria are fulfilled best by the following compounds

PuCl_3 , UCl_3 , NaCl (Table 6.1, 6.2)

Fig. 6.2


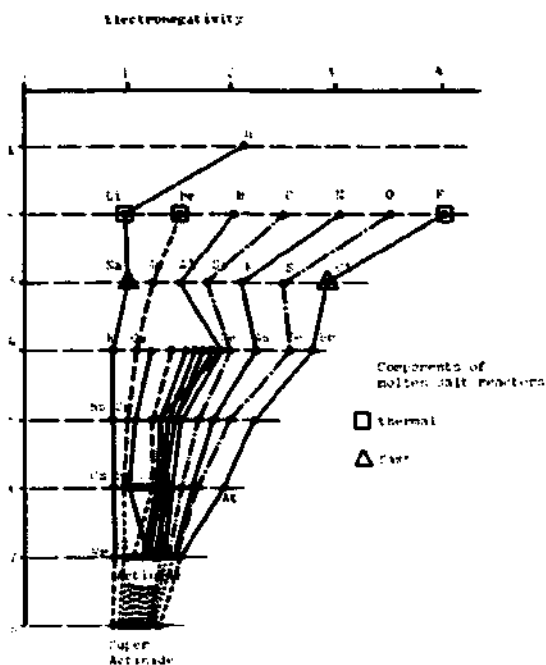


Fig. 6.1

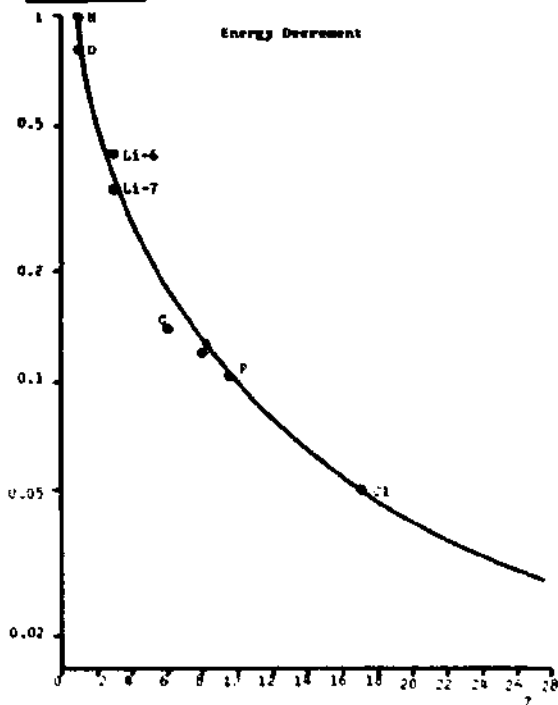

Numerical Values given for ΔS^{1000} in $LiF-BeF_2$ solution

Fig. 6.3

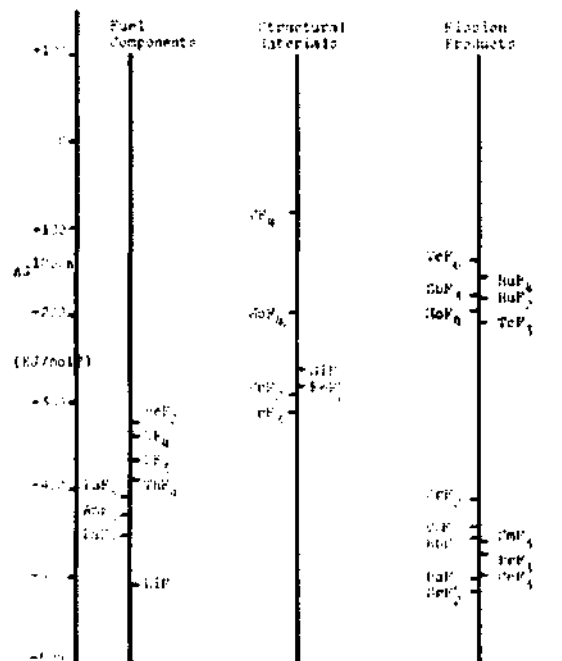


Fig. 6.4


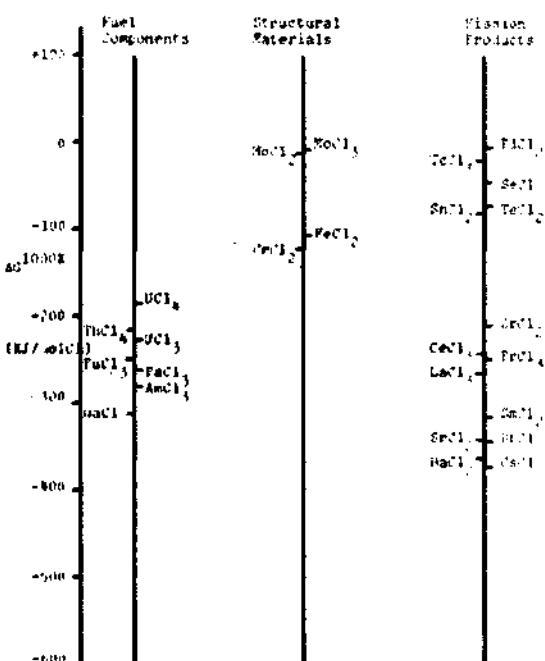


Fig. 6.6 Mixing Point of -

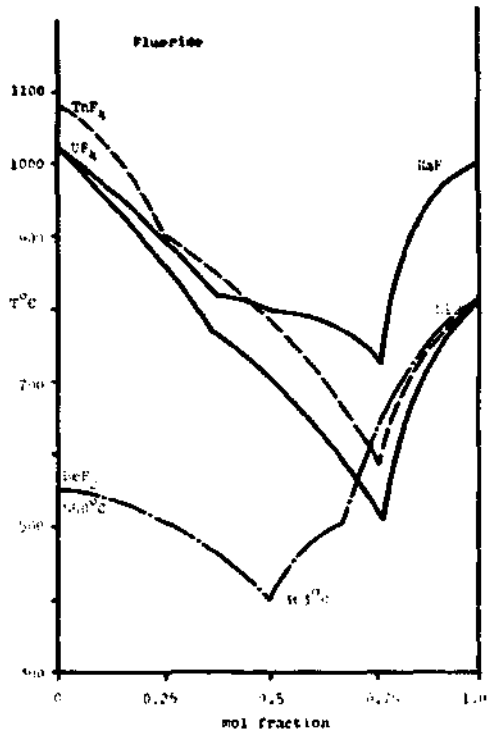

- Selected Salts Fig. 6.5

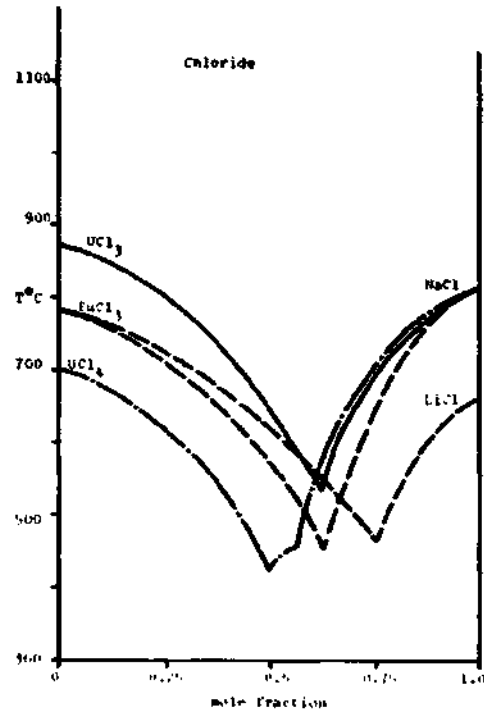


Fig. 6.7 $PuCl_3$ -Alkali Metal Chlorides

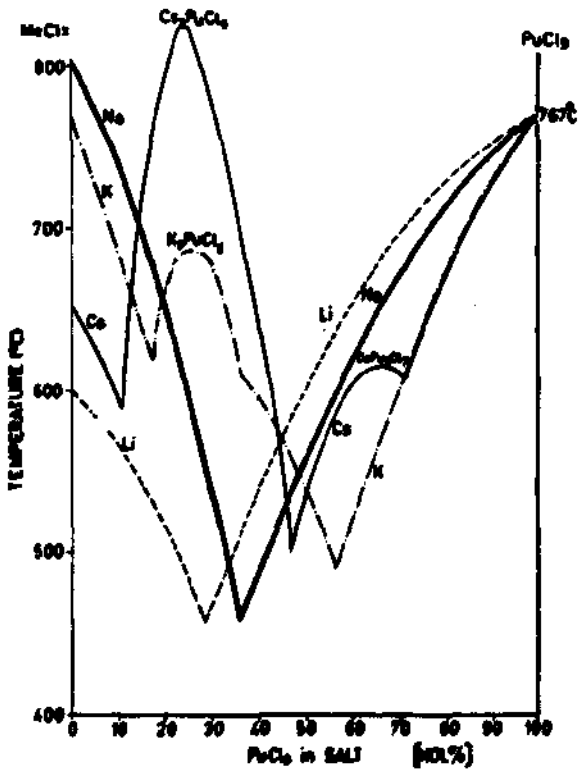


Fig. 6.8 Phase Diagram for $PuCl_3/NaCl$ and $UCl_3/NaCl$

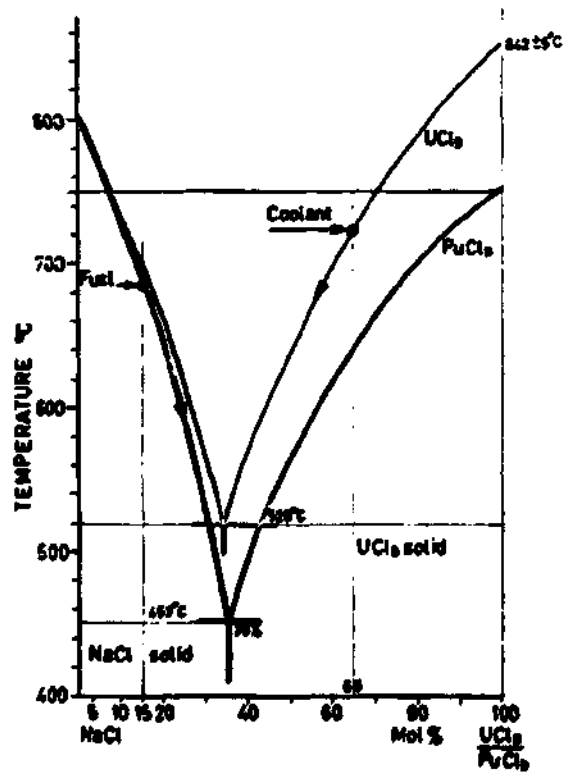


Fig. 6.9 The System $\text{PuCl}_3\text{-MnCl}_2\text{-UCl}_4$.

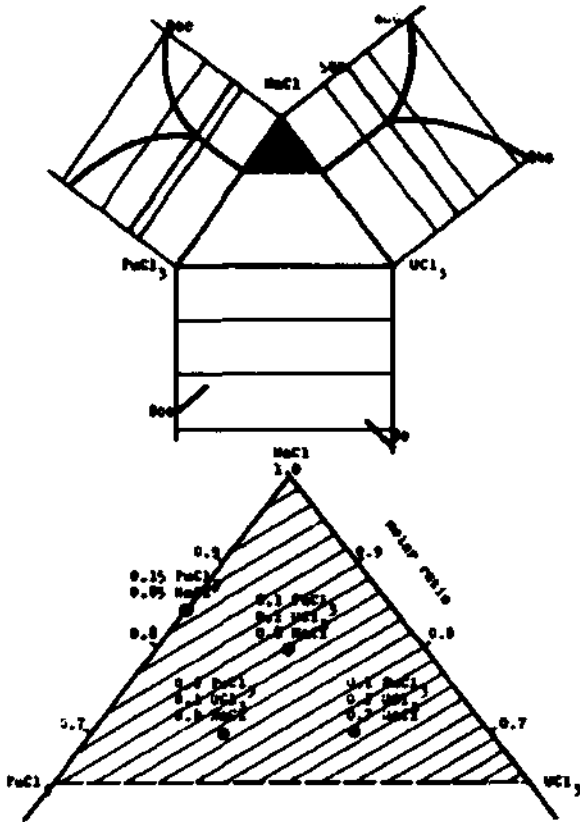


Fig. 6.10 Phase diagrams with thorium

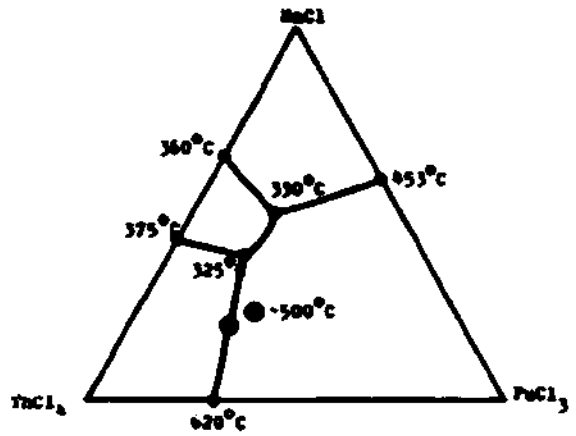


Fig. 6.11 Vapour pressure - metal chlorides

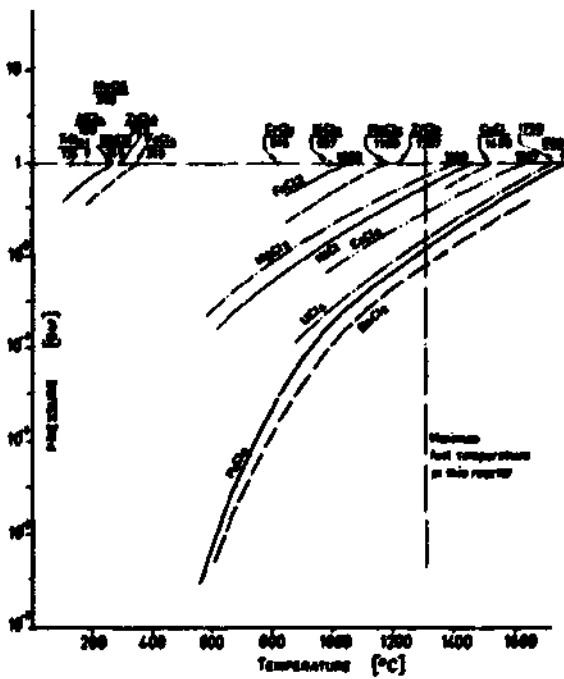


Fig. 6.12 CHLORIDES-OXIDES EQUILIBRIUM DIAGRAM AT 1000°C


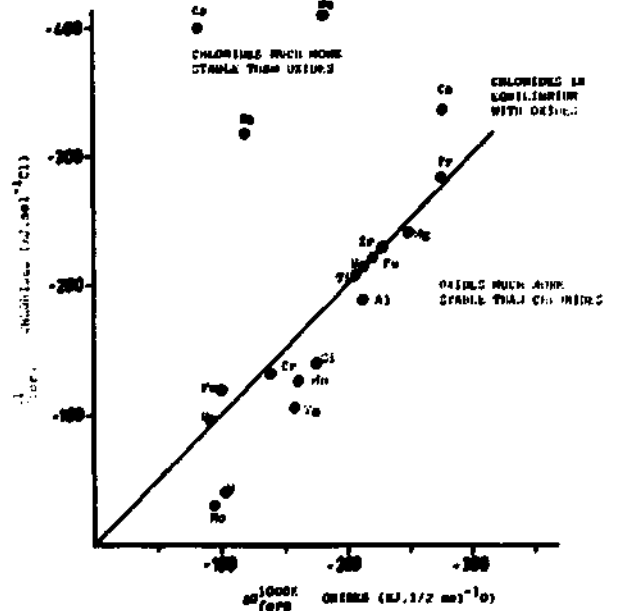


Fig. 6.13 Salt properties at 650°C v. Chemical composition lines derived from balance for $UCl_2/PoCl_2/PuCl_2/MoCl_2$

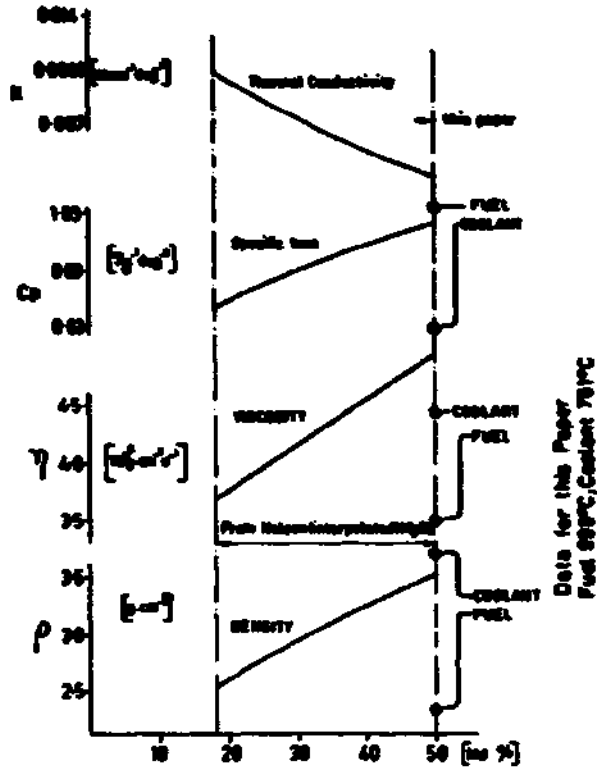

Data for this Paper
Fuel 50°C, Coolant 75°C

Fig. 6.14 Free enthalpy of formation chlorides

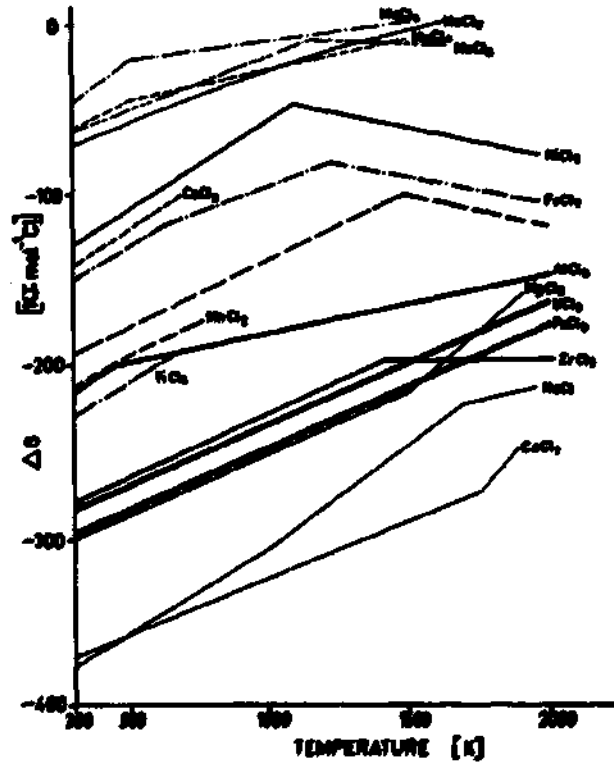


Table 6.1 Properties of fuel components

	PuCl_3	UCl_3	NaCl
Molecular weight	348.3	347	58.4
Postulated molar ratio-fuel	0.15	-	0.20
- blanket material	-	0.65	0.20
Density solid state ($\text{kg}\cdot\text{m}^{-3}$)	5.7	5.57	2.14
Melting point ($^{\circ}\text{C}$)	767	835	800
Boiling point at atmospheric pressure ($^{\circ}\text{C}$)	1730	1720	1465
Melting enthalpy ($\text{kJ}\cdot\text{mol}^{-1}$)	64.0	64	28
Enthalpy of vapourisation ($\text{kJ}\cdot\text{mol}^{-1}$)	240	300	188
Temp coeff. of density (K^{-1})	0.0010	0.0010	0.0005
Specific heat ($\text{J}\cdot\text{mol}^{-1}\text{K}^{-1}$)	140	140	77
Thermal conductivity ($\text{W}\cdot\text{cm}^{-1}\text{deg}^{-1}$)			
Viscosity ($\text{g}\cdot\text{cm}^{-1}\text{s}^{-1}$)	Fuel: 0.025	Coolant: 0.045	0.0143
Temp coeff. of viscosity (K^{-1})	0.0005	0.0005	
Free enthalpy of formation at 1000 K ($\text{kJ}\cdot\text{mol}^{-1}$)	-750	-675	-320

Table 6.2 Other chlorides of plutonium and uranium

	Plutonium	Uranium		
	PuCl ₄	UCl ₄	UCl ₅	UCl ₆
Melting point (°C)	All efforts to produce pure solid PuCl ₄ have been unsuccessful; only in gaseous state with free chlorine, or in molten salt solution or in aqueous solution as complexes	590	(287)	178
Boiling point (°C)		792	(417)	(372)
Free enthalpy of formation at 1000 K (kJ/mol)		4 x -180 = -760	4x-192 = -768	5x-165 = -825

6.2 Corrosion of structural material

6.2.1 General criteria

It is clear that one of the most problematic areas in molten salt reactor technology is the area of corrosion. Some criteria can be formulated as follows

- the free energy of chlorides formation for structural materials must be relatively low, significantly lower than those of plutonium and uranium chlorides but still lower than those of the main fission products
- the partial pressure of the chlorides formed from the structural materials must be rather low which corresponds to a relatively high boiling point for these chlorides (Fig. 6.16)
- the neutron capture cross section for (n,γ) , (n,p) and $n,2n$ must be low (see later)

The structural materials are in principle different for the two types of core discussed.

- internally cooled, using tubes plus the effect of the cooling agent
- externally cooled by pumping the liquid fuel out of the core

These two variants call for different structural materials and different requirements

Cooling method	heat conductivity of the structural material	mechanical behaviour
internally by tubes	very good	very good (thin wall tubes)
externally	not important	not so important

Fig. 6.18 Chlorides - Boiling point vs Free enthalpy of Formation

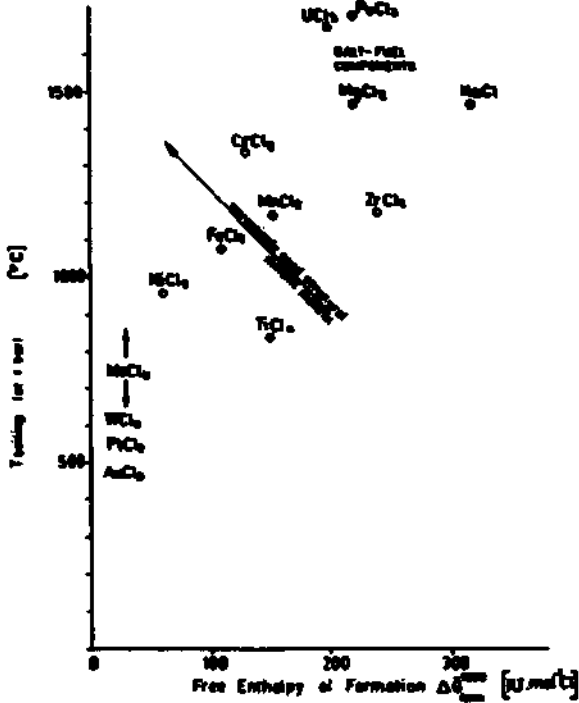


Fig. 6.19 Molybdenum - Metal

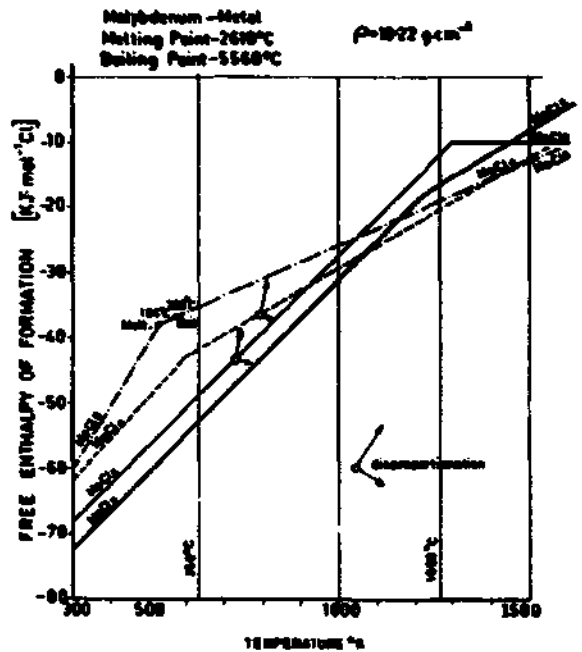


Fig. 6.19


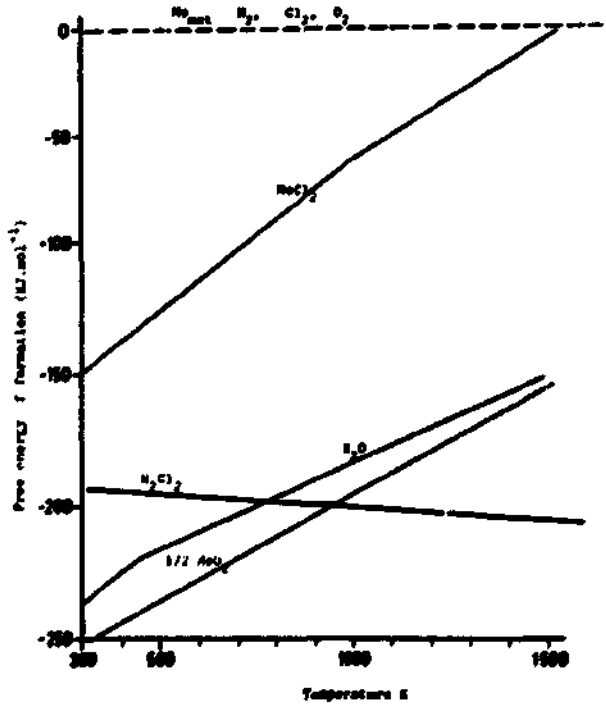


Fig. 6.20 Placon Products in Molten Chloride Media

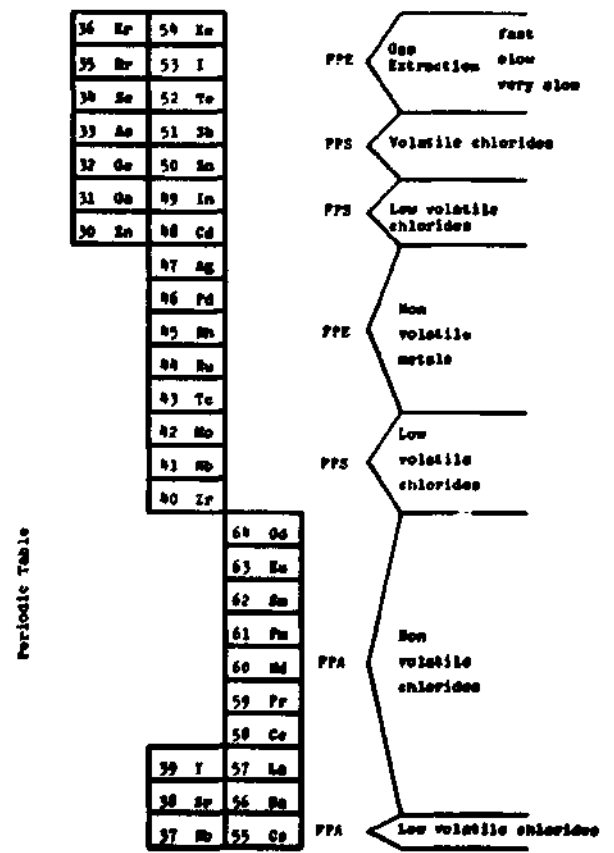


From these and other criteria the following choices may be made


- for the internally cooled core tubes: molybdenum
- for the wall of the spherical core, in the case of the externally cooled reactor: graphite and beryllia.

6.2.2 Molybdenum as structural material

The main corrosion processes result from the following mechanisms (m = metallic phase, s = salt phase, Me = metallic component of irradiated fuel or coolant)





For the behaviour of fresh fuel PuCl_3 in NaCl the most likely reaction is ($T = 1250 \text{ K}$)



$$\Delta G^{1000\text{K}} = + 450 \text{ kJ/mol Cl.}$$

The equilibrium constant of this reaction is small and equals 10^{-17} so that this reaction is completely unimportant.

In the blanket zone the most dangerous reaction is connected with uranium trichlorides (chlorine from the fission of PuCl_3).





the control of the $\text{UCl}_3/\text{UCl}_4$ ratio in the fertile coolant might be feasible due to the continuous reprocessing of this material together with the control of zirconium from the fission products oxidation state.

An additional problem comes from the fact that molybdenum has different oxidation states +2, +3, +4, +5 and all of them have the corresponding chlorides. (see Fig. 6.17)

Further difficulties arise from the problem of the reactions between metal chlorides and oxygen and water.

These reactions (for oxidation state +2) could be written in simplified form



The metal oxides are mostly insoluble in molten chlorides which results in a serious disturbance of the fuel system. From this point of view the metallic elements could be divided into three classes (see Fig. 6.12).

- those which are stable with H_2O and O_2 , that is the chlorides are more stable than the oxides (e.g. Na, Cs, Ba) and partially Ca.
- those which are not stable with H_2O and O_2 and the resulting product is a mixture of chloride, oxychloride and oxide (e.g. Pu, U but also Zr, Ti, Al, Fe, Cr, Mn, Mg - this is the most numerous group of metals).
- those in which chlorides are converted to the most stable oxide in the presence of H_2O or O_2 (e.g. Mo, W) metals of this class seem to be less numerous than those in the other two classes.


This property causes the rapid elimination of traces of water or oxygen in the molten chloride salts of Pu and U. It is also well known that traces of H_2O and O_2 have a very high influence on the corrosion rate. Molybdenum belongs to the last class, the oxide is much more stable than the chloride (Fig. 6.18)

This means that the traces of oxygen or even water will result in the production of molybdenum oxide. This effect requires considerable further study.

6.2.3 The irradiation of molybdenum and iron in a fast high flux reactor

The high neutron flux irradiation causes physical and chemical changes in structural materials.

Molybdenum is a mixture of stable isotopes. The most important by-product of neutron irradiation is the Tc-99 beta-emitter with $t_{1/2} = 2.1 \times 10^5$ years and belongs to the decay chain shown here.

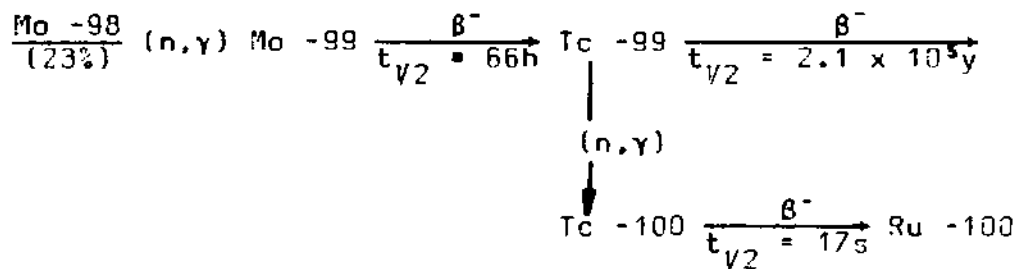

For approx 1000 kg molybdenum in the core in the form of cooling tubes or about 10,000 moles, the Mo-98 gives 2300 mol. The irradiation rate N (mols/s) equals

$$N_{\text{s}^{-1}}^{\text{Mo-99}} = (2.3 \times 10^3) \times (6 \times 10^{23}) \times (10 \times 10^{-27}) \times 10^{16} = 1.2 \times 10^{17} \text{ atom/s}$$

After an irradiation of 700 hrs a steady state concentration of Mo-99 is reached

$$C_{\text{steady state}}^{\text{Mo-99}} = \frac{1.2 \times 10^{17}}{3 \times 10^{-5}} = 3 \times 10^{21} \text{ atoms} = 0.005 \text{ mol}$$

The radioactivity of the Tc-99

$$(t_{1/2} = 2.1 \times 10^5 \text{ y} = 6.2 \times 10^{12} \text{ s}; \lambda = 10^{-13} \text{ s}^{-1})$$

after three years irradiation of 1000 kg of molybdenum in the fast reactor core:

$$\text{Activity } {}^{99}\text{Tc} \text{ (3 year)} = 1.2 \times 10^{17} \text{ atoms/s} \times (3 \times 3.1 \times 10^7 \text{ s/year}) \\ \times \frac{10^{-13}}{3.7 \times 10^{10}} = 3 \text{ Curie/tonne of Mo}$$


The diffusion rate of hydrogen from the molten fuel to the coolant and blanket (here also $\text{UCl}_3 - \text{NaCl}$) must also be mentioned.

One can assume that this melt containing hydrogen is saturated so that the porosity of the wall (molybdenum) will play a minor role. The most important factor is the variation in the mechanical properties of the molybdenum caused by the uptake of hydrogen.


The problem of molybdenum corrosion in chlorine containing media is particularly complicated by the numerous molybdenum chlorides: MoCl_2 , MoCl_3 , MoCl_4 , MoCl_5 (Fig. 6.17)

6.2 Fission product behaviour in the fuel

The fission of PuCl_3 causes the formation of two fission products E' and E'' and three atoms of chlorine



For the fissioning of 100 atoms of Pu the following balance has been suggested

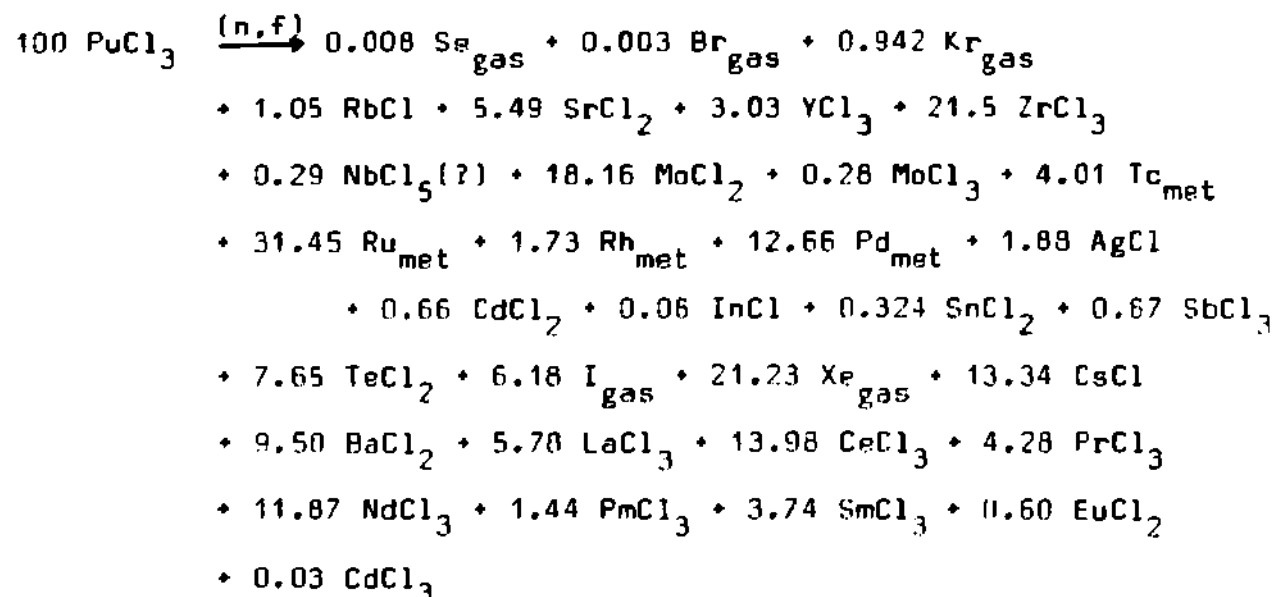

the average balance of fission can be represented in the following manner




Table 6.3 The behaviour of fission products in the molten chlorides fuel. (Yields given represent products for 100 Pu atoms fissioned).

Free enthalpy of formation, $-G^{1250\text{ K}} (\text{kJ}\cdot\text{mol}^{-1} \text{ Cl})$	Principal fuel and structural material	Fission products	Remarks
0	-Mo metal (struct.)	Pd(12.66), Tc(4.01), Rh(1.73), Ru(3.144), I(6.17), Te(7.65) Xe(21.2), Kr(0.94), Br	
			no chlorine for the synthesis of possible metal chlorides
100	-MoCl ₂ (corrosion product)	-MoCl _x (18.16) -MoCl ₃ (0.28)	} 300 atoms of chlorine released from fission of 100 atoms of Pu
		-AgCl (1.88)	
		-SbCl ₃ (0.67)	
		-CdCl ₂ (0.66)	
		-SnCl ₂ (0.32)	
		-InCl ₂ (0.06)	
200	-UCl ₄ (?)		
	-UCl ₃	-ZrCl ₃ (2.15)	
		-ZrCl ₂	
	-PuCl ₃	-YCl ₃ (3.02)	
		-PrCl ₃ (4.28)	
		-EuCl ₃ (1.06)	
		-CeCl ₃ (13.98)	
		-LaCl ₃ (5.78)	
300	-NaCl	-RbCl (1.05)	
		-CsCl (13.75)	
		-SmCl ₂ (3.73)	
		-SrCl ₂ (5.48)	
		-BaCl ₂ (9.50)	

F.P. in elemental form

From the earlier published data (Chasanov, 1965; Harder et al., 1969; Taube, 1961) it appears that the problem of the chemical state (oxidation state) in this chloride medium for the fission product element constituent requires further clarification.

From a simple consideration it seems that the freeing of chlorine from the fissioned plutonium is controlled by the fission product elements with standard free enthalpy of formation up to ~ 20 KJ/mol of chlorine, that is up to molybdenum chloride. The more 'noble' metals such as palladium, technetium, ruthenium, rhodium and probably tellurium and of course noble gases: xenon, krypton plus probably iodine and bromine, remain in their elementary state because of lack of chlorine. Molybdenum as a fission product with a yield of 18% from 200% all fission products may remain in part in metallic form. Since molybdenum also plays the role of structural material the corrosion problems of the metallic molybdenum or its alloys are strongly linked with the fission product behaviour in this medium.


The possible reaction of UCl_3 and $PuCl_3$ with $MoCl_2$ resulting in further chlorination of the actinides-trichlorides to tetrachlorides seems, for $PuCl_3$ very unlikely ($\Delta G^{1000K} = -450$ kJ/mol Cl) but this is not so for UCl_3 .

A rather serious problem arises out of the possible reaction of oxygen and oxygen containing compounds (e.g. water) with $PuCl_3$ and UCl_3 which results in a precipitation of oxides or oxychlorides. The continuous reprocessing may permit some control over the permissible level of oxygen in the entire system as well as the continuous gas bubbling system with appropriate chemical reducing agent.

Corrosion of the structural material, being molybdenum is also strongly influenced by the oxygen containing substances, A protective layer of molybdenum however, may be used on some steel materials using electrodeposition or plasma spraying techniques.

Note that all these considerations have been based on standard free enthalpy; but even a change in the thermodynamic activity from $= 1$ to $= 0.011$ which means a change in free enthalpy of 14 kJ mol⁻¹ thus appears insignificant as far as these rough calculations go.

In the fertile material reactions also occur and the most important are

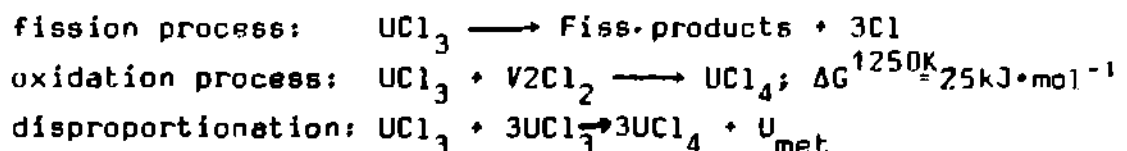

6.4 Some comments on reprocessing

Breeder reactors as is known form part of a breeder system which includes not only the power reactor but also the reprocessing plant.

The advantages of molten salt breeder reactors become particularly apparent when the reprocessing plant is under the same roof as the power reactor and when chemical separation processes take place in the high temperature molten salt media in a continuous cycle. From Fig. 6.2 it can be seen that all fission products might be classified into 3 classes.

FPA = fission products of alkali and alkali earth but also rare earth elements which have free enthalpy of chloride formation greater than those of PuCl_3 .

FPS = fission products of semimobile metals with free enthalpy of formation smaller than those of PuCl_3 .

FPE = fission products existing in elementary form because of the low free energy of chloride formation or negative balance of chlorine.

The separation of plutonium or Uranium from the irradiated fuel by means of pyrochemical techniques could be carried out for example in the following way.

Molten salt, primary phase Pu, FP (part of FP remains)
Metallic phase (part of FP remains)
Molten salt, secondary phase containing only Pu.

This is the so called metal transport process. The proposed schematic of separation processes utilizing metal transport is given in Fig. 6.21 and 6.22.

Fig. 6.21 Fuel reprocessing flow scheme


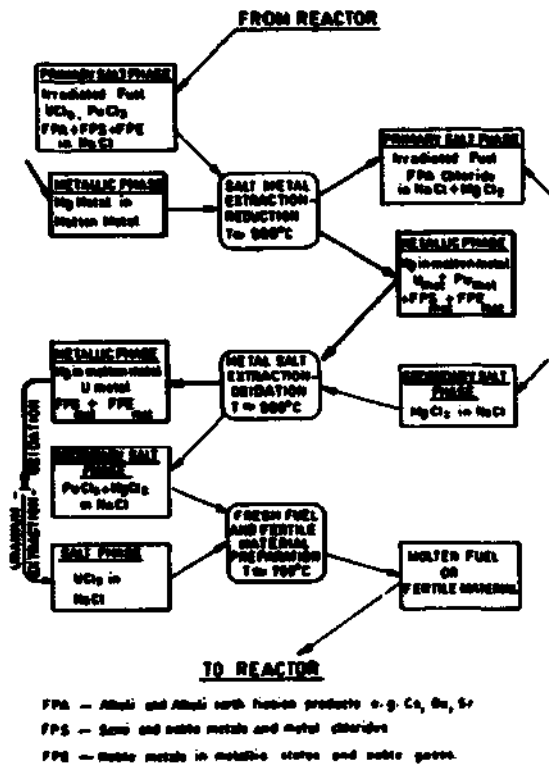


Fig. 6.22 Fuel Reprocessing Material balance

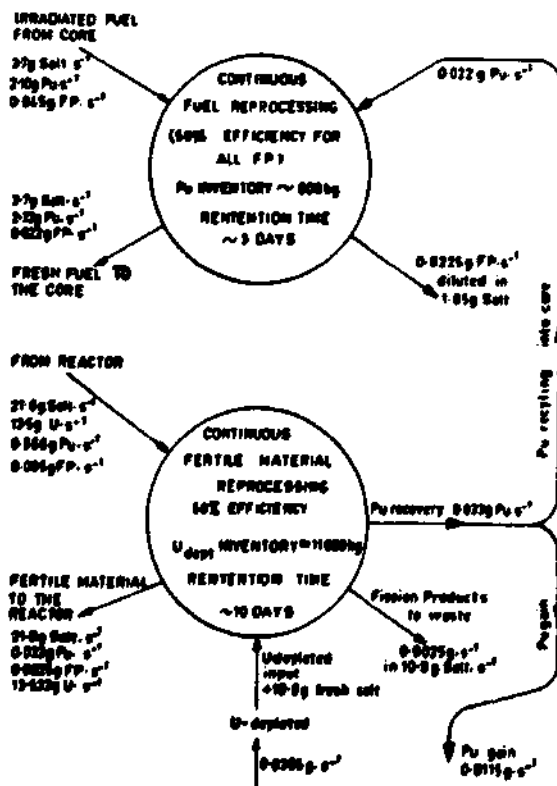

6.5 In-core continuous gas purging

6.5.1 The proposal

In this type of reactor an in-core continuous gas purging of the molten fuel which can significantly improve the safety in an in-core accident, is possible.

A mixture of hydrogen-helium gas is continuously bubbled through the liquid fuel in the core. The mean dwell time of the gas-bubbles needs to be controlled and the mean transport time of the molten components to these bubbles must also be controlled (e.g. if speed-up is desired-intensive mixing, if delay-local addition of a further gas stream).

The aim of the gas stripping is as follows:

- 1) to remove the volatile fission products which in the case of an accident control the environmental hazard. (I-131, Xe-133, Kr-85 and precursors of Cs-137) and at the same time for the thermal reactor, removal of the I-135, precursor of Xe-135, improves the neutron balance.
- 2) to control the production of delayed neutrons since most of the precursors and nuclides of this group are very volatile, e.g. + Br-I-isotopes.
- 3) removal of oxygen and sulphur, continuously (see Chapter 7)
- 4) *in situ* control of corrosion problems on structural materials

For the sake of a first approximation a gas flux of 30 cm³ per sec. (normal state) of H₂/He is arbitrarily assumed. At 20 bar pressure and with a dwelling time in core of 20 seconds, the gas bubbles will only occupy a fraction of the core equal to 10⁻⁵ of its volume and have little influence of the criticality, (but the collapsing of bubbles results in a positive criticality coefficient).

The system proposed for continuous removal of the volatile fission product from the core itself has a retention time of some hundreds of seconds only. Each reprocessing mechanism which operates out of core is limited by the amount of molten fuel being pumped from the core to the reprocessing plant. This amount, due to the high capital cost of the fuel and high operation costs cannot be greater than that which gives a fuel in-core dwell time of about one week. Even with a 1 day dwell time, that is, if after one day the fuel goes through the reprocessing plant, no acceptable solution to the I-131 problem is obtained since the activity of this nuclide is only diminished by one order of magnitude. Only a direct in-core removal gives the dwell time in core as low as some hundreds of seconds.

6.5.2 Delayed neutron emitters

The principal question arise out of the fact that some of the short lived iodine and bromine (perhaps also arsenic, tellurium) isotopes are the precursors of the delayed neutrons.

Table 6.4 Precursors of delayed neutrons for Pu-239 fast fission

<u>Group</u>	<u>Half life</u> t V2 (seconds)	<u>Fraction</u> %	<u>Probable Nuclide</u>
1	52.75	3.8	Br-87
2	22.79	28.0	I-137, Br-86
3	5.19	21.6	I-138, Br-89
4	2.09	32.8	I-139, Br-90
5	0.549	10.3	
6	0.216	3.5	

As other possible nuclides the following can be considered + As-85; Kr-92, -93; Rb-92, -94; Sr-97, -98; Te-136, -137; Cs-142, -143. The removal of these delayed-neutron precursors from the core reduces the value of β , which is lower for Pu-239 than U-235. Thus we have a problem of reaching a compromise between an as rapid as possible removal of the hazardous I-131, and as long a dwell time in the core for the delayed neutron precursors: I-140, I-139, I-138, I-137 and the appropriate bromine isotopes.

In this case the mean dwell time of iodine in the steady state reactor is about 100 seconds. It can be seen that the activity of iodine for a 2.5 GW(t) reactor is of the order of only 10 kilo curies (for seconds) activity of approx. 10^4 (or 10^3 for 1000 second extraction rate).

The gas-extraction also influences the other volatile nuclides. From a very rough estimation for these molten salts (with a small excess of free hydrogen) the following fission products and their associated precursors of iodine and bromine can be volatile at 1000°C.

In elementary form: Xe, Kr, Te (?)
In simple volatile hydrides: BrH, IH
In simple volatile chlorides: SnCl₂, SbCl₃, NbCl₃, CdCl₂.

This amount of finally volatile components including I, Br, Xe, Kr amounts to approximately half the total fission products (i.e. 100 micromoles per second). In addition there is the corresponding amount of tritium (from ternary fission). This amount of all fission products corresponds to a gas volume ratio of about 2 cm³/s or 10 times smaller than the postulated amount of hydrogen flow at 30 cm³/s.

The extraction removes all short lived fission products which are volatile under these conditions. Thus not only is the removal of the iodine isotopes and the consequent reduction in production of xenon (e.g. for the atom number: A = 135, 136, 137, 138, 139) achieved but it slows down the in-core production of Cs-137, Cs-138, Cs-139, and then also barium-139

The higher components of the liquid fuel: PuCl₃ and NaCl. The Fuel consists of:

- 15 mol% PuCl₃; boiling point 2040 K
- 85 mol% NaCl ; boiling point 1728 K

One can as a first approximation say that it would have the following composition in the vapour phase: 5 mol% PuCl₃ - 95 mol% NaCl.

The order of magnitude of vapour for pure components at a temperature of about 1250 K is

$$\text{NaCl} \sim 5 \times 10^{-2} \text{ bar}; \quad \text{PuCl}_3 \sim 10^{-4} \text{ bar}$$

For the PuCl₃-NaCl system one assumes here a lowering of the vapour pressure (thermodynamic activity coefficient approx. 0.1). At the postulated volumetric flow rate of 30 cm³ H₂ normal per second, the vapourized amount of plutonium is given by:

$$\frac{30 \text{ cm}^3}{22000 \text{ cm}^3/\text{mol}} \times 10^{-4} \text{ bar} \times 10^{-1} = 10^{-8} \text{ mol Pu/s}$$

This amount of plutonium is of the order of 10^{-6} relative to the amount of plutonium fissioned in the same time (approx 10^{-6} mol Pu/s). However, it still has to be recovered, which unfortunately makes the reprocessing more complicated.

Last but not least is the in-core gas extraction of two other elements

- oxygen in the form of H_2O : oxygen from impurities (i.e. $PuOCl$)
- sulphur in the form of H_2S : sulphur from the nuclear reaction:
 $^{35}Cl (n,p) ^{35}S$

(see Chapter 7).

7. EXPERIMENTAL WORK

7.1 Chemical behaviour of radiosulphur obtained by $^{35}\text{Cl}(n,p)^{35}\text{S}$ during in-pile irradiation (according to Janovici, 1975)

The rather large concentration of sulphur formed by $^{35}\text{Cl}(n,p)^{35}\text{S}$ reaction in the molten chlorides system proposed for the fast reactor makes it necessary to obtain the full information on the chemical behaviour of the radiosulphur. The most recent studies on the chemical states of radiosulphur obtained by n-irradiation of alkali chlorides have shown the complexity of this problem.

To obtain new data on the behaviour of radiosulphur we have investigated the influence of the time and temperature of irradiation and of post-irradiation heating on the chemical distribution of the sulphur.

EXPERIMENTAL

Sodium chloride ("Merck" reagent) was heated for 60hr at 200°C in an oven in vacuo. The dried samples of 100 mg sealed in evacuated (10^{-4} torr) quartz tubes were irradiated near the core of the "Saphir" swimming pool reactor for different periods at a neutron flux of 5×10^{12} and 4.3×10^{12} n cm⁻² s⁻¹. Reactor irradiations were carried out at an estimated temperature of 150°C and -190°C. After irradiation the samples were kept for 8 days to allow the decay of ^{24}Na .

The method of ^{35}S -species separation. The crushing of the irradiated ampoule was made in a special device from which the air was removed by purging with a nitrogen stream containing 10ppm of oxygen. After crushing a gentle stream of nitrogen was allowed to flow for about 10 min. The gases evolved were collected in cooled traps. The irradiated salt was dissolved in 2 M KCN solution containing carriers of S^{2-} , CNS^- , SO_3^{2-} , SO_4^{2-} . During dissolution oxygen was not completely excluded although nitrogen gas was passed continuously through the system. The radiosulphur found in gaseous form was determined as barium sulphate. For the ^{35}S -species separation the chemical method described recently by Kasrai and Maddock was used. The radioactive samples were counted under a thin window Geiger counter. All measurements were made in duplicate with and without Al-absorber.

Post-irradiation heating. The sealed irradiated ampoules were heated in an electric oven at 770°C for 2 hr or at 830°C for about 5 min. and then cooled and crushed in a closed system under a stream of nitrogen.

Results and discussions

Effect of length of irradiation time. As can be seen from Fig. 7.1 S^{2-} remains the preponderant fraction independent of the irradiation time. Formation of S^{2-} is indicated by charge conservation during the $^{35}\text{Cl}(n,p)^{35}\text{S}$ reaction. Alternatively it can be supposed that reduction of sulphur takes place by capture of electrons due to the discharge of F-centers. The presence of S^0 in this oxidation state in the lattice is no longer contested. The precursors of higher forms may be S^+ as a result of an electron loss from S^0 . However, the interaction of chlorine entities formed by irradiation with radiosulphur to form species as SCl , SCl_2^- , SCl_2 may be an important mechanism in forming the precursors of sulphate and sulphite.

During longer irradiations some of the sulphide is converted into higher oxidised forms. This may be a consequence of radiation-produced defects with oxidising character (e.g. V-centres or derivatives). It is possible that the concentration of defects responsible for reduction of the sulphur decreases by annihilation when new traps are formed. The oxidation of radiosulphur with increase of radiation damage concentration may also be due to the reaction of recoil sulphur with chlorine atoms. The presence of OH^- in the crystal must not be neglected. It has been suggested that radiolysis of OH^- can be responsible for accelerating the oxidising process.

Effect of post-irradiation heating. The effect of post-irradiation heating (including melting) can be seen in Table 7.1.

Comparisons between heated and unheated samples are made for irradiations of 2, 12 and 24 hr. For 2 hr irradiation, results on samples heated at a temperature below the melting point of NaCl are also presented. As is seen, on heating, a part of the radiosulphur is found in a volatile form. The volatile radiosulphur appears at the expense of S^0 and higher oxidation forms. The results show that with temperatures above the boiling point of sulphur and above melting point of NaCl the S^0 and S^+ and/or $S_x\text{Cl}_y$ receive sufficient kinetic energy to migrate to the surface or even to escape from the crystal and be collected as volatile radiosulphur. However, there are some differences in the ^{35}S chemical distribution on heating below and above the melting point of NaCl (experiments 2-3). It seems that for relatively short periods of irradiation (2 hr) only the sulphate and sulphite precursors account for the volatile radiosulphur fraction. For a longer time of irradiation, on melting the S^0 value decreases to about 2% and this corresponds to an increase in the volatile radiosulphur (experiments 5, 7). However, a small and practically constant yield of S^0 is found in the melt after longer irradiation

Table 7.1

Expt.	Irrad. time	Post-irrad. treatment	S ₂ ²⁻ %	S ₀ %	SO ₄ ²⁻ + SO ₃ ²⁻ %	S-volat. %
1	2 hrs.	no	73.1 ± 0.4	9.8 ± 0.8	16.3 ± 0.8	0.0
2	"	770°C 2 hrs.	75.4 ± 2.8	5.3 ± 0.3	3.6 ± 2.3	15.4 ± 1.0
3	"	830°C 5 min.	77.2 ± 2.0	11.0 ± 0.8	6.6 ± 2.5	5.0 ± 1.0
4	12 hrs.	no	67.5 ± 0.7	12.1 ± 0.1	20.4 ± 0.6	0.0
5	"	830°C 5 min.	7.15	1.9	18.9	7.6
6	24 hrs.	no	64.4 ± 2.5	11.9 ± 0.5	23.7 ± 2.0	0.0
7	"	830°C 5 min.	68.2 ± 3.4	2.3 ± 0.5	21.4 ± 2.3	7.9 ± 0.5

Expt. 1-5 = $4.3 \cdot 10^{12}$ n cm⁻² s⁻¹

Expt. 6-7 = $5.9 \cdot 10^{12}$ n cm⁻² s⁻¹

* Sulphite fraction is less than 5% in our experiments and always lower than sulphate fraction

times. No significant changes are observed for the sulphide and higher oxidation forms. Comparison of these results and those presented in Fig. 1 shows that in the post-irradiation melted samples the radiation damage does not have the same effect as in the unmelted samples. Supplementary information can be obtained by studying the effect of high temperature irradiation on the distribution of the radiosulphur. It is possible that in the molten state the active oxidising agents have a different identity from those present below melting. The presence of oxygen and probably sodium oxides during melting may have a determinant role in deciding the state of the radiosulphur.

Effect of irradiation temperature.

A comparison of results obtained by irradiation at 423 K and 77 K (Table 7.2) shows that the higher oxidation fraction is lower (3%) at 77 K. As is seen the increased S^0 after low temperature irradiation occurs at the expense of the sulphate + sulphite and sulphide fractions. The defects with oxidising and reducing character formed by low temperature irradiation such as F and V-centres (or derivatives) become important factors in determining the radiosulphur behaviour.

7.2 Temperature dependence of sulphur species (according to Furrer, 1977)

Significant amounts of the order of magnitude of thousands of ppm ^{35}S would be present as steady-state concentration in a proposed fast breeder reactor fuelled with molten Pu/U-chlorides diluted in NaCl. To obtain information about the chemical behaviour, mainly the distribution of oxidation-states, the influence of irradiation temperatures (-190 and 15°C) and the effects of a post-irradiation heat treatment, solid NaCl was investigated and the results published. The subject of the present note are investigations at higher irradiation temperatures, especially with samples molten during irradiation.

Fig. 7.1 Effect of length of irradiation time on the ^{33}S -species distribution

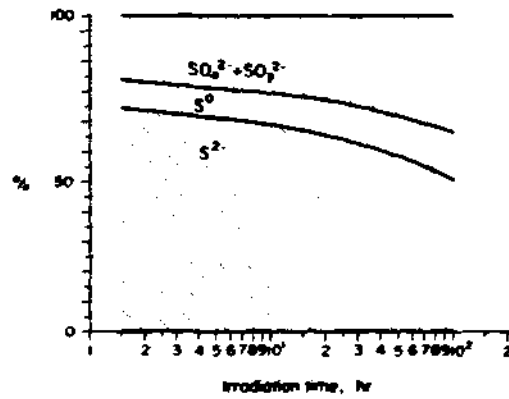


Fig. 7.2 Irradiation-temperature dependence of the oxidation-state distribution of ^{35}S -species

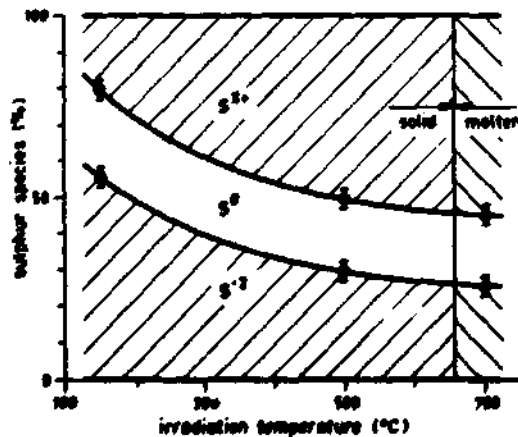


Table 7.2

Irrad. conditions flux, time	Irrad. temp. (K)	$S_{\frac{1}{2}}^{2-}$	$S_{\frac{1}{2}}^{\theta}$	$SO_4^{2-} + SO_3^{2-}$
$5 \cdot 10^{-12} n \text{ cm}^{-2} s^{-1}$ 2 hrs.	423	73.1 ± 0.4	9.8 ± 0.8	16.9 ± 0.8
"	77	65.4 ± 0.9	31.5 ± 1.1	3.0 ± 0.1

Experimental

Equimolar mixtures of NaCl and KCl ("Suprapur", Merck) were studied instead of pure NaCl (m.p. 801 vs 800°C) because the irradiation device permitted temperatures of up to 750°C only. The finely crushed salt-mixture was dried in vacuo at 250°C for 24 hr and subsequently treated with dried HCl-gas at 300°C for 24 hr in order to remove traces of water and hydroxides. 100 mg samples were weighed into quartz ampoules in a glove-box with a purified nitrogen atmosphere (O_2 , H_2O 10ppm).

In order to study the influence of oxygen from the surface of the SiO_2 -ampoules, parts of the samples were weighed into small crucibles made of gold-foil and closed by folding the foil. The ampoules were evacuated to a pressure of less than 10^{-5} mm Hg (24 hr) and during evacuation heated to 250°C for about 8 hr to remove adhering traces of HCl, sealed and irradiated for 2 hr at 500, 600 or 700°C in the swimming-pool reactor SAPHIR near the core at a total flux of about $4 \times 10^{12} n \text{ cm}^{-2} s^{-1}$. The neutron-spectrum is not well characterised but known to be rather hard.

The post-irradiation treatment followed closely the work of (6) as described in detail elsewhere (4.5). The ampoules were crushed at room temperature in a nitrogen atmosphere, volatile reaction products carried by a nitrogen gas-stream into cold-traps cooled with liquid nitrogen and the samples subsequently dissolved in an oxygen-free carrier-solution containing cyanide and sulphide, thiocyanate, sulphite and sulphate as carriers. The fractions were separated, independently oxidized to sulphate, precipitated as $BaSO_4$ and the activities measured with a thin-window GM-counter. Some experiments were made at 150°C irradiation-temperature in order to be able to compare the CaCl/KCl-system with pure NaCl. New irradiations of pure NaCl were carried out in order to study the influence of the HCl pre-irradiation treatment.

Results and discussions

The data for at least 2 independent experiments at 150 and 500°C or 4-5 experiments at 700°C for each set of parameters (pre-irradiation treatment, gold-foil packing, irradiation-temperature) are shown in the following table. Sulphite, sulphate and volatile fractions are tabulated together as S^{x+} . While the sulphite-fraction was always less than 2% of the sulphate-content, the volatile part showed large fluctuations, especially with samples packed into gold-foil, (0.20% of the sulphate content) caused by the variations in sample surface and tightness of the package, even if mechanically destroyed before dissolving. The volatile species still remaining in the slat at dissolution, presumably as S_xCl_y , are immediately hydrolyzed to sulphate and only to a small extent to sulphite in the basic cyanide-carrier-solution. The following figure shows the temperature-dependence of the oxidation state distribution.

The experiments at 150° on NaCl treated with HCl-gas confirmed the existing published results (4.5), which were obtained with a slat dried in vacuo only.

The results of the investigations at higher temperatures and with molten samples show a monotone decrease of the S^{-2} -species and a corresponding increase of the S^{x+} -species with increasing irradiation-temperature. The content of S^0 is influenced neither by the pre-irradiation treatment nor by the irradiation-temperature and is always about 20%. Melting of the samples during irradiation does not influence the distribution of oxidation states. The studies at 150°C show for NaCl/KCl-mixtures a shift of about 20% in S^{-2} towards higher oxidation-states, mainly S^0 , compared to pure NaCl. No influence of the pre-irradiation sample treatment could be shown at 150°C, but it is of importance for work with molten samples. Untreated samples without gold-foil protection showed S^{-2} -levels of less than 2%. HCl-treatment increased this value to about 13%, an additional gold-foil protection to 26%. Oxygen of the quartz surface in contact with the melt is clearly significant at 700°C. The assumption that oxygen from the quartz surface should be of importance for reactions over the gas-phase is not plausible, without mentioning that oxygen-levels in the evacuated ampoules (10^{-5} , Hg) must be much greater but have no significant influence, as low temperature experiments show.

Salt-type	HCl-treatm.	Gold-packing	Irrad. temp. (°C)	State	S ⁻² (%)	S ⁰ (%)
NaCl	No	No	150	Solid	73	10
NaCl	Yes	No	150		72 ± 2	13 ±
NaCl/KCl	Yes	No	150		55 ± 2	25 ±
NaCl/KCl	Yes	Yes	500		30 ± 2	19 ±
NaCl/KCl	Yes	No	600		17 ± 3	22 ±
NaCl/KCl	No	No	700	Molten	2 ± 1	22 ±
NaCl/KCl	Yes	No	700		13 ± 3	22 ±
NaCl/KCl	Yes	Yes	700		26 ± 4	10 ±

Table 7.3 Oxidation state distribution of radi sulphur produced by $^{35}\text{Cl}(n,p)^{35}\text{S}$ in NaCl/KCl solid mixtures and NaCl/KCl-melts

8. THERMOHYDRAULICS

3.1 Introduction

This chapter gives the results of studies on the thermal properties of the following units.

- High flux liquid fuel core with external heat exchanger. This core has the geometrical form of a spherical shell (Fig. 8.1A)
- Power-breeder-core with molten fuel and external heat exchanger. The core is spherical. (Fig. 8.1B).
- Sodium/molten salt heat exchanger.

All the calculations were made in simplified form and were intended only to roughly define the scope of the problems.

8.2 High Flux reactor with the core as a spherical shell

This reactor was designed to meet the following requirements

- a) In the shell type core to achieve the highest possible flux in having a fast spectrum requiring a relatively high power density. Very good mixing in the fluid, i.e. a high turbulence is a vital requirement. For this the flow rate of the fuel has to be kept high.
- b) In the central regions a thermal neutron flux is obtained (Beryllium coated Deuterium hydroxide as moderator). The thermal neutron flux extends partly into the fast core which causes a very high and localised power density. This is the reason for requiring a high fuel turbulence.
- c) In the thermal zone having a neutron flux of approx $4 \times 10^{16} n \text{ cm}^2 \text{ s}^{-1}$ it is possible to transmute the most 'dangerous' fission products Strontium-90 and Caesium-137. Table 8.1 shows the most important parameters.

Fig. 8.1

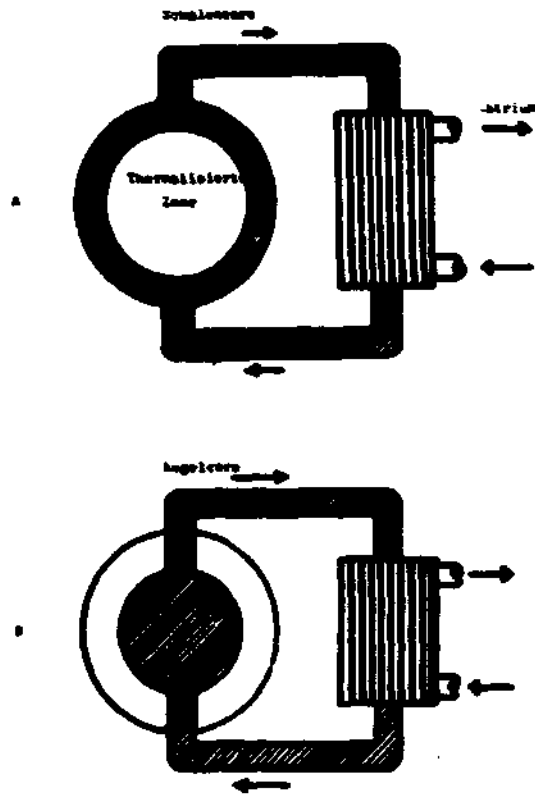


FIGURE 8.1 Reference Cell Schematic

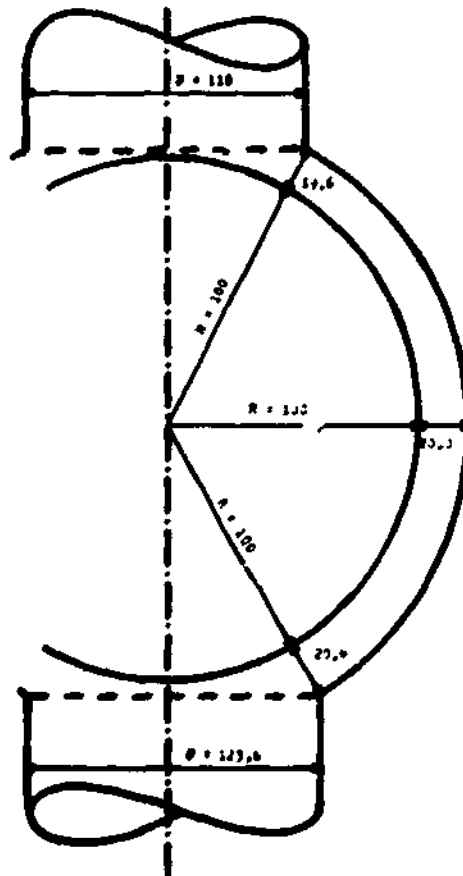


Table 8.1 Shell form High Flux reactor

Property	Unit	Value
Total power	GW _{tot}	6
Core Geometry	see Fig. 8.2	
Core volume	cm ³	3.1 x 10 ⁶
Mean power density	kW·cm ⁻³	2
Specific heat of the fuel (T in °C)	J cm ⁻³ K ⁻¹	0.83 (1-0.5 x 10 ⁻³ (T-850))
Density at 850°C	g cm ⁻³	2.12

The thermal properties of this core were calculated using the following parameters

- Flow rate at input 10-22 m.s⁻¹
- Diameter of the inlet pipe 0.5 - 0.6 m

The inlet temperature was kept constant at 750°C
 The most important variable was the outlet temperature which was varied between 935°C and 965°C

For various reasons a reference concept was used as a basis for the calculations, see Fig. 8.2. A description of the reference design is also given in Fig. 8.3.

The relevant characteristics are given in the following figures:

- Temperature curve Fig. 8.4 A
- Flow rate curve Fig. 8.4 B
- Mean circumference and shell thickness Fig. 8.4 C
- Number of Pu atoms in a layer Fig. 8.5 A

The sudden changes at the start and end are due to the uncertainties in the geometry at the pipe/shell interface.

Density Fig. 8.5 B

Fig. 3.1


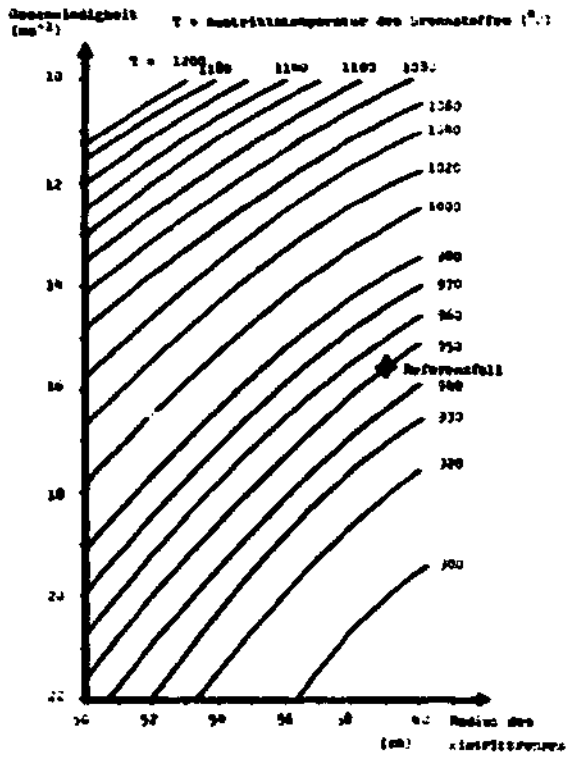


Fig. 3.2

Referenzfall Kristallkörner

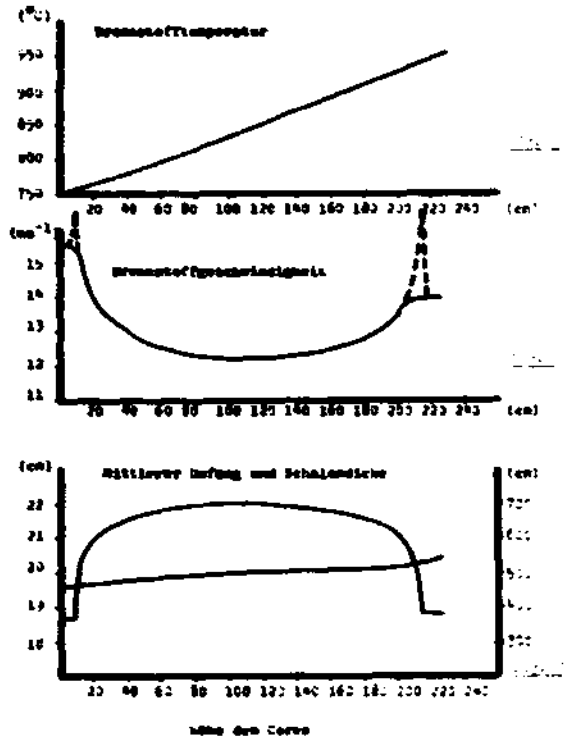

Referenzfall Kristallkörner


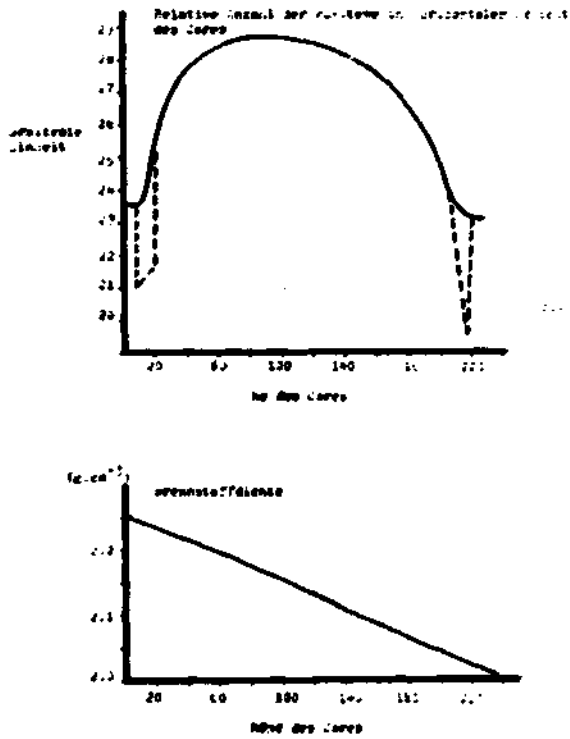


Fig. 3.3 Referenzfall Kugelkörner

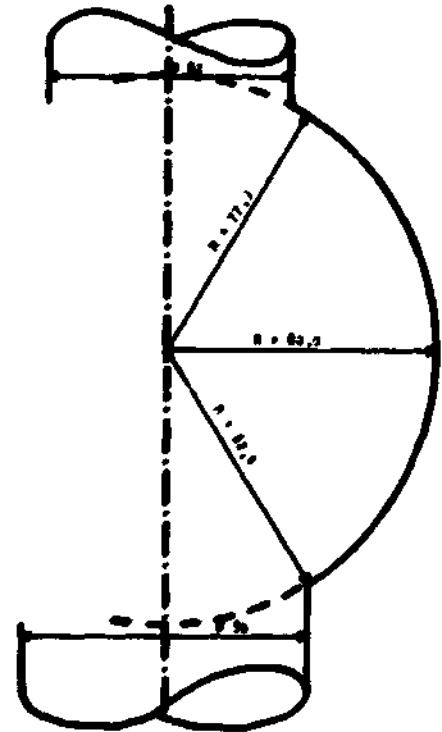

8.3 Power Reactor with spherical core

This reactor was designed to meet the following requirements

- a spherical core with the minimum of structural material in order to optimise the neutron balance and to achieve a hard spectrum.
- a maximum breeding ratio in the core and blanket
- the liquid fuel cooled in an external heat exchanger.

Table 8.2 shows the most important characteristics.

Table 8.2 Power breeding reactor

Characteristic	Unit	Value
Total power	(M(th))	3
Core geometry spherical radius		see Fig. 8.6
Core volume	cm ³	2.3 x 10 ⁶
Mean power density	kW·cm ³	1.3
Specific heat (T in °C)	J·cm ⁻³ ·K ⁻¹	0.83x(1 - 0.5x10 ⁻³ (T-850))
Density at 850°C	g·cm ⁻³	2.92





The thermal parameters of this core have been calculated varying the following parameters

- inlet velocity
- diameter of inlet tube

The inlet temperature was kept constant at 750°C

The main parameter varied was the outlet temperature in the range 935°C to 965°C (see Fig. 8.7).

The given reference case (see Fig. 8.7) is shown in Fig. 8.6. The parameter changes under consideration are shown in figures 8.9 A, B, C and Fig. 8.9.

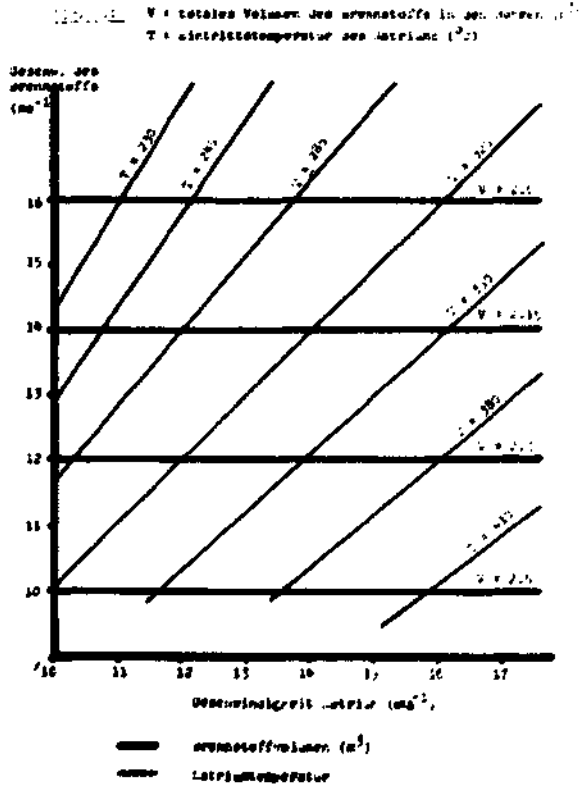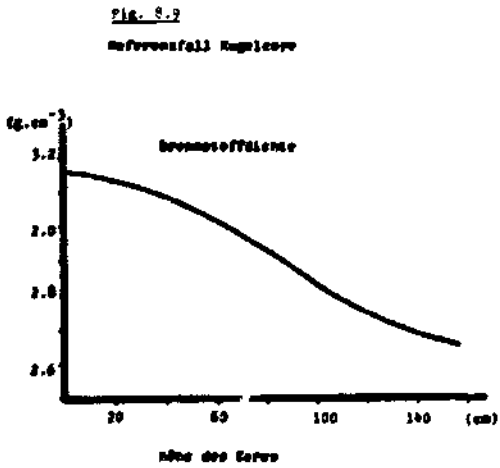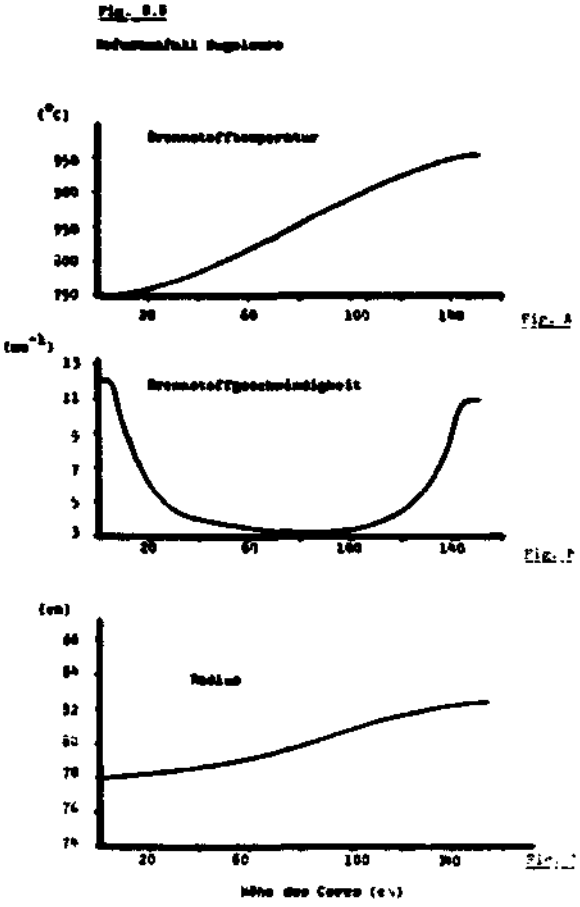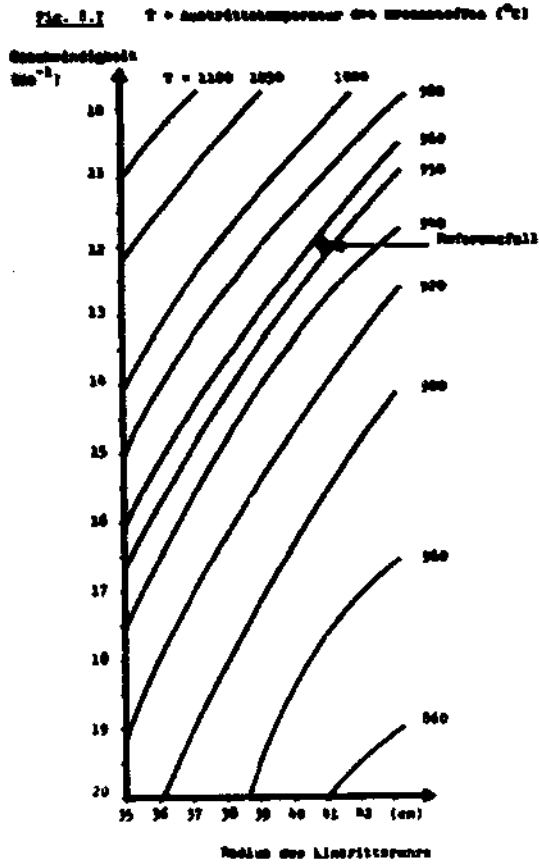

8.4 The external heat exchanger

The most important parameter for the external heat exchanger was selected as the volume of fuel contained in it. The decisive factor is the minimisation of the fuel volume existing outside the core, which influences:

- the effective specific power
(MW(th) per kg fuel in the whole system)
- the effective doubling time
- safety considerations under accident conditions.
- minimisation of the loss of delayed neutrons.

For this reason a simple molten salt/sodium heat exchanger was chosen.

The most important properties of the two media are shown in table 8.3.

The following parameters were arbitrarily chosen

- Velocity of fuel $10-16 \text{ m}\cdot\text{s}^{-1}$
- Velocity of sodium $10-16 \text{ m}\cdot\text{s}^{-1}$
- Inlet temperature of the fuel 950°C
- Fuel outlet temperature 750°C
- Sodium outlet temperature 600°C
- Salt on the tube side dia 0.6 cm
- Sodium on the shell side 0.8/1.2 to 2.2 cm pitch

Important variables

- Inlet sodium temperature
- Length of tubes
- Volume of fuel in the tubes

All these data are given in Fig. 8.10 for the case of a pitch of 1.2 cm.

Table 8.3 Heat Exchanger: 3 GW thermal

Property	Unit	Fuel	
Composition	Mol	1 PuCl ₃ + 2 UCl ₃ + 3.65 NaCl	Sod
Density	gcm ⁻³	3.526 × (1 - 0.001 (T - 850))	0.784 0
Heat Capacity	Jg ⁻¹ K ⁻¹	1.0 × (1.0, 0.0005 (T - 850))	1.256 0
Thermal conductivity	Wcm ⁻¹ K ⁻¹	0.015 × (1 - 0.001 (T - 850))	0.663 0
Viscosity	gcm ⁻¹ s ⁻¹	0.05 × (1 - 0.001 (T - 850))	0.0018 0
Heat transfer coefficient	Wcm ⁻² K ⁻¹	0.023 × RE ^{0.8} × PR ^{0.4}	5.3 + 0. (R'/R'') ^{0.4}
Inlet temperature	°C	750	Variable
Outlet temperature	°C	950	
Inlet velocity	m·s ⁻¹	10 + 16	

For other pitches between 1.2 and 2.2 and for two selected fuel and sodium velocities values can be seen in Fig. 8.11. The reference case was arbitrarily chosen (see Fig. 8.11). The geometry of the heat exchanger for this reference case is shown in Fig. 8.12. Further parameters are summarised in table 8.4.

Table 8.4 Heat Exchanger

Characteristic	Unit	Fuel	Metallic sodium
Inlet velocity	$m \cdot s^{-1}$	14	14
Viscosity	$g \cdot cm^{-1} s^{-1}$	0.0524	0.00183
Heat capacity	$J \cdot g^{-1} K^{-1}$	1.024	1.275
Number of tubes		5787	
Volume	cm^3	1.32×10^6	

The temperature curves for both media are given in Fig. 8.13.

8.5 The internally cooled reactor

This type of reactor, has fuel circulating in the core only, with a relatively low temperature gradient of approx. $35^{\circ}C$ and a high heat capacity, and a high velocity coolant $9m s^{-1}$ with again a low temperature gradient of approx. $43^{\circ}C$ and high heat capacity. This, coupled with the very high negative temperature coefficient of reactivity results in an unusually high negative thermal and 'reactivity' stability.

Decrease of the fuel circulation and/or coolant velocity (in the U-tubes) results in a definite and "automatic" decrease of reactor power without recourse to engineered methods. This points to such a reactor being a surprisingly stable and self regulating device.

The achievement of the required fuel velocity in the core seems to require a forced circulation system since the rough estimate using natural convection gives a heat transfer coefficient which not acceptable.

Such a forced circulation system (core only) can be one of the following types - pump installed directly in the core, pump outside the core, an external pump with injector, a gas lift pump using inert gas. Consideration of the factors involved using criteria such as reduction of the out of core inventory, elimination of additional heat exchangers, minimisation of the fuel leakage, minimisation of the auxiliary power, optimisation of the fuel flow regulation - all point at an in-core pump solution. of course this gives rise to considerable technical problems (cooling of the rotor, corrosion and erosion, maintenance, neutron activation etc).

The calculations for this type of reactor have been based on the following more or less arbitrarily selected parameters:

- fuel on the shell side, with tube pitch to diameter ratio equal to 1.10 to 1.18.
- fuel velocity: 0.5 to 5 $\text{m}\cdot\text{s}^{-1}$
- core dia: 2 and 2.2 m
- core height: 2 m
- coolant in tube with tube internal diameter equal to: 1.0 to 1.5 cm
- velocity of coolant: 1 to 17 $\text{m}\cdot\text{s}^{-1}$
- coolant inlet emperature 750^o and 800^oC

The neutronic calculation and thermo-hydraulics were made for 1 cm of the core height.

The detailed representation for the temperature distribution in a typical power reactor with a core output of 1.936 GW(th) are given in Fig. 8.14 (for a position 43 cm above the bottom of the core where the neutron flux is normalised to 1).

The bulk temperature of the fuel is here 998^oC, the temperature of the tube walls 857 - 389^oC and the bulk temperature of the coolant 781^oC.

For the total output of the core 1.936 GW(th), the power distribution is as shown in Fig. 8.15.

Of course a flatter power distribution could be obtained by adjusting tube deameters and pitch across the core. (Note that in this calculation the radial neutron flux distribution has been taken as unperturbed).

Fig. 8.12 Power distribution inside core

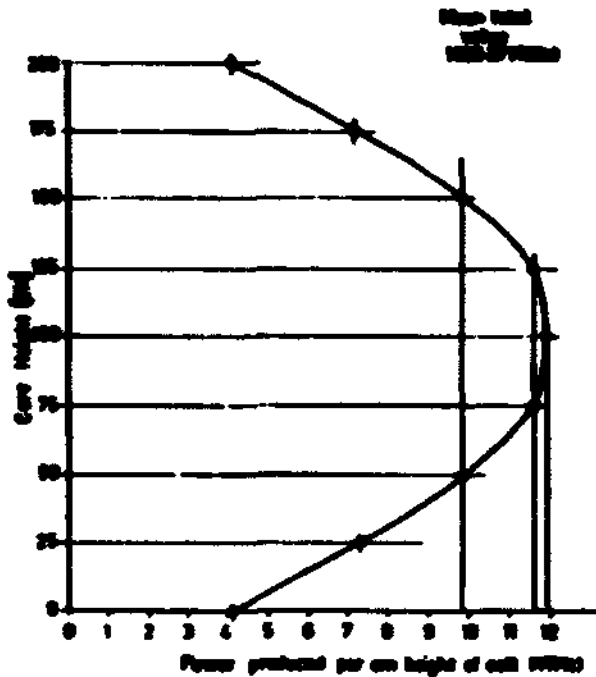


Fig. 8.13 Temperature of fuel and coolant reference core

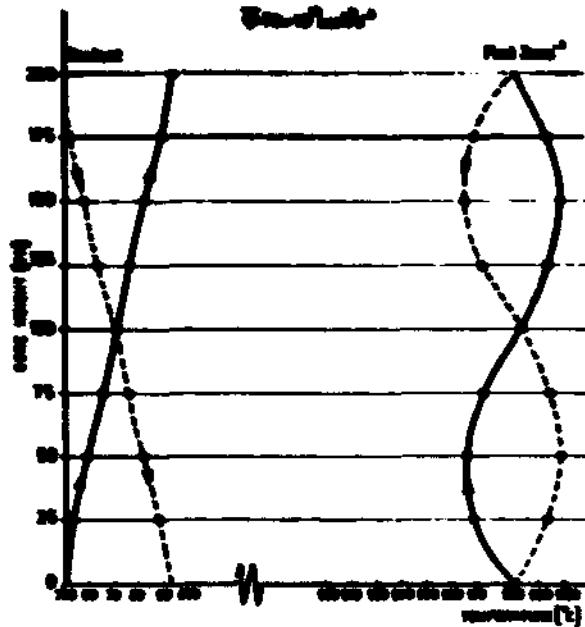


Fig. 8.14 Core power output versus coolant velocity


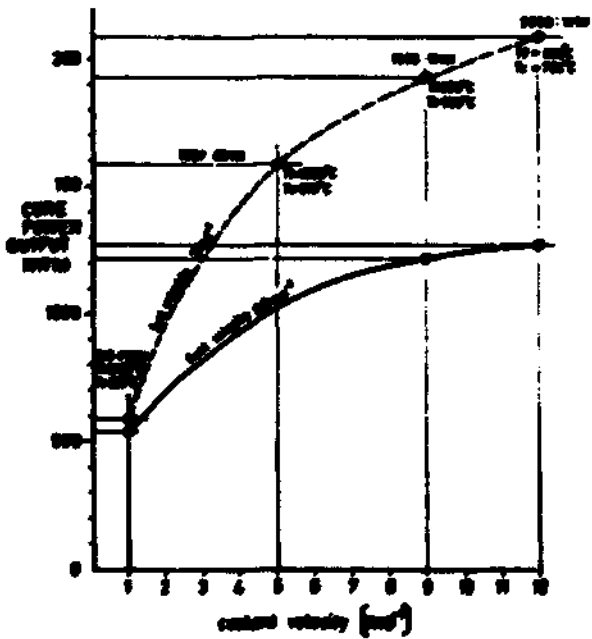


Fig. 8.15 Core power output versus fuel velocity

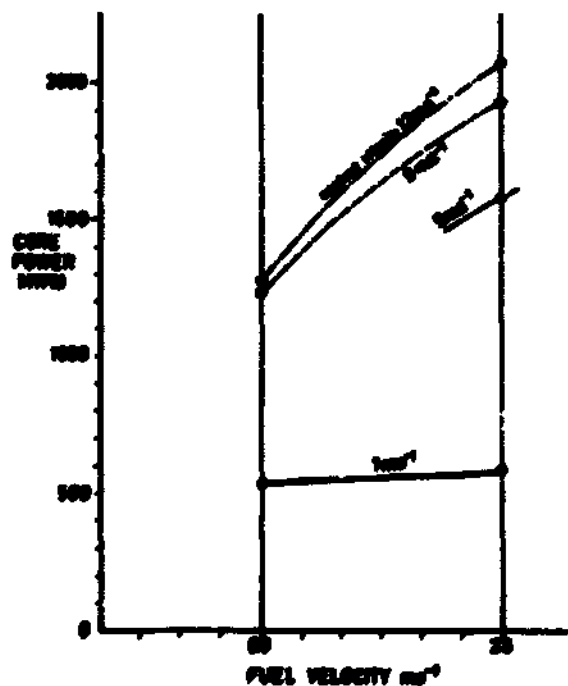

A very encouraging indication of the good temperature distribution with very small temperature gradients is shown in Fig. 8.16 which indicates the axial bulk temperature distribution in the fuel and in the coolant in the core.

The fuel bulk temperature changes from 980°C at the bottom to 965°C at $1/4$ core height and is 998°C at $3/4$ of core height. The coolant temperature lies between 750°C inlet and 793°C outlet. Both these small temperature gradients in the fuel and in the coolant (fertiel material) may prove beneficial in reducing corrosion processes due to the minimizing of mass transport phenomena.

The stable behaviour of this type of reactor results from many parameters. Two of them are the velocity of the coolant and its bulk temperature. The mean power output of the core is strongly dependant on the velocities of both fuel and coolant. Fig. 8.17.

For a fuel velocity of $2 \text{ m}\cdot\text{s}^{-1}$, when the coolant velocity falls from $12 \text{ m}\cdot\text{s}^{-1}$ to $1 \text{ m}\cdot\text{s}^{-1}$ the coolant outlet temperature increases from 784°C to 893°C for constant inlet temperature of 750°C . This change of coolant velocity and its bulk temperature results in the decrease of the mena core output from 2.088 GW(th) to 0.598 GW(th) - that is approximately a factor 3! It is clear since the lower coolant velocity results in a higher coolant outlet temperature and lower power output we have definite negative temperature coefficient (power output) varying with the given coolant velocity.

If the fuel velocity falls from $2 \text{ m}\cdot\text{s}^{-1}$ to $0.8 \text{ m}\cdot\text{s}^{-1}$ we again get an important decrease of power output (see Fig. 8.18). The decrease in both fuel and coolant velocity results in a sharp decrease of reactor power. This means that such a reactor can be considered as a surprisingly stable and self regulating device. In the case of a sudden fall in coolant and/or fuel velocities the power output decreases to a safe level without intervention.

The achievement of the required fuel velocity in the core seems to require a forced circulation system since the rough estimate using natural convection gives a heat transfer coefficient which is too low.

Such a force circulation system (core only) can be one of the following types


- pump installed directly in core
- pump outside the core
- an external pump with injector
- a gas-lift pump using inert gas (argon)

Intensive consideration of the factors involved, using criteria such as - reduction of the out of core inventory, elimination of additional heat exchangers, minimization of the fuel leakage, minimization of the auxiliary power, optimisation of the fuel flow regulation, points to an in-core pump solution. Of course this gives rise to considerable technical problems (cooling of the rotor, corrosion and erosion, maintenance, neutron activation etc.).

The postulated fuel velocity makes it possible to make some calculation of the heat transfer problems and also gives a feel for the kinetics of the reactor under discussion.

It must be stressed that these kinetics studies have no strong physical sense and use an iterative approach but it is clear that they give some useful information about the general reactor stability. (see Fig. 8.19).

FIG. 8.19 Fuel temperature during several passes through core under different initial conditions

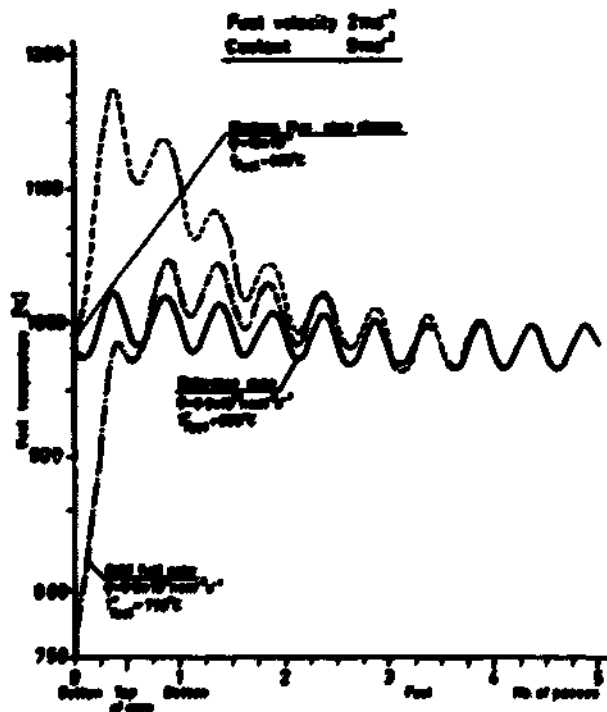

- M. Taube **Steady-state burning of fission products in a fast thermal molten salt breeding power reactor**
Ann. Nucl. Sci. Engin. 1, 283 (1974)
- E. Janovici
M. Taube **Chemical state of sulphur obtained during in pile irradiation**
EIR-Report 267 (1974)
- M. Taube
J. Ligou
E. Ottewitte **A high-flux fast molten salt reactor for the transmutation of Cs-137, Sr-90**
EIR-Report 259 (1975)
- M. Taube
J. Ligou
K.H. Bucher **The transmutation of fission products (Cs-137, Sr-90) in a salt fuelled fast fission reactor with thermal zone**
EIR-Report 270 (1975)
- M. Furrer **Arbeitsvorschrift zur Auftrennung des nach $^{35}\text{Cl}(n,p)^{35}\text{S}$ in NaCl-Proben produzierten Schwefels**
TM-HL-247 (1975)
- M. Taube **Fast breeder power reactor with molten plutonium trif**
TM-HL-259 (1975)
- M. Taube **Breeding in molten salt reactors, lectures on the University of Liege**
EIR-Report 276 (1975)
- E. Janovici
M. Taube **Chemical behaviour of radiosulphur obtained by $^{35}\text{Cl}(n,p)^{35}\text{S}$ during in-pile-irradiation**
J. Nucl. Inorg. Chem. 37, 2561 (1975)

- M. Taube** **Transmutation of Sr-90 and Cs-137 in a high-flux fast reactor with thermalized central region**
Nucl. Sci. Engineer. 61, 212 (1976)
- M. Furrer** **Chemischer Zustand von $^{35}\text{Cl}(n,p)^{35}\text{S}$ in Alkalichloridschmelzen**
EIR-TM-HL-275 (1976)
- M. Furrer** **Chemical behaviour of radiosulphur obtained during in-core irradiation**
J. Inorg. Nucl. Chem. (1977), 39, 1085
- M. Taube** **Is the transmutation of strontium-90 and caesium-137 in a high flux fission reactor feasible?**
In "Long-Life Radionuclide Transformation"
Proceed. OECD, Nuclear Energy Agency
Ispra, 16 March-1977

**9.2 Former publications concerning molten chlorides fast breeders
and the fluoride thermal breeder**

- J.J. Bulmer et al. Fused salt fast breeder
Cf-56-8-204, Oak Ridge 1956
- M. Taube Fused plutonium and uranium chlorides as
nuclear fuel for fast breeder reactors, Symp.
React, Experiment. International Atomic
Energy Agency, Symp. (SM-21/19) Vienna 1961
- M. Taube The concept of salt-boiling fast breeder
A. Kowalew reactor (AlCl₃ as cooling agent)
M. Mielcarski Nukleonika 9-10, 639 (1965)
S. Poturaj
- M. Taube The concept of fast breeder reactor with
M. Mielcarski fused salt and boiling mercury
A. Kowalew Nukleonika 9-10, 641 (1965)
S. Poturaj
- M. Taube Reactivity in salt-boiling reactors
Nukleonika 3, 231 (1967)
- M. Taube Konzeption der Salzsiedereaktoren
A. Kowalew Kernenergie 6, 184 (1967)
S. Poturaj
M. Mielcarski
- M. Taube Fast breeder boiling reactors with fused salts
(in Russian)
Atomnaya Energiya 1, 10 (1967)
- M. Taube New boiling salt fast breeder reactor concepts
M. Mielcarski Nucl. Engin. Design 5, 109 (1967)
S. Poturaj
A. Kowalew

- M. Taube Fast breeder reactor with direct cooling by boiling agents (in Russian)
IBJ-Warszawa, 842/C
Conf. Fast Breeder, USSR, Dubna, December, 1967
- L.G. Alexander Molten Salt Reactors
Proceed. Breeding Large Fast Reactors
ANL-6792 (1963)
- P.A. Nelson
D.K. Butler
M.G. Chasanov
D. Nemeghetti Fuel properties and nuclear performance of fast reactors fuelled with molten chlorides
Nuclear Applications, Vol. 3, 540 (1967)
- B.R. Harder
G. Long
W.P. Stanaway Compatibility and reprocessing in use of molten UCl_3 alkalichlorides mixtures as reactor fuel in "Sympos. Reprocessing Nuclear Fuels"
Ed. P. Chiotti, USAEC, Con. 690801 (1969)
- J.A. Lane Test-reactor perspectives
React. Fuel. Proces. Tech. 12, 1, 1 (1969)
- M.W. Rosenthal
et al. Molten salt reactors: Series of papers
Nucl. Applic. Techn. 8, 2, 105-219 (1970)

9.3 Publications concerning transmutation

- | | |
|--|--|
| M. Steinberg
G. Wotzka
B. Manowitz | Neutron burning of long-lived fission products for waste disposal
BNL-8558 (1964) |
| M.G. Chasanov | Fission-products effects in molten chloride fast reactor fuels
Nucl. Sci. Eng. 23, 189 (1965) |
| M.V. Gregory
M. Steinberg | A nuclear transformation system for disposal of long-lived fission product waste
Brookhaven Nat. Lab. BNL-11915, 1967 |
| W.H. Walker | Fission Products Data, Part I
A.E.C.L. - 3037 (1968) |
| E.A.C. Crouch | Calculated independent yields
AERE-R-6056 (1969) |
| S.M. Feinberg | High flux stationary experimental reactors and their perspectives (in Russian)
Atom. Energ. 29, 3, 162 (1970) |
| R.D. Cheverton
T.M. Sims | H.F.I.R. Core Nuclear Design.
ORNL-4621 (1971) |
| E. Clayton | Thermal capture cross-section
AAEC-TM-619 (1972) |
| H.C. Claiborne | Neutron-induced transmutation of high-level radioactive waste
ORNL-TM-3964 (1972) |

- W.C. Wolkenhauer The controlled thermonuclear reactor as a
fission product burner
BNWL-4232 (1973)
- J.O. Blomeke Managing radioactive wastes
J.P. Nichols Physics Today 8, 36 (1973)
W.C. McClain
- E.A.C. Crouch Fission products chain yields from
experiments
AERE-R-7394 (1973)
- A.S. Kubo Disposal of nuclear waste
O.J. Rose Science 182, 4118, 1205 (1973)
- W.C. Wolkenhauer Transmutation of high-level radioactive
B.K. Leonhard waste with a CTR
B.F. Gore BNWL-1772, Pac. North West Lab. (1973)
- K.J. Schneider Advanced waste management studies, High
level radioactive waste disposal alternatives
USAEC, BNWL-1900, Richland 1974
- T.D. Beynon The nuclear physics of fast reactors
Rep. Prog. Phys. 37, 951 (1974)
- B.F. Gore Transmutation in quantity of Cs-137 in a
B.R. Leonard controlled thermonuclear reactor
Nucl. Sci- Engin. 53, 329 (1974)
- W.F. Vogelsang Transmutations, radioactivity in D-T
R.C. Lott TOKAMAK fusion reactor
G.L. Kulcinski Nucl. Technology 22, 379 (1974)
T.Y. Sung
- H. Wild Radioaktive Inventare und deren zeitlicher
Verlauf nach Abschalten des Reaktors
KfK-1797, Kernforschungszentrum Karlsruhe, 1974

9.4 Publications concerning the thorium fuel cycle

- A.I. Lejpunskii Feasability of using thorium in fast power
O.D. Kazachkovski reactors
S.B. Shikhov Atomnaya Energiya, 10, 4, 342 (1965)
V.M. Murogov
- C.A. Renni Selfsustaining mixed fast and thermal
 reactor system
 D.P. Report 581, AEE Winfrith, 1967
- ASH-1097 The use of thorium in nuclear power reactors
 USAEC 1969
- Thorium fuel cycle
 Bibl. Series No. 39
 Int. Atom Energy Agency, Vienna 1970
- P. Fortescue A reactor strategy FBR's and HTGR's
 Nuclear News, April 1972
- G. Grazianni Plutonium as a make up in the thorium
C. Rinaldini integral block HTR fuel element
H. Bairiot Eur 5020e Joint Nuclear Research Centre
E. Tranwaert Ispra 1973
- R.H. Brogli Thorium utilization in an FBR/HTGR power
K.R. Schulz system
 34 LC 3730 1973 / 74

- D. Broda **Eine Welt aus Plutonium?**
Naturwiss. Rundschau, 28, 7, 233 (1975)
- **Can we live with plutonium?**
Some articles: Now Scientist, 29 May 1975
- P.J. Wood **The economics of thorium blankets for FBR**
J.M. Driscoll Proceed ANS 1975 June
- B.R. Seghal **Thorium-based fuels in FBR**
C. Lin Proceed ANS June 1975
J. Naser
W.B. Löwenstein
- E.R. Merz **Thorium fuel cycle**
Inter. Conf. Nucl. Power, Fuel Cycle
IAEA, Salzburg, May 1977, CN - 36/96
- P.T. Kasten **Evaluation of Pu, U and Th use in power**
F.J. Homan **reactor fuel cycle**
Inter. Conf. Nucl. Power, Fuel Cycle
IAEA, Salzburg, May 1977, CN-36/402

9.5 References to the chemical experiments

M. Kasrai J. Chem. Soc. A, 1105 (1970)
A.G. Maddock

C.N. Turcani Radiochem. Radioanal. Lett. 5, 287 (1970)

J.L. Baptista J. Inorg. Nucl. Chem. 36, 1683 (1974)
N.S.S. Maques

9.6 References to the physics calculation

A.M. Weinberg The Physical Theory of Neutron Chain
E.P. Wigner VI p.143. Univ. Chic. Press (1958)

L.W. Nordheim A Program of research and calculations of
 resonance absorption
 - GA - 2527, (1961)

I.J. Bodarenko Group constants for nuclear reactor
et al. Calculations (1964)

J. Adir et al. User's and Programmer's Manual for the GGC 3
 Multigroup Cross-Section Code - Part 1,
 GA 7157 (1967)

- G.I. Bell
S. Glasstone Nuclear Reactor Theory. Van Nostrand
Reinhold Comp. (1970) 244 - 247
- G.A. Ducat
M.J. Driscoll
N.E. Tudreas Evaluation of the parfait blanket concept
for fast breeder reactor
M.I.T. Cambridge, MITNE-157 (1974)
- R.W. Hardie
W.W. Little
R.P. Omberg A Comprehensive expression for the doubling
time of fast breeder reactors
Nuclear Technology, 26, 115 (1975)