


AN ESSENTIAL ITEM

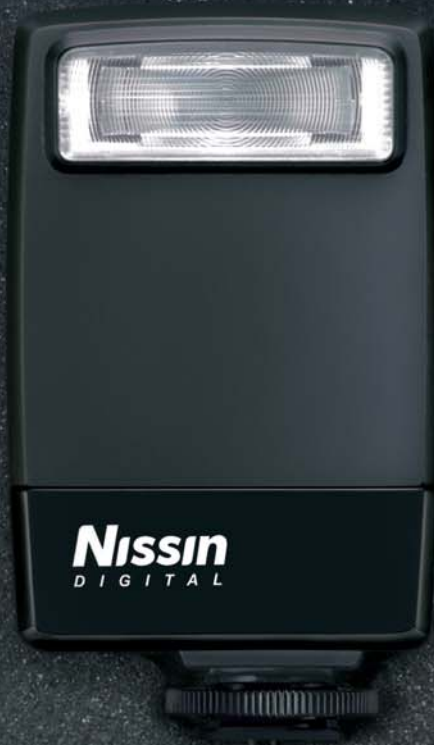

DO NOT LEAVE A FLASH!

A compact flash with TTL compensation system

SPEEDLITE
Di28

Digital TTL metering
Guide Number 20 (ISO 100)
Light covers digital 18mm lens



- For Canon's E-TTL, and Nikon's i-TTL flash system
- A single button for multiple function
- Flash's TTL compensation creates more live image
- Wide angle diffuser for digital 14mm lens detachable
- A stylish, pocket-sized, light weight

THE SUN IN YOUR POCKET


Portable size - You can carry it with you at all times. Enough power- It gives two times power of your camera's built-in flash.



ONE SETS ALL

Power on, off and selecting TTL flash compensation (*) by one push-button. Pilot lamp turns its color to tell you the power level you desire. Clip, set power, and it just follow what your camera commands.

| Power button | Compensation | Pilot Lamp color |
|-----------------|--------------|------------------|
| 3 sec. to on | ±0EV | Green(Default) |
| short press 1st | -0.5EV | Blue |
| short press 2nd | -1.0EV | Blue-blink |
| short press 3rd | +0.5EV | Red |
| short press 4th | +1.0EV | Red-blink |
| short press 5th | ±0EV | Green(Default) |



* Refer to the following section "TTL FLASH COMPENSATION"

SNAPSHOTS EVERYWHERE

Slip it in your pocket, and you don't miss its moment. A more creative image for impressive memory.



SPECIFICATION

| | Canon digital Cameras | Nikon digital cameras |
|------------------------|---|--|
| Usable Camera | EOS 300D, 350D, 400D, Digital Rebel XT, Digital Rebel XTi, 10D, 20D, 30D, 40D, 5D, 1D, 1Ds, 1D MarkII, 1Ds MarkII, 1D MarkIIN Powershot G7, G9, S5 IS | D40, D40x, D50, D70, D70s, D80, D200, D2Xs, D2X, D2Hs, D2H, Coolpix P5000, Fuji FinePix S5 Pro |
| Guide No. | Guide No.20(ISO 100), 28(ISO 200) | |
| Angle of Illumination | 28mm (20mm with diffuser) | |
| Power Source | 2 x LR03 or equivalent Ni-MH, Oxiryd, Lythium | |
| Number of flashes | 70~1500 flashes (Alkaline batteries) | |
| Energy saving circuit | In 2 min. to stand-by mode, and reset by touching any button or camera's shutter. In 30 min. to switch the unit off | |
| Recycling time | 0.2~5.5 sec. (Alkaline batteries) | |
| TTL system | ETTLII, E TTL | iTTL |
| TTL flash compensation | 5 mode (TTL±0ev, TTL-0.5ev, TTL-1.0ev, TTL+0.5ev, TTL+1.0ev) | |
| Color temperature | 5600 K° approx. | |
| Flash duration | 1/1500~1/20,000 (controlled flash) sec. | |
| Dimensions | 58(W)x37(D)x92(H)mm | |
| Weight | 100gr. Without battery | |
| Accessory | Wide Angle Diffuser, Pouch | |

*Design and specifications are subject to change without notice.

• Snap shooter



A stylist sits on SLR

• One sets all



All function by one button

• Wide Angle Diffuser




Diffusing the light to soften the power

TTL FLASH COMPENSATION

To sharpen or brighten the subject image without phasing the tone down of background, use TTL flash compensation system. Di28 can control TTL flash power for ±1.0ev. by 0.5ev. steps.

A difference between TTL flash compensation and camera's EV compensation

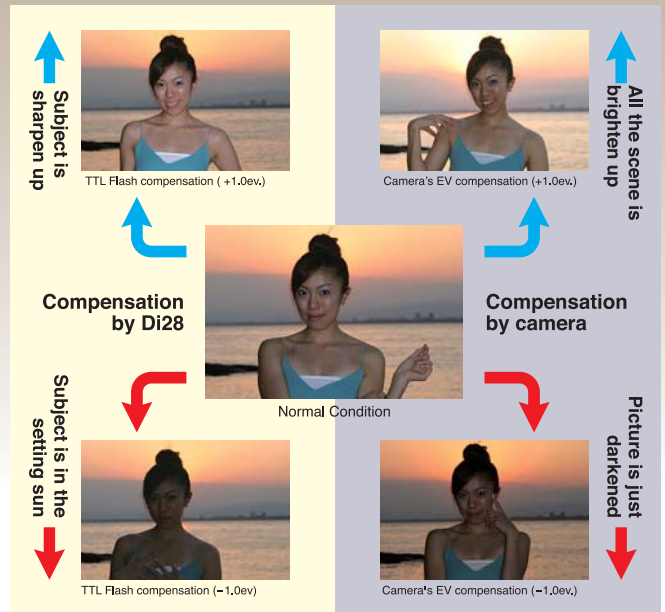

JOY OF FLASH PHOTOGRAPHY

Slow shutter synchronizing shot.

Slow shutter plus flash light creates the image of moment as it stands. It is just like that human eye images subject and back scene balanced. The slow shutter synchronizing shot is one of the most popular and easiest technology of flash photography. Keep flash always with your camera, and you will dress up the snapshot.



Flash shot with slow shutter speed



Camera's auto flash mode picture