

Understanding the Contributing Factors to Nighttime Crashes at Freeway Mainline Segments

Hongyun Chen, Kristiansson Fanny

Department of Civil Engineering, Embry-Riddle Aeronautical University, Daytona Beach, FL, USA

Email: Hongyun.chen@erau.edu

How to cite this paper: Chen, H.Y. and Fanny, K. (2019) Understanding the Contributing Factors to Nighttime Crashes at Freeway Mainline Segments. *Journal of Transportation Technologies*, 9, 450-461. <https://doi.org/10.4236/jtts.2019.94028>

Received: May 10, 2019

Accepted: September 24, 2019

Published: September 27, 2019

Copyright © 2019 by author(s) and Scientific Research Publishing Inc.

This work is licensed under the Creative Commons Attribution International License (CC BY 4.0).

<http://creativecommons.org/licenses/by/4.0/>



Open Access

Abstract

This study investigated the crash contributing factors to the injury outcomes and the characteristics of the night time crashes at freeway mainline segments. Multinomial logit model (MNL) was selected to estimate the explanatory variables at a 95% confidence level. The six-year crash data (2005-2010) were obtained in the State of Florida, USA and five injury level outcomes, no injury, possible injury, non-incapacitating injury, incapacitating injury, and fatal injury, were considered. The no injury level was selected as the baseline category.

Keywords

Contributing Factors, Nighttime Crash, Injury Severity, Freeway Mainline

1. Introduction

Driving during nighttime tends to be riskier than day time [1]. Though vehicles travelling at night is about 25 percent of the total traffic, the nighttime crash rate remains high in the past decades, in general approximately 1.6 times of the daytime rate [2]. Additionally, the fatality rate of nighttime crash is much higher than the day time's rate. In 2011, 13,861 fatal crashes were occurred nighttime, which accounted for almost half of the fatal crashes in the US. Even though the fatality rate decreases by 1.8 percent from 2010 to 2011, the fatal crashes increased by 0.5 percent.

Figure 1 compares the five injury outcomes, no injury, possible injury, non-incapacitating injury, incapacitating injury, and fatal injury, in the State of Florida, USA from the year 2005 to 2010. Not only the fatal injury, but the also the percentages of incapacitating injury, and non-incapacitating injury are higher

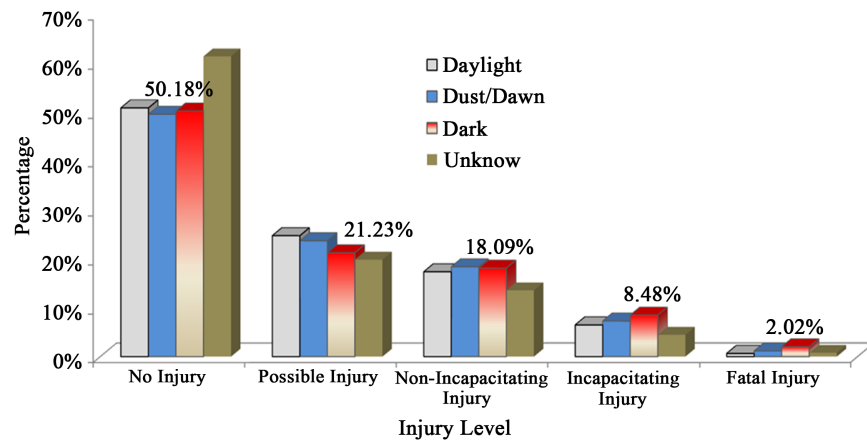


Figure 1. Percentage of crash injury levels under different lighting conditions from 2005-2010.

at the night time than those during the day time and dust/dawn conditions. The facts indicate there is a need to better understand the contributing factors to those night time crashes, and crash characteristics.

Few studies have focused on the night time crashes and most of them concentrated on demonstrating the benefit of using street lights to reduce night time crashes. Hawkins *et al.* [2] modeled the crashes with the presence of lighting and absence of lighting at 233 rural unsignalized intersections and found the locations without lighting had twice as many as crashes as locations with lighting. Elvik [3] compared the results from 37 studies of safety effects of public lighting and found that lightning reduces night time fatal accidents by 65 percent while 15 percent reduction for property damage only (PDO) crashes. However, a study conducted by Griffith [4] compared the night time crashes on a 55-mile long urban freeway segment with continuous lighting and a 36 mile without lighting. It only found the significant difference for PDO crash rates, which is 19 percent higher at those without street lighting.

These studies were conducted about 15 to 20 years ago while the sample sizes were limited, and detailed levels of crash information might not be available at that time which could significantly lead to the bias in the estimation.

Nighttime crashes appear more complicated than the day time crashes. The purpose of this study is to investigate the crash contributing factors to the injury outcomes and the characteristics of the night time crashes at freeway mainline segments. The findings from this study could help the engineers and researchers to further select the effective countermeasures or policies to effectively reduce the night time crashes, especially the injury severity levels.

2. Methodology

Many statistical models have been applied to model injury severity levels. Multinomial logit model (MNL) and ordered probit model are the two commonly used ones [5] [6] [7] [8]. The benefit of using MNL is that each injury outcome has an individual function while the ordered model has the same coefficient of

the same variable for the injury outcomes. It is likely that the ordered model might overestimate the probability of the high injury level while underestimates the low injury level [7]. Moreover, the same variable might significantly impact one injury level and not the other one. MNL is more flexible and suitable in this study. Each injury MNL could have different variables and coefficients which can distinguish the efforts of same variables on the different injury levels. Thus, the MNL in this study estimated the crash injury outcomes by different explanatory variables.

Assuming there are m possible severity injury outcomes ($m = 5$, no injury, possible injury, non-incapacitating injury, incapacitating injury, and fatal injury), the MNL model has a function for each injury outcome in the following equation [5] [9]:

$$Y_{ik} = \alpha_k + \beta_k X_{ik} + \varepsilon_{ik}, \quad i = 1, \dots, n; k = 1, \dots, m \quad (1)$$

where n is the number of total crashes; Y_{ik} is the severity function for the k th possible injury outcome of the i th crash; α_k is an intercept parameter for the severity injury outcome k ; X_{ik} is a vector of explanatory variables of crash i in the injury outcome k ; β_k is a vector of coefficients to be estimated; and ε_{ik} is an random error term following the Type I [10] distribution. The no injury outcome was used as the baseline category. Let $P_i(k)$ represent the probability of the crash i in the severity injury outcome k , then the probability is:

$$P_i(k | \beta) = \frac{\exp(\alpha_k + \beta_k X_{ik} + \varepsilon_{ik})}{\sum_{k=1}^m \exp(\alpha_m + \beta_m X_{im} + \varepsilon_{im})} \quad (2)$$

The following equation determines the odds ratio (OR) or relative risk by using the estimated coefficients.

$$\text{OR}_{j_k} = \exp(\beta_{j_k}), \quad j_k = 1, \dots, u_k \quad (3)$$

where j_k is the explanatory variable in the injury outcome k model and u_k is the total number of significant explanatory variables which vary in different injury outcome models. The OR indicates the probability of choosing one outcome category over the probability of choosing the baseline category (no injury outcome) for one specific explanatory variable while others hold constant. If OR is larger than 1, it is likely to increase the injury level outcome k ; if OR is smaller than 1, the injury level is likely to decrease the outcome k .

Two parameters are used to evaluate the goodness-of-fit of the MNL, Akaike's information criterion (AIC), and likelihood ratio. The model with the smaller AIC is considered the better-fitting model. The confidence level is 95% for the explanatory variables.

3. Data Collection

The six-year crash data (2005 to 2010) were obtained from Florida Crash Annual Report (CAR) System. The CAR system contains a variety of information including driver conditions, vehicle conditions, roadway environmental conditions

and crash conditions. After cleaning these data with missing codes, a total of 45,798 crashes were occurred at the freeways.

Twenty-eight variables were initially selected and described in **Table 1**, included one categorical variable, twenty-one dummy variables and five continuous variables. Five injury level outcomes were coded from 1 to 5. The roadway conditions include the area types (rural/urban), the road surface condition (dry/wet), the type of road (divided/not divided), the road condition (defect/no defect), the road shoulder width (ft), AADT (average annual daily traffic) in thousand, the percentage of heavy truck, maximal post speed limit, lighting conditions (light/no light), and weather conditions (rain/fog).

Crash conditions include the crash types defined by the first harmful events (rear-end, head-on, angle, left-turn, right-turn, sideswipe, and collisions with fixed objects), vehicle type (single vehicle or multi-vehicles), safety equipment used when crash occurred, and vision blockage when crash occurred. Driver information includes age, alcohol and/or drug involved when crash occurred. Vehicle information contains the type of vehicle involved in the crash (auto/van, truck/bus, or bike).

4. Data Analysis

1) Multinomial Model Result

Table 2 lists the final model results with the explanatory variables at a 5% significant level. Five injury outcomes were used and the baseline category is no injury. The variable, fog, is not significant. It is possible that the sample sizes of crashes during fog was relatively small, ranging from 0.5% to 1.3% of the total crashes. The road defect is also not significant for the injury outcomes which indicate the variable associated with the number of the crashes but not contributed to injury outcomes. Automobile and truck are found to be less likely involved in four injury levels.

As listed in **Table 2**, twenty-three variables out of twenty-eight are significant for most of the injury outcomes. Area type is only significant for the incapacitating and fatal injury outcomes. Crashes occur at rural freeways areas are likely to be involved in severe injury levels. Similar to post speed limit, the higher speed limit, the likelihood of severe crashes could occur. AADT is only significant for the possible injury and fatal injury.

One important finding is that increasing the percentage of heavy truck significantly increases the possibility of night fatal crashes. Drivers under drugs or alcohol influenced are more likely to involve in injury crashes except the possible injury. The negative signs for the variable lighting indicate that installing street light could significantly reduce the incapacitating and fatal injury during night time. Vision blocked only significant for possible and non-incapacitating injury and single vehicle crashes are likely for drivers to be involved in higher injury levels at freeway segment. Drivers involving in rear-end, head-on, angle, and left-turn crashes are likely to have severe injuries.

Table 1. Selected explanatory variables.

Type	Variable	Value	Description	Freeway	
				Count	Percent
Categorical	Injury Level	1	No Injury	20,655	45.1%
		2	Possible Injury	11,552	25.2%
		3	Non-Incapacitating Injury	8864	19.4%
		4	Incapacitating Injury	4055	8.9%
		5	Fatal Injury	672	1.5%
	Area	1	Rural	5009	10.9%
		0	Urban	40,789	89.1%
	Alcohol Drug	1	Alcohol or Drug Influenced	7297	15.9%
		0	No Alcohol or Drug Influenced	38,501	84.1%
	Light	1	Street Light	28,355	61.9%
		0	No Street Light	12,434	27.1%
	Rain	1	If it was raining	6821	14.9%
		0	Otherwise	38,977	85.1%
	Fog	1	If it was foggy	297	0.6%
		0	Otherwise	45,501	99.4%
	Road Wet	1	If crash was on the wet or slippery road	10,689	23.3%
		0	Otherwise	35,109	76.7%
	Divided	1	If the road is divided	39,267	85.7%
		0	Otherwise	6531	14.3%
	Road Defect	1	If the road has defect	3039	6.6%
0		Otherwise	42,759	93.4%	
Vision Not Block	1	If vision is not blocked	43,590	95.2%	
	0	If vision is blocked	2208	4.8%	
Dummy	Single_Vehicle	1	Single Vehicle Crash	14,149	30.9%
		0	Multi Vehicles Crash	31,649	69.1%
	Rear end	1	If 1st harmful event is reared	14,707	32.1%
		0	Otherwise	31,091	67.9%
	Head On	1	If 1st harmful event is head-on	942	2.1%
		0	Otherwise	44,856	97.9%
	Angle	1	If 1st harmful event is angle	5800	12.7%
		0	Otherwise	39,998	87.3%
	Left Turn	1	If 1st harmful event is left turn	1699	3.7%
		0	Otherwise	44,099	96.3%
	Right Turn	1	If 1st harmful event is right turn	265	0.6%
		0	Otherwise	45,533	99.4%
	Side Swipe	1	If 1st harmful event is sideswipe	4440	9.7%
		0	Otherwise	41,358	90.3%
	Fixed Object	1	If 1st harmful event is collision with fixed	10,658	23.3%
		0	Otherwise	35,140	76.7%
	Automobile	1	If crash involved in auto	33,776	73.7%
		0	Otherwise	12,022	26.3%
	Truck Bus	1	If crash involved in truck or bus	11,015	24.1%
		0	Otherwise	34,783	75.9%

Continued

	Bike	1	If crash involved in bike	130	0.3%
		0	Otherwise	45,668	99.7%
	No Safety Protection	1	If safety equipment is not used	3957	8.6%
		0	Otherwise	41,841	91.4%
	Should Width		Road Shoulder Width (ft)	0 - 98	
	AADT		Average Annual Daily Traffic in Thousand	4.50 - 328	
Continuous	Truck Factor		Percent of heavy truck (%)	0 - 53	
	Post Speed		Posted speed limit (mph)	45 - 70	
	Age		Driver age (year)	15 - 109	

Table 2. Multinomial Logit model result.

Model Fit Statistics												
Observations	45,798		Test				Chi-Square			Pr > χ^2		
AIC	113780.3		Likelihood Ratio				5585.886			<0.0001		
Model Analysis												
Parameter	Possible Injury			Non-Incapacitating Injury			Incapacitating Injury			Fatal Injury		
	Coef.	Std. Error	Pr > χ^2	Coef.	Std. Error	Pr > χ^2	Coef.	Std. Error	Pr > χ^2	Coef.	Std. Error	Pr > χ^2
Intercept	0.00	0.19	0.98	0.83	0.18	<0.0001	-0.69	0.22	0.00	-4.42	0.50	<0.0001
Area	-	-	-	-	-	-	0.27	0.06	<0.0001	0.21	0.13	0.11
Should Width	-	-	-	-	-	-	0.03	0.01	0.00	0.09	0.02	<0.0001
AADT	0.002	0.000	<0.0001	-	-	-	-	-	-	0.002	0.001	0.024
Truck Factor	-	-	-	-	-	-	-	-	-	0.02	0.01	0.03
Post Speed	-	-	-	0.01	0.00	<0.0001	0.03	0.00	<0.0001	0.03	0.01	<0.0001
Alcohol Drug	-0.17	0.03	<0.0001	0.11	0.04	0.00	0.11	0.05	0.02	1.33	0.09	<0.0001
Lighting	-	-	-	-	-	-	-0.15	0.05	0.00	-0.39	0.11	0.00
Rain	-	-	-	-0.28	0.06	<0.0001	-0.19	0.08	0.02	-	-	-
Road Wet	0.09	0.04	0.02	-	-	-	-0.18	0.07	0.01	-	-	-
Divided	0.08	0.04	0.02	0.11	0.04	0.01	-	-	-	0.82	0.19	<0.0001
Vision Block	-0.12	0.06	0.04	-0.22	0.07	0.00	-	-	-	-	-	-
Single Vehicle	0.40	0.07	<0.0001	0.61	0.07	<0.0001	0.60	0.08	<0.0001	0.37	0.16	0.02
Rear End	0.66	0.05	<0.0001	0.24	0.05	<0.0001	-	-	-	-	-	-
Head On	0.72	0.09	<0.0001	0.77	0.10	<0.0001	0.95	0.13	<0.0001	1.17	0.25	<0.0001
Angle	0.51	0.06	<0.0001	0.63	0.06	<0.0001	0.57	0.08	<0.0001	-	-	-
Left Turn	0.79	0.08	<0.0001	0.96	0.08	<0.0001	1.13	0.11	<0.0001	-	-	-
Right Turn	-	-	-	-0.48	0.21	0.02	-0.83	0.37	0.03	-	-	-
SideSwipe	-0.28	0.06	<0.0001	-0.59	0.07	<0.0001	-0.89	0.10	<0.0001	-2.01	0.27	<0.0001
Fixed Object	-0.23	0.06	<0.0001	-0.41	0.05	<0.0001	-0.47	0.06	<0.0001	-0.63	0.13	<0.0001
Automobile	-1.05	0.16	<0.0001	-2.46	0.13	<0.0001	-3.13	0.14	<0.0001	-3.57	0.19	<0.0001
Truck Bus	-1.23	0.16	<0.0001	-2.64	0.14	<0.0001	-3.17	0.14	<0.0001	-3.42	0.20	<0.0001
Bike	1.34	0.43	0.00	-	-	-	-	-	-	-	-	-
No Safety Protection	-0.13	0.05	0.01	0.40	0.05	<0.0001	1.04	0.05	<0.0001	2.09	0.09	<0.0001
Age	-0.003	0.001	<0.0001	-0.004	0.001	<0.0001	-0.003	0.001	0.034	-	-	-

On the contrary, sideswipe and collisions with fixed objects are less likely for the drivers of being involved in the injury outcomes. For the vehicle type, crashes with bikes involved are found to be significant likely to involve in possible injury. It is intuitive that not using safety equipment (seat belt, air bag, helmet, etc.) during the crash significantly increases the possibility of non-incapacitating injury, incapacitating injury, and fatal injury. The finding suggests that the using these safety protections is extremely important to reduce the injury levels, especially the fatal injury at night.

The result for the variable, age, is counter-intuitive. Younger drivers tend to be more likely involved in non-fatal injuries. This finding is quite different from the previous study [5]. It might be reason that the high percentages of young drivers are alcohol or drug involved during the night time. During the night time, drivers are likely to operate at a relatively high speed, younger drivers are easily get distracted and have less driving experience compared to senior drivers. Thus, a more severe consequence might occur at night.

The signs for the four variables, shoulder width, rain, wet, and divided, are a little counter intuitive. For shoulder width on the right side, it could be a variable associated with road type, while the road shoulder is generally wider in the rural area than the urban area where severe injury levels are likely to occur. When it was raining or the road condition is wet, drivers are less likely to involve in incapacitating injury. The probable reason could be the driver behavior when drivers might be more cautious if it was raining or the road was wet. It might also correlate with the traveling speed, drivers usually travel at a relatively lower speed during these conditions which are associated with less severe injury outcomes.

The positive sign for the divided indicate the divided construction in the median are likely for drivers of being possible injury, non-incapacitating injury and fatal injury compared to when the median is open to grass. It is possibility that drivers could operate or take evasive maneuvers during a crash in a median without barrel or divided construction.

2) Analysis of Odds Ratios

The odds ratios were computed for each significant explanatory variable, as listed in **Table 3**. The ratios represent the probability of one injury outcome over the probability of the base injury outcome (no injury) for increasing one unit of an explanatory variable while others hold constant. If OR is greater than 1, it is likely increasing the probabilities of injury outcomes; if OR is less than 1, it is likely to decrease the probabilities of the injury outcomes. For example, the probability of being in a fatal injury from urban to rural area is 1.23 times as no injury for freeways. The odds ratios for posted speed limit are larger than one which indicates the higher post speed limits slightly increase the injury outcomes at the freeway segments.

AADT has a slight impact on the injury outcomes only at freeway. One thousand vehicles increasing result in 1.002 times the probability of fatal injury at freeway as no injury outcome. Drivers under alcohol or drug influenced are

Table 3. Calculated odds ratio for injury levels vs. no injury.

Parameter	Injury Levels	Ratio
Shoulder Width	Incapacitating Injury	1.307
	Fatal Injury	1.230
	Incapacitating Injury	1.026
	Fatal Injury	1.090
	Possible Injury	1.002
	Fatal Injury	1.002
AADT	Fatal Injury	1.020
	Non Incapacitating Injury	1.013
	Incapacitating Injury	1.029
	Fatal Injury	1.032
	Possible Injury	0.845
	Non Incapacitating Injury	1.113
Alcohol Drug	Incapacitating Injury	1.114
	Fatal Injury	3.770
	Incapacitating Injury	0.864
	Fatal Injury	0.676
	Non Incapacitating Injury	0.753
	Incapacitating Injury	0.823
Road Wet	Possible Injury	1.099
	Incapacitating Injury	0.832
	Possible Injury	1.088
Divided	Non Incapacitating Injury	1.117
	Fatal Injury	2.281
Vision Block	Possible Injury	0.885
	Non Incapacitating Injury	0.804
	Possible Injury	1.489
Single Vehicle	Non Incapacitating Injury	1.839
	Incapacitating Injury	1.821
	Fatal Injury	1.441
Rear end	Possible Injury	1.931
	Non Incapacitating Injury	1.277
	Possible Injury	2.048
Head On	Non Incapacitating Injury	2.156
	Incapacitating Injury	2.595
	Fatal Injury	3.227
Angle	Possible Injury	1.661
	Non Incapacitating Injury	1.878
	Incapacitating Injury	1.770

Continued

	Possible Injury	2.201
Left Turn	Non Incapacitating Injury	2.606
	Incapacitating Injury	3.105
	Fatal Injury	1.231
Right Turn	Possible Injury	0.893
	Non Incapacitating Injury	0.622
	Incapacitating Injury	0.438
	Fatal Injury	<0.001
Side Swipe	Possible Injury	0.758
	Non Incapacitating Injury	0.554
	Incapacitating Injury	0.412
Fixed Object	Fatal Injury	0.135
	Possible Injury	0.795
	Non Incapacitating Injury	0.667
	Incapacitating Injury	0.625
Automobile	Fatal Injury	0.531
	Possible Injury	0.349
	Non Incapacitating Injury	0.086
	Incapacitating Injury	0.044
Truck Bus	Fatal Injury	0.028
	Possible Injury	0.293
	Non Incapacitating Injury	0.072
	Incapacitating Injury	0.042
Bike	Fatal Injury	0.033
	Possible Injury	3.811
No Safety Protection	Possible Injury	0.879
	Non Incapacitating Injury	1.493
	Incapacitating Injury	2.832
	Fatal Injury	8.118
Age	Possible Injury	0.997
	Non Incapacitating Injury	0.996
	Incapacitating Injury	0.997

found more likely to be killed, up to 3.77 times at freeways compared to no alcohol or drug influenced. The ORs for lighting are smaller than 1.0. The results suggest the having street lights could reduce the relative risk of being in incapacitating injury and fatal injury. The probabilities decreased to 0.7 times for the probability of being killed at freeways as the probability of no injury.

5. Conclusions

This study investigated the crash contributing factors to the injury outcomes and the characteristics of the night time crashes at freeways mainline sections. The multinomial logit model was developed to estimate the contributing factors, including driver conditions, geometric conditions, vehicle conditions, crash conditions, and environmental conditions, to different injury outcomes for night time crashes. The six-year crash data (2005-2010) were obtained from Florida Crash Annual Report (CAR) System. The data were divided into five datasets based on the five identified locations. Five injury level outcomes, no injury, possible injury, non-incapacitating injury, incapacitating injury, and fatal injury, were considered. The no injury was selected as the baseline category. A total of 45,798 crashes were observed at freeways.

Nighttime crashes at rural areas are likely to be involved in incapacitating injury and fatal injury. AADT is only significant for the possible injury and fatal injury. Vision blocked only significant for possible and non-incapacitating injury. Drivers involving in rear-end, head-on, angle, and left-turn crashes are likely to suffer in severe injuries. Younger drivers tend to be involved in more non-fatal injuries. It might be contributed by many young drivers during the night time.

When it was raining or the road condition was wet, drivers are less likely to involve in incapacitating injury. The presence of the divided constructions in the median is likely for drivers of being possible injury, non-incapacitating injury and fatal injury compared to when the median is open to grass. For shoulder width on the right side, it could be a variable associated with road type and driver behavior, while the road shoulder is generally wider in the rural area than the urban area where high injury level is likely to occur.

The probability of being in a fatal injury from urban to rural area is 1.23 times as no injury for freeways. Drivers under alcohol or drug influenced are found more likely to be killed, up to 3.77 times at freeways. The probabilities of having street lights decreased to 0.7 times for fatal crashes at freeways to the probability of no injury. Head-on, angle, left-turn crashes are relatively high risky crash types, ranging from 2 to 18 times of the probability of severe injury outcomes (non-incapacitating injury, incapacitating injury, and fatal injury) while right-turn, and sideswipe have lower risks ranging from 0.001 to 0.9 times to the no injury.

Having safety protection equipment is a key factor to reduce the injury outcomes. For fatal injury only, it increases the probability up to 8 times at freeway, when no safety equipment was used compared to the protection equipment used. Drivers involving in single vehicle crashes are more likely to be killed which is 1.4 times at freeway segment. Younger people are more likely to increase the probability of being non-fatal injury at freeways.

One interesting finding is divided that highways are more likely to involve in fatal crashes. Drivers being killed are 2.28 times at freeways than being involved in no injury crashes. This variable might correlate with other factors, like higher

operating speeds, less cautious and more distracted at divided highways compared to undivided ones.

The method can be applied to other types of road conditions, ramps, intersections, major and minor arterials, etc. The findings from this study could help the engineers and researchers to further select the effective countermeasures or policies to potentially reduce the night time crashes, especially the injury severity levels.

The authors suggest more efforts should be made to increase the using of safety equipment, e.g. safety belt, air bag, helmet, at night which could significantly reduce the possibilities of injury outcomes, especially fatal injury levels. Efforts on awareness of risks of speeding, alcohol, or drug impacts, is also strongly recommended. Installation of street light is the most effective way to reduce the injury outcomes. Young drivers should be aware of the risk of driving at freeway. Further investigations on these divided highways are strongly recommended to find the possible reasons of high probability of injury outcomes compared to not divided highways.

Conflicts of Interest

The authors declare no conflicts of interest regarding the publication of this paper.

References

- [1] National Highway Traffic Safety Association (NHTSA) (2007) Passenger Vehicle Occupant Fatalities by Day and Night—A Contrast. Washington DC.
- [2] Hawkins, N., Hallmark, S., Smadi, O., Kinsenzaw, C., Orellana, M., Hans, Z. and Isebrands, H. (2008) Strategies to Address Nighttime Crashes at Rural, Unsignalized Intersections. Final Report, Center for Transportation Research and Education, Iowa State University, Ames.
- [3] Elvik, R. (1997) Meta-Analysis of Evaluations of Public Lighting as Accident Countermeasure. *Transportation Research Record*, **1485**, 112-123.
- [4] Griffith, S.M. (1994) Comparison of the Safety of Lighting Options on Urban Freeways. *Public Roads*, **58**, 8-15.
- [5] Ye, F. and Lord, D. (2014) Comparing Three Commonly Used Crash Severity Models on Sample Size Requirements: Multinomial Logit, Ordred Probit and Mixed Logit Models. *Analytic Methods in Accident Research*, **1**, 72-85.
- [6] Xie, Y., Zhao, K. and Huynh, N. (2012) Analysis of Driver Injury Severity in Rural Single-Vehicle Crashes. *Accident Analysis and Prevention*, **47**, 36-44. <https://doi.org/10.1016/j.aap.2011.12.012>
- [7] Geedipally, S.R., Turner, P.A. and Sunil, P. (2011) Analysis of Motorcycle Crashes in Texas with Multinomial Logit Model. *Transportation Research Record*, **2265**, 62-69. <https://doi.org/10.3141/2265-07>
- [8] Bham, H.G., Javvadi, S.B. and Manepalli, R.R.U. (2012) Multinomial Logistic Regression Model for Single-Vehicle and Multivehicle Collisions on Urban U.S. Highways in Arkansas. *Journal of Transportation Engineering, American Society of Civil Engineers*, **138**, 786-797. [https://doi.org/10.1061/\(ASCE\)TE.1943-5436.0000370](https://doi.org/10.1061/(ASCE)TE.1943-5436.0000370)
- [9] Kim, J.-K., Ulfarsson, G.V. and Kim, S. (2008) Age and Pedestrian Injury Severity in

Motor-Vehicle Crashes: A Heteroskedastic Logit Analysis. *Accident Analysis and Prevention*, **40**, 1695-1702. <https://doi.org/10.1016/j.aap.2008.06.005>

- [10] Gumbel, E. (1958) *Statistics of Extremes*. Columbia University Press, New York. <https://doi.org/10.7312/gumb92958>