

SUPPLEMENTARY

Submitted to: Atmospheric Chemistry and Physics

Title: Quantifying the uncertainties of a bottom-up emission inventory of anthropogenic atmospheric pollutants in China

Authors: Yu Zhao, Chris P. Nielsen, Yu Lei, Michael B. McElroy, Jiming Hao

Number of tables: 8 **Number of figures:** 2

Table and figure List

Table S1. The uncertainties of activity levels.

Table S2. The uncertainties of penetrations of technologies/emission control devices by sector.

Table S3. The penetrations of technologies/fuels/emission control devices for coal-fired power plants by province.

Table S4. The uncertainties of unabated emission factors for stationary sources. For beta, gamma, weibull, and logistic distributions, 95% CIs are provided in the parentheses.

Table S5. The emission factors with uncertainties for mobile sources.

Table S6. The uncertainties of size distribution and carbonaceous fractions of PM. For beta, gamma, and logistic distributions, 95% CIs are provided in the parentheses.

Table S7. The uncertainties of removal efficiencies of emission control devices (%).

Table S8. Uncertainties of Chinese emission inventory by sector in 2005. The estimated emissions are expressed as kilo metric tons (kt). The percentages in the parentheses indicate the 95% CI around the central estimate.

Fig. S1. The source categories of bottom-up emission inventory in China.

Fig. S2. The distributions of national emissions in China in 2005. The red bars are beyond the 95% CIs. (a) SO₂; (b) NO_x; (c) PM; (d) PM₁₀; (e) PM_{2.5}; (f) BC; (g) (OC).

Tables

Table S1. The uncertainties of activity levels.

Parameter	Distribution	Sources or methods	Rating ¹
Coal use by power	Normal (CV ² : 5%)	Unit-based investigation: Zhao et al. (2008)	B
Industrial fossil fuel use	Normal (CV: 10%)	Subject judgment; IPCC (2006)	D
Industrial production	Normal (CV: 10%)	Subject judgment	D
Residential fossil fuel use	Normal (CV: 20%)	Subject judgment; IPCC (2006)	D
Vehicle number	Normal (CV: 5%)	Subject judgment	D
Vehicle mileage traveled	Normal (CV: 5%)	Wang et al.(2008) ; Kioutsioukis et al. (2004)	B
Vehicle fuel economy	Normal (CV: 14%)	Data fitting: CAAM and CATRA (2009)	A
Non-road fuel use	Normal (CV: 16%)	Subject judgment	D
Biofuel consumption	Normal (CV: 30%)	Subject judgment; IPCC (2006)	D
Agriculture production	Normal (CV: 30%)	Subject judgment	D
Waste-to-grain ratio	Uniform (Product dependent)	Lal (2005)	C
Ratio of biomass burning	Normal (Province dependent)	Questionnaire: Wang and Zhang (2008)	B

¹ A: the distribution is obtained through data fitting based on domestic field measurements; B: the distribution is determined according to domestic field measurements; C: the distribution is determined according to foreign studies; D: the distribution is subjectively given (the same below). ² Coefficients of variation, expressed as the standard deviation divided by the mean. The same below.

Table S2. The uncertainties of penetrations of technologies/emission control devices by sector.

Sector	Technology				Emission control device									
	Technology	Distribution	Rating	Wet-FGD	Other-FGD	FF	ESP	WET	CYC	Stage I	Stage II	Distribution	Rating	
CPP ¹	Pulverized	87%	-	-	12%	2%	4%	91%	6%	0%	-	-	-	-
	Grate	6%	-	-	-	-	-	2%	84%	14%	-	-	-	-
	CFB	7%	-	-	-	25%	1%	90%	8%	1%	-	-	-	-
CEM	Precalciner	44% (38-50%)	Triangular	B	-	-	38-56%	NIP ²	-	-	-	-	Uniform	D
	Other	NIP ²	NIP ²	-	-	-	5-7%	32-45%	33-48%	NIP ²	-	-	Uniform	D
Steel making	Open hearth	0%	-	-	-	-	-	32-48%	NIP ²	-	-	-	Uniform	D
	Converter	88%	-	-	-	-	40-60%	NIP ²	-	-	-	-	Uniform	D
	Electric	12%	-	-	-	-	0-10%	25-30%	50-60%	NIP ²	-	-	Uniform	D
Coke	-	-	-	-	-	-	-	80-100%	-	-	-	-	Uniform	D
Sinter	-	-	-	-	-	0-10%	55-65%	0-25%	NIP ²	-	-	-	Uniform	D
Pig iron	-	-	-	-	-	0-10%	NIP ²	-	-	-	-	-	Uniform	D
Casting	-	-	-	-	-	-	16-24%	32-48%	NIP ²	-	-	-	Uniform	D
IND coal use	Grate	NIP ²	NIP ²	-	4-6%	36-54%	-	-	29-44%	NIP ²	-	-	Uniform	D
	CFB	8-10%	Uniform	B	-	-	-	-	20-25%	45-59%	-	-	Uniform	D
RES coal use	Grate	23-28%	Uniform	D	-	-	-	-	-	-	-	-	-	-
	Furnace	15-19%	Uniform	D	-	-	-	-	-	-	-	-	-	-
Stove	NIP ²	NIP ²	-	-	-	-	-	-	-	-	-	-	-	-
LDGV	-	-	-	-	-	-	-	-	-	-	43% ³ 38% ⁴	45% ³ 23% ⁴	Normal (CV: 20%)	D
LDDV	-	-	-	-	-	-	-	-	-	-	NIP ²	40%	Normal (CV: 20%)	D
LDGT/ HDGV	-	-	-	-	-	-	-	-	-	-	16% ³ 15% ⁴	37% ³ 32% ⁴	Normal (CV: 20%)	D
LDDT/ HDDV	-	-	-	-	-	-	-	-	-	-	47% ³ 40% ⁴	35% ³ 30% ⁴	Normal (CV: 20%)	D
MC	-	-	-	-	-	-	-	-	-	-	25% ³ 20% ⁴	44% ³ 40% ⁴	Normal (CV: 20%)	D
Lime	-	-	-	-	-	-	0-5%	0-10%	0-30%	40-55%	-	-	Uniform	D
Aluminum	-	-	-	-	-	-	0-5%	0-35%	-	0-60%	-	-	Uniform	D
Al ₂ O ₃ smelt	-	-	-	-	-	-	48-60%	28-40%	NIP ²	-	-	-	Uniform	D
Other metal	-	-	-	-	-	-	20-45%	30-35%	0-5%	0-15%	-	-	Uniform	D
Brick	-	-	-	-	-	-	-	-	0-10%	35-45%	-	-	Uniform	D
Glass	-	-	-	-	-	-	0-30%	0-40%	20-30%	NIP ²	-	-	Uniform	D

¹National averages. See Table S3 for provincial-level information. ² Non-independent parameter, calculated as 1 minus the penetrations of other technologies in the sector. ³ Beijing.

⁴ Rest of China.

Table S3. The penetrations of technologies/fuels/emission control devices for coal-fired power plants by province.

Province	Boiler type			Fuel type		SO ₂ control device		PM control device			
	Pulverized	Grate	CFB	Bituminous /lignite	Anthracite	Wet-FGD	Other-FGD	FF	ESP	WET	CYC
Beijing	94%	5%	1%	49%	51%	53%	0%	6%	89%	4%	1%
Tianjin	95%	1%	4%	79%	21%	1%	0%	16%	79%	5%	0%
Hebei	88%	7%	5%	67%	33%	8%	2%	0%	89%	9%	2%
Shanxi	90%	7%	3%	62%	38%	7%	5%	15%	74%	8%	3%
Inner Mongol	92%	3%	5%	97%	3%	17%	5%	2%	89%	9%	0%
Liaoning	89%	7%	4%	88%	12%	0%	0%	0%	86%	14%	0%
Jilin	95%	5%	0%	97%	3%	6%	0%	0%	77%	22%	1%
Heilongjiang	91%	8%	1%	99%	1%	0%	6%	0%	75%	24%	1%
Shanghai	90%	1%	9%	99%	1%	0%	0%	0%	98%	2%	0%
Jiangsu	84%	7%	9%	90%	10%	18%	7%	9%	81%	10%	0%
Zhejiang	85%	13%	2%	90%	10%	17%	2%	0%	80%	20%	0%
Anhui	95%	4%	1%	88%	12%	11%	0%	0%	89%	11%	0%
Fujian	92%	3%	5%	7%	93%	38%	0%	0%	94%	6%	0%
Jiangxi	93%	5%	2%	57%	43%	0%	2%	0%	93%	4%	3%
Shandong	75%	12%	13%	86%	14%	5%	5%	0%	83%	15%	2%
Henan	75%	9%	16%	55%	45%	4%	4%	5%	80%	13%	2%
Hubei	92%	6%	2%	47%	53%	7%	0%	0%	88%	11%	1%
Hunan	94%	6%	0%	48%	52%	4%	0%	0%	81%	18%	1%
Guangdong	89%	3%	8%	39%	61%	14%	10%	0%	94%	6%	0%
Guangxi	94%	3%	3%	50%	50%	16%	0%	0%	91%	9%	0%
Hainan	100%	0%	0%	38%	62%	0%	0%	0%	83%	17%	0%
Chongqing	88%	9%	3%	51%	49%	71%	0%	13%	73%	13%	1%
Sichuan	80%	9%	11%	60%	40%	6%	1%	9%	77%	12%	2%
Guizhou	97%	2%	1%	42%	58%	40%	0%	7%	90%	3%	0%
Yunnan	82%	5%	13%	58%	42%	6%	2%	0%	93%	5%	2%
Shaanxi	96%	4%	0%	99%	1%	0%	0%	3%	90%	7%	0%
Gansu	87%	2%	11%	99%	1%	6%	4%	0%	90%	10%	0%
Qinghai	98%	2%	0%	100%	0%	0%	0%	0%	94%	6%	0%
Ningxia	97%	2%	1%	100%	0%	0%	0%	0%	94%	6%	0%
Xinjiang	79%	10%	11%	100%	0%	8%	0%	0%	83%	15%	2%

Table S4. The uncertainties of unabated emission factors for stationary sources. For beta, gamma, weibull, and logistic distributions, 95% CIs are provided in the parentheses.

	SR/EF _{SO2} (kg/t) ^{1,2}			EF _{NOX} (kg/t) ²			AR/EF _{PM} (kg/t) ^{1,2}		
	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating
CPP: pulverized	90% (87-93%)	Beta	A	Technology dependent	Technology dependent	A	69% (61-76%)	Beta	A
Grate boiler	85% (59-93%)	Beta	A	4.7	Lognormal (GSD ³ :1.8)	A	13% (2-22%)	Logistic	A
CFB boiler	60% (43-66%)	Beta	B	2.5-3.4	Uniform	B	48-60%	Uniform	B
Hot water system	80% (20-91%)	Beta	A	1.8 (0.9-10.6)	Gamma	A	1.9	Lognormal (GSD:2.3)	A
Small stove	80% (20-91%)	Beta	D	0.9(0.1-3.9)	Triangular	B	11 (1-31)	Beta	A
IND: oil combustion	-	-	-	5.3-16.7	Uniform	B	0.50-0.90	Uniform	B
IND: gas combustion	-	-	-	1.9-3.5	Uniform	B	0.14-0.20	Uniform	B
RES: oil combustion	-	-	-	0.2-16.7	Uniform	B	0.10-0.90	Uniform	B
RES: gas combustion	-	-	-	0.1-3.3	Uniform	B	0.10-0.20	Uniform	B
Biofuel: waste	0.05	Lognormal (GSD:3.1)	A	1.5 (0.2-4.4)	Gamma	A	4.0 (0.6-10.8) ⁴	Beta	A
Biofuel: firewood	0.004 (0.002-0.052)	Gamma	A	1.4 (0.1-3.1)	Logistic	A	3.1(0.0-9.7) ⁴	Triangular	A
Open burning	0.0-2.0	Uniform	B	3.8 (0.7-7.9)	Uniform	B	0.7-13.7 ⁴	Uniform	B
CEM precalciner				13.7 (3.0-23.8)	Triangular	B	117 (12-343)	Beta	A
CEM shaft	85% (59-93%)	Beta	A	18.1 (10.8-22.1)	Triangular	B	85	Lognormal (GSD:3.0)	A
CEM rotary				3.2 (1.7-8.5)	Triangular	B	30 (13-91)	Triangular	A
CEM other processes	-	-	-	-	-	-	140 (62-235)	Triangular	B
Coking	0.7	Normal (CV: 20%)	D	-	-	-	5	Normal (CV: 20%)	D
Sintering	2.7	Lognormal (GSD:1.5)	A	0.64 (0.50-0.76)	Triangular	B	24-70	Uniform	A
Pig iron	-	-	-	-	-	-	48.8	Lognormal (GSD: 1.3)	A
Pig iron: fugitive	-	-	-	-	-	-	16 (10-21)	Weibull	A
Steel: open hearth	-	-	-	-	-	-	20.2 (0.0-40.3)	Logistic	A
Steel: converter	-	-	-	-	-	-	40 (35-63)	Weibull	A
Steel: electric	-	-	-	-	-	-	12.2 (8.2-20.9)	Triangular	A
Casting	-	-	-	-	-	-	10	Normal (CV: 20%)	D
Casting: fugitive	-	-	-	-	-	-	5.8	Normal (CV: 20%)	D

Table S4. The uncertainties of unabated emission factors for stationary sources. For beta, gamma, weibull, and logistic distributions, 95% CIs are provided in the parentheses (continued).

	SR/EF _{SO2} (kg/t) ¹			EF _{NOX} (kg/t)			AR/EF _{PM} (kg/t) ¹		
	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating
H ₂ SO ₄ production	3.4 (1.9-5.0)	Logistic	A	-	-	-	-	-	-
Lime	1.0	Normal (CV: 20%)	D	1.6	Normal (CV: 20%)	D	30-100	Uniform	B
Aluminum smelt	-	-	-	-	-	-	41.4 (2.2-73.4)	Weibull	A
Al ₂ O ₃ smelt	-	-	-	-	-	-	1651 (685-2164)	Triangular	B
Copper smelt	212 (0-377)	Weibull	A	-	-	-	280 (0-1011)	Weibull	A
Lead smelt	80 (43-146)	Triangular	B	-	-	-	250 (237-452)	Triangular	B
Zinc smelt	80 (43-146)	Triangular	B	-	-	-	196 (135-369)	Triangular	B
HNO ₃ production	-	-	-	7.1 (1.4-56)	Gamma	A	-	-	-
Brick production	-	-	-	0.3	Normal (CV: 20%)	D	3.7	Normal (CV: 20%)	D
Glass production	-	-	-	-	-	-	10.6 (7.4-13.1)	Triangular	B

¹ The values with and without a “%” indicate the SR/AR and EF, respectively. ² The emission factors for processes, iron and steel, and PM emission factors for cement are expressed as kg/t-product, and others are expressed as kg/t-fuel. ³ Geometric standard deviation. ⁴ Emission factor for PM_{2.5}.

Table S5. The emission factors with uncertainties for mobile sources.

	NO _x (kg/t-fuel)			PM _{2.5} (kg/t-fuel)			Rating
	Pre-stage I	Stage I	Stage II	Pre-stage I	Stage I	Stage II	
On-road							
LDGV	22.0	3.9	2.3	0.30	0.17	0.12	B
LDDV	17.4	16.6	16.6	4.67	2.35	1.22	B
LDGT1	25.5	7.4	3.5	0.25	0.14	0.14	B
LDGT2	15.8	2.8	1.6	0.40	0.22	0.07	B
LDDT	30.8	29.4	30.8	4.25	2.32	1.15	B
HDGV	21.5	3.9	2.3	0.40	0.22	0.07	B
HDDV	77.6	57.4	56.1	3.00	2.26	0.93	B
MC	6.9	6.6	6.6	6.00	1.95	1.20	B
Probability distribution	Lognormal (CV: 36%)	Lognormal (CV: 36%)	Lognormal (CV: 17%)	Lognormal (CV: 59%)	Lognormal (CV: 59%)	Lognormal (CV: 34%)	
Non-road							
Railway	32.5	-	-	3.00	-	-	D
Shipping	42.9	-	-	1.10	-	-	D
Construction machine	17.5	-	-	6.70	-	-	D
Tractor	48.5	-	-	13.30	-	-	D
Rural vehicle	48.5	-	-	6.10	-	-	D
Rural machine	17.5	-	-	4.40	-	-	D
Probability distribution	Lognormal (CV: 100%)	-	-	Lognormal (CV: 100%)	-	-	

Table S6. The uncertainties of size distribution and carbonaceous fractions of PM. For beta, gamma, and logistic distributions, 95% CIs are provided in the parentheses.

	Size fraction						Carbonaceous fractions/ <i>EF</i> (kg/t-fuel) ¹					
	PM _{2.5}			PM _{2.5-10}			BC			OC		
	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating
CPP: PC	6%	Lognormal (GSD:1.19)	A	16% (13-19%)	Beta	A	0-4%	Uniform	C	-	-	-
Grate boiler	3-25%	Uniform	B	3-23%	Uniform	B	0-22%	Uniform	B	1-23%	Uniform	B
CFB boiler	5-10%	Uniform	B	21-24%	Uniform	B	0-23%	Uniform	B	-	-	-
Hot water system	32-48%	Uniform	D	24-36%	Uniform	D	6-50%	Uniform	C	6-40%	Uniform	C
Small stove	NIP ²	NIP ²	NIP ²	3%	Lognormal (GSD:1.25)	A	0-13	Uniform	B	0-17	Uniform	B
IND oil combustion	-	-	-	-	-	-	13-30%	Uniform	C	9-13%	Uniform	C
RES oil combustion	-	-	-	-	-	-	14-50%	Uniform	C	9-20%	Uniform	C
Gas combustion	-	-	-	-	-	-	6-13%	Uniform	C	10-50%	Uniform	C
Biofuel: waste	-	-	-	-	-	-	0.4	Lognormal (GSD: 2.5)	A	2.2	Lognormal (GSD: 2.2)	A
Biofuel: firewood	-	-	-	-	-	-	1.5	Lognormal (GSD: 2.2)	A	1.2	Lognormal (GSD: 1.9)	A
Open burning	-	-	-	-	-	-	0.2-0.7	Uniform	B	0.5-7.3	Uniform	B
CEM kiln: precalciner	14-22%	Uniform	D	19-29%	Uniform	D						
CEM kiln: shaft	7-14%	Uniform	C	17-21%	Uniform	C						
CEM kiln: rotary	7-11%	Uniform	C	17-20%	Uniform	C	0.6-1.0%	Uniform	C	1-3%	Uniform	C
CEM processes	1-13%	Uniform	C	8-26%	Uniform	C						
Coking	7-60%	Uniform	C	2-38%	Uniform	C	30-50%	Uniform	C	28-42%	Uniform	D
Sintering	5-9%	Uniform	D	6-10%	Uniform	D	0.8-1.2%	Uniform	D	4-6%	Uniform	D
Pig iron	10-23%	Uniform	C	6-27%	Uniform	C	10-28%	Uniform	C	2-5%	Uniform	C
Pig iron: fugitive	6-14%	Uniform	C	4-11%	Uniform	C	0-10%	Uniform	C	0-2%	Uniform	C
Steel: open hearth	48-72%	Uniform	D	18-28%	Uniform	D	-	-	-	-	-	-
Steel: converter	23-65%	Uniform	C	2-23%	Uniform	C	-	-	-	16-24%	Uniform	C
Steel: electric	38-48%	Uniform	D	12-18%	Uniform	D	-	-	-	1.6-2.4%	Uniform	D
Casting	58-71%	Uniform	C	6-29%	Uniform	C	-	-	-	2-4%	Uniform	D
Casting: fugitive	19-29%	Uniform	D	20-30%	Uniform	D	-	-	-	2-4%	Uniform	D
Lime	1.6-2.4%	Uniform	D	8-12%	Uniform	D	1.6-2.4%	Uniform	D	1-6%	Uniform	C
Aluminum smelt	18-44%	Uniform	C	15-24%	Uniform	C	-	-	-	-	-	-
Al ₂ O ₃ smelt	14-22%	Uniform	D	5-7%	Uniform	D	-	-	-	-	-	-
Other metal smelt	66-88%	Uniform	D	8-12%	Uniform	D	-	-	-	-	-	-
Brick production	6-8%	Uniform	D	10-16%	Uniform	D	40-50%	Uniform	C	35-40%	Uniform	C

Table S6. The uncertainties of size distribution and carbonaceous fractions of PM. For beta, gamma, and logistic distributions, 95% CIs are provided in the parentheses (continued).

	Size fraction						Carbonaceous fractions/ <i>EF</i> (kg/t-fuel) ¹					
	PM _{2.5}			PM _{2.5-10}			BC			OC		
	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating
Glass production	73-95%	Uniform	D	3-5%	Uniform	D	-	-	-	-	-	-
On-road: gasoline	-	-	-	-	-	-	2-81%	Uniform	C	3-65%	Uniform	C
On-road: diesel	-	-	-	-	-	-	43% (24-86%)	Gamma	A	37% (1-72%)	Logistic	A
Non-road: diesel	-	-	-	-	-	-	4-84%	Uniform	C	1-32%	Uniform	C

¹ The values with and without a “%” indicate the fraction and *EF*, respectively. ² Non-independent parameter, calculated as 1 minus the PM fractions of other sizes.

Table S7. The uncertainties of removal efficiencies of emission control devices (%).

	PM _{2.5}			PM _{2.5-10}			PM _{>10}			SO ₂		
	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating	Value	Distribution	Rating
FF	99.3 (99.00-99.70)	Triangular	B	99.7 (99.5-99.9)	Triangular	B	99.95 (99.90-99.99)	Triangular	B	-	-	-
ESP	92.31	Lognormal (GSD:1.0)	A	96.97	Lognormal (GSD:1.0)	A	99.46	Normal (SD ¹ :0.1)	A	-	-	-
WET (power)	67.40 (37.50-71.73)	Triangular	B	85.74 (78.57-90.00)	Triangular	B	96.51 (94.37-98.65)	Triangular	B	10-30	Uniform	D
WET (industry)	56.96 (37.50-71.73)	Triangular	B	84.01 (78.57-90.00)	Triangular	B	96.49 (94.37-98.65)	Triangular	B	-	-	-
CYC	13.33 (10.00-65.12)	Triangular	B	75 (70.00-77.78)	Triangular	B	90 (72.00-95.00)	Triangular	D	-	-	-
Wet-FGD	53.74	Normal (SD: 2.5)	A	81.21	Normal (SD: 2.8)	A	92.63	Normal (SD: 0.7)	A	75 (55-95)	Triangular	B
Other-FGD	-	-	-	-	-	-	-	-	-	30 (10-60)	Triangular	B

¹ Standard deviation. The same below.

Table S8. Uncertainties of Chinese emission inventory by sector in 2005. The estimated emissions are expressed as kilo metric tons (kt). The percentages in the parentheses indicate the 95% CI around the central estimate.

	SO ₂	NO _x	PM	PM ₁₀	PM _{2.5}	BC	OC
CPP	16258 (-16%, 21%)	6730 (-19%, 16%)	2768 (-18%, 38%)	1859 (-19%, 49%)	912 (-26%, 80%)	16 (-68%, 379%)	2 (-72%, 2307%)
CEM	1364 (-35%, 30%)	1274 (-39%, 53%)	7316 (-32%, 105%)	4960 (-41%, 106%)	2756 (-55%, 129%)	22 (-60%, 117%)	55 (-65%, 168%)
ISP	1155 (-51%, 103%)	232 (-25%, 25%)	3624 (-15%, 134%)	2088 (-30%, 71%)	1585 (-32%, 61%)	225 (-81%, 128%)	234 (-67%, 110%)
IND	7489 (-35%, 27%)	3684 (-50%, 159%)	3028 (-62%, 124%)	1730 (-60%, 164%)	1030 (-63%, 239%)	112 (-80%, 362%)	37 (-64%, 1318%)
PRO	1514 (-44%, 38%)	1106 (-29%, 34%)	11848 (-40%, 28%)	3067 (-28%, 35%)	1565 (-22%, 57%)	243 (-43%, 55%)	245 (-52%, 28%)
TRA (on road)	54 (-18%, 53%)	2356 (-25%, 44%)	133 (-35%, 53%)	133 (-35%, 53%)	133 (-35%, 53%)	43 (-53%, 126%)	37 (-91%, 123%)
TRA (non road)	187 (-30%, 49%)	2368 (-51%, 135%)	457 (-42%, 75%)	444 (-43%, 77%)	419 (-45%, 80%)	195 (-88%, 105%)	65 (-84%, 144%)
RES (fossil fuel)	2957 (-56%, 41%)	667 (-38%, 120%)	1788 (-67%, 156%)	1396 (-73%, 194%)	1261 (-76%, 208%)	336 (-81%, 403%)	930 (-92%, 144%)
RES (biomass)	107 (-71%, 304%)	1368 (-56%, 123%)	3710 (-61%, 99%)	3562 (-61%, 99%)	3450 (-61%, 99%)	505 (-62%, 304%)	1598 (-58%, 216%)
Total	31085 (-14%, 13%)	19785 (-13%, 37%)	34672 (-11%, 38%)	19239 (-14%, 45%)	13111 (-17%, 54%)	1697 (-25%, 136%)	3203 (-40%, 121%)

Figures

Fig. S1.



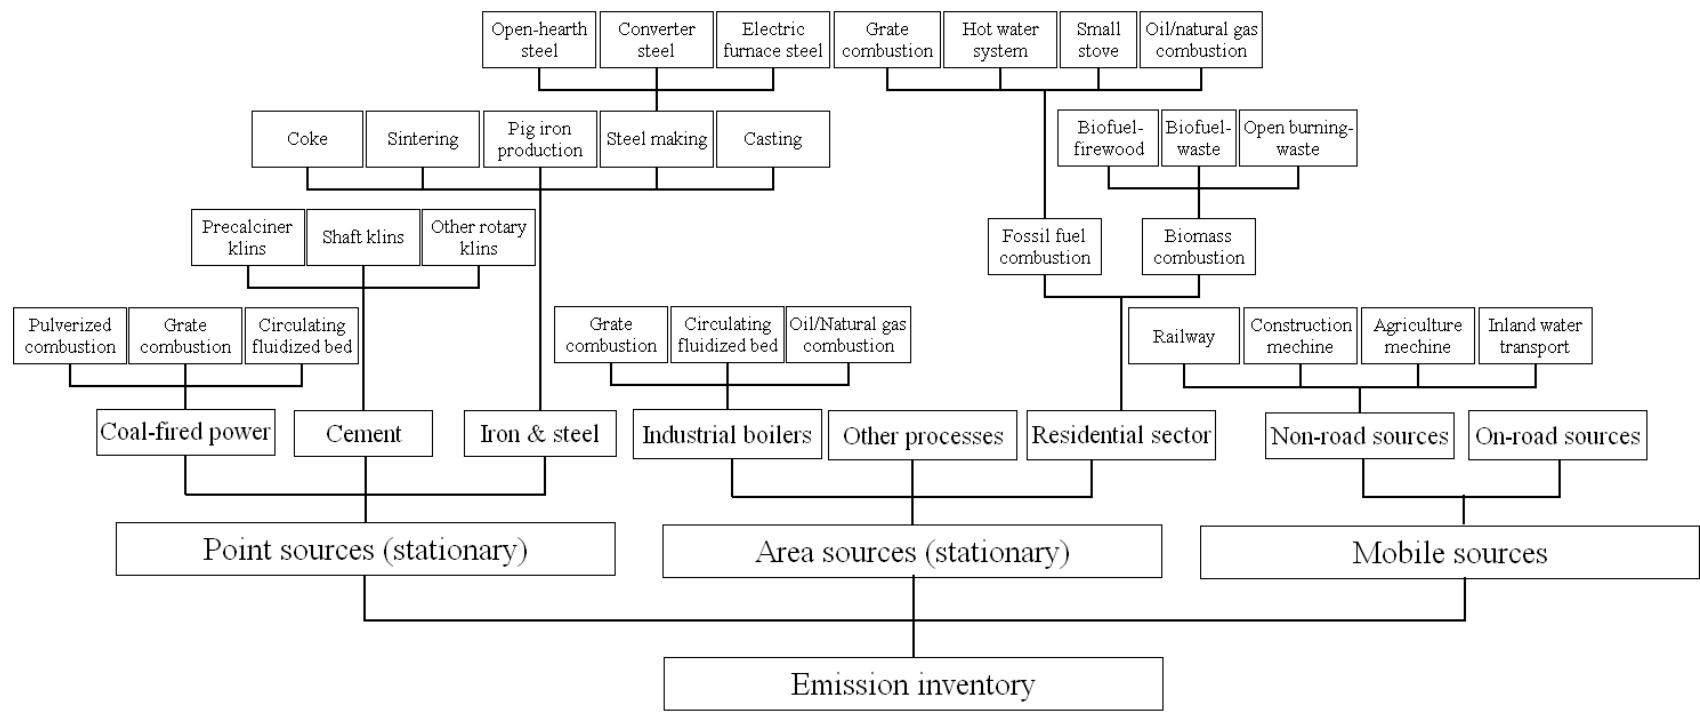



Fig. S2.

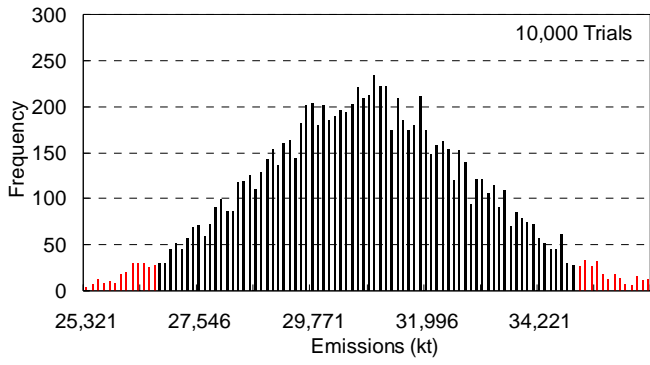


(a)

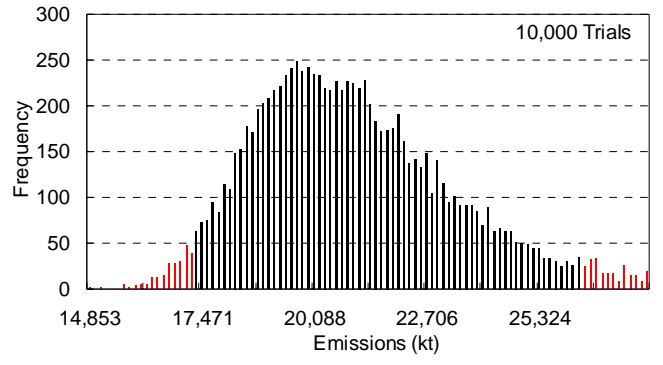


(b)

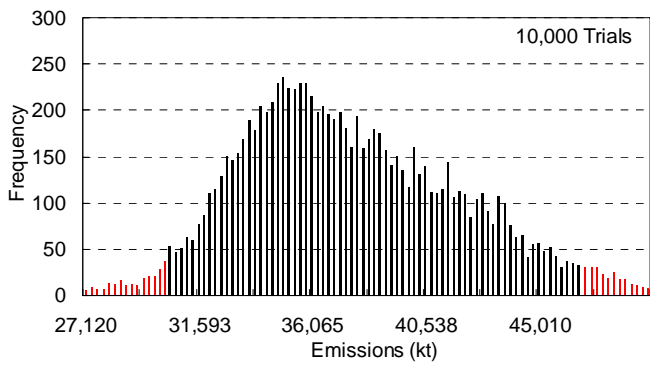


(c)

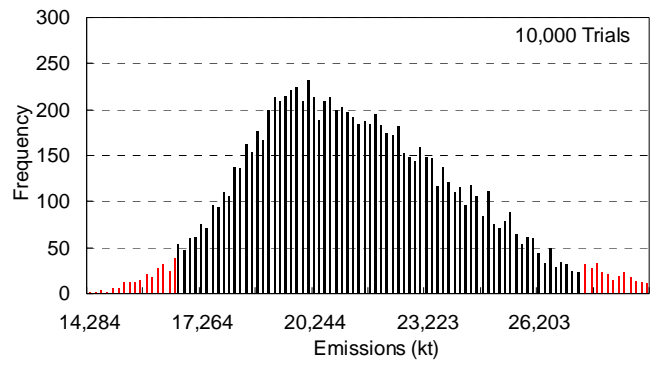


(d)

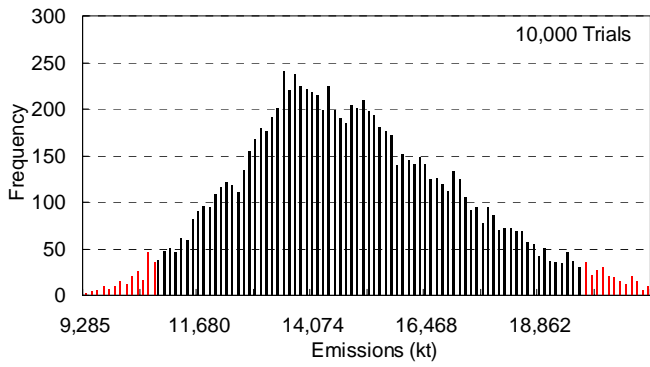

(e)

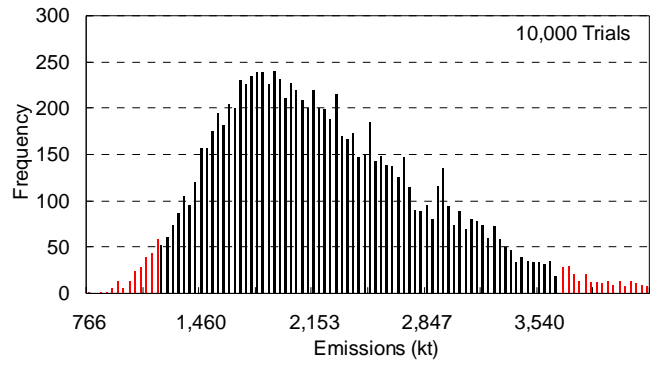

(f)

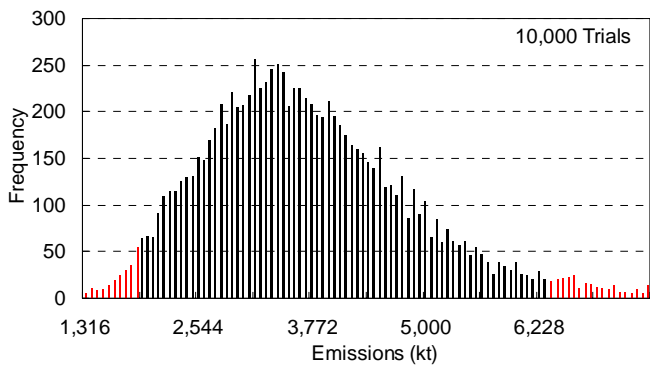

(g)

References

China Association of Automobile Manufacturers (CAAM) and China Automotive Technology & Research Center (CATRA): Evaluation report of automobile energy saving in China (in Chinese), available at <http://caam.org.cn/files/file/0906/zhyh.pdf>, 2009.

Kioutsioukis, I., Tarantola, S., Saltelli, A., and Debona, G.: Uncertainty and global sensitivity analysis of road transport emission estimates, *Atmos. Environ.*, 38, 6609-6620, 2004.

Lal, R.: World crop residues production and implications of its use as a biofuel, *Environ. Int.*, 31, 575-584, 2005.

Wang, H. K., Chen, C. H., Huang, C., and Fu, L. X.: On-road vehicle emission inventory and its uncertainty analysis for Shanghai, China, *Sci. Total. Environ.*, 398, 60-67, 2008.

Wang, S. X., and Zhang, C. Y.: Spatial and temporal distribution of air pollutant emission from open burning of crop residues in China (in Chinese), *Sciencepaper online*, 3, 329-333, 2008.

Zhao, Y., Wang, S.X., Duan, L., Lei, Y., Cao, P.F., and Hao, J.M.: Primary air pollutant emissions of coal-fired power plants in China: current status and future prediction. *Atmos. Environ.*, 42, 8442-8452, 2008.