


Accepted Manuscript

Optimum Transmission Policy for Remote State Estimation with
Opportunistic Energy Harvesting

Heng Zhang, Wei Xing Zheng

PII: S1389-1286(18)30088-4
DOI: [10.1016/j.comnet.2018.02.021](https://doi.org/10.1016/j.comnet.2018.02.021)
Reference: COMPNW 6419

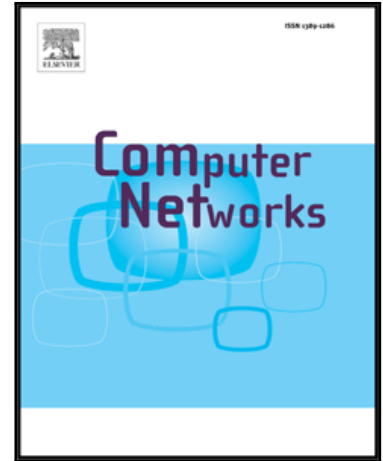

To appear in: *Computer Networks*

Received date: 22 August 2017
Revised date: 25 January 2018
Accepted date: 14 February 2018

Please cite this article as: Heng Zhang, Wei Xing Zheng, Optimum Transmission Policy for Remote State Estimation with Opportunistic Energy Harvesting, *Computer Networks* (2018), doi: [10.1016/j.comnet.2018.02.021](https://doi.org/10.1016/j.comnet.2018.02.021)

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Optimum Transmission Policy for Remote State Estimation with Opportunistic Energy Harvesting[☆]

Heng Zhang^{a,b}, Wei Xing Zheng^{b,*}

^a*School of Science, Huaihai Institute of Technology, Lianyungang, Jiangsu 222005, P.R. China.*

^b*School of Computing, Engineering and Mathematics, Western Sydney University, Sydney, NSW 2751, Australia.*

Abstract

An attractive research direction in energy harvesting wireless networks is to balance the energy transfer and data transmission concurrently. In this paper, we consider the scenario that a transmitter can send the state information of a physical process to a remote estimator or deliver the energy to an energy receiver. It is assumed that the communication channels between the transmitter and the remote estimator and energy receiver sides are block fading. We formulate a problem that weighs the estimation error at the remote estimator side with the harvested energy at the energy receiver side. For the case that the realtime channel state information is known by the transmitter (called full channel state information and FCSI for short), we respectively find out the optimal transmission power switch policy and power split policy. Moreover, these results are further generalized to the case that the realtime channel state information is unknown and the statistical characteristics of the communication channels are known by the transmitter (called

[☆]This work was supported in part by a research grant from the Australian Research Council.

*Corresponding author

Email addresses: Dr. Zhang.Heng@ieee.org (Heng Zhang),
w.zheng@westernsydney.edu.au (Wei Xing Zheng)

Download English Version:

<https://daneshyari.com/en/article/6882741>

Download Persian Version:

<https://daneshyari.com/article/6882741>

[Daneshyari.com](https://daneshyari.com)