

CONF-831047-131

Speech/Article Number

HEDL-SA-2968-S

**NOTICE**

**PORTIONS OF THIS REPORT ARE ILLUSTRATIVE**

It has been reproduced from the best available copy to permit the broadest possible availability.

HEDL-SA--2968-S

DE84 006346

CHARACTERIZING W-2 SLSF EXPERIMENT  
TEMPERATURE OSCILLATIONS USING COMPUTER  
GRAPHICS

~~(All Capitals, Double Spaced, Centered)~~

AUTHOR  
Devin E. Smith  
DATE  
June 23, 1983

(Capitals, Lower Case;  
Centered)

American Nuclear Society;

October 30 - November 4, 1983, San Francisco

(Centered; Capitals,  
Lower Case)

✓ HANFORD ENGINEERING DEVELOPMENT LABORATORY  
Operated by Westinghouse Hanford Company, a subsidiary of  
Westinghouse Electric Corporation, under the Department of  
Energy Contract No. DE-AC06-76FF02170  
P.O. Box 1970, Richland, Washington 99352

**MASTER**

**COPYRIGHT LICENSE NOTICE**

By acceptance of this article, the Publisher and/or recipient acknowledges the U.S. Government's right to retain a nonexclusive, royalty-free license in and to any copyright covering this paper.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

**DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## **DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

Characterizing W-2 SLSF Experiment Temperature  
Oscillations Using Computer Graphics

D. E. Smith  
Westinghouse Hanford Company  
P.O. Box 1970  
Richland, Washington 99352

SUMMARY

The W-2 SLSF experiment was an instrumented in-reactor test performed to characterize the failure response of full-length, preconditioned LMFBR prototypic fuel pins to slow transient overpower (TOP) conditions. Although the test results were expected to confirm analytical predictions of upper level failure and fuel expulsion, an axial midplane failure was experienced. Extensive post-test analyses were conducted to understand all of the unexpected behavior in the experiment. (1) The initial post-test effort focused on the temperature oscillations recorded by the 54 thermocouples used in the experiment. In order to synthesize the extensive data records and identify patterns of behavior in the data records, a computer-generated film was used to present the temperature data recorded during the experiment.

The temperature oscillations were quickly determined to be centered in the test section of the seven pin experiment. A review of the records for test loop thermocouple outside of the test section revealed only damped oscillations transported from the test section. This observation focused attention on 17 thermocouples on five axial levels starting at the fuel column midplane and extending to the top

of the fuel column. Since the thermocouples were distributed in 13 different radial positions in the test section, manual comparison of the data generally proved to be unwieldy.

The five degrees of freedom found in the data (3-D spatial, temperature magnitude, and time) complicated the process of interpreting in the data. The computer-generated film showed: 1) the spatial considerations by displaying together two cross sections and a side view of the test section, 2) the thermocouple temperatures by color variations, and 3) the time aspect by the natural procession of the film. A black and white simulation of a color film frame is shown in Figure 1 for illustration purposes.

The film was generated using a variety of tools. A software library called KRISPLA, developed by Boeing Computer Science, Richland (BSCR) to drive a FR-80 Microfilm Recorder was used to generate the 16 mm film. A FORTRAN-77 program was developed to provide frame, line, and color control using the KRISPLA library. The title and the basic frame outline were built into the main program. A data file of temperature variations for each thermocouple was created using the differences determined at each .1s time interval between the test data and the pretest thermal analysis temperatures. The file was used to drive a temperature-color correlation (red-yellow-white) to visually simulate the recorded temperature oscillations.

The film shown at half real time speed allowed the formation of general impressions as well as the comparison of specific thermocouple

pairs. The simulated frame shown in Figure 1 may be used as an example of the visual impact of the methodology. The hexagonal cross sections shown on the left side of Figure 1 show the thermocouples located in the midplane region (bottom) and top region (top) of the fuel column. The axial side view as seen from the bottom of the hexagonal section is shown on the right side of the frame. Temperature deviation is shown by color: black (low), grey (neutral), and white (high). The top section shows a symmetrical pattern signifying fuel pin motion outward to form hot coolant channels next to the hexagonal wall and inward to form cooler coolant channels. The opposite pattern is shown in the midplane cross section. The side view is slightly more complicated since front and back thermocouples are shown together. This view allows identification of spiral flow patterns.

The sheer volume of data recorded in the extremely well instrumented W-2 experiment strained the traditional manual method of correlating data in both raw and line graph form. The simultaneous film representation of deviations in the W-2 thermocouple data permitted discovery of previously unobserved interdependencies in temperature oscillations. One interdependency which was identified is shown in Figure 2. The W-2 temperature oscillation film proved invaluable in directing further study of thermocouple data records and in establishing that the cause of the temperature oscillations was fuel pin bowing.

## References

1. D.E. Smith, A.L. Pitner, and G.E. Culley, "Posttest Analysis of the W-2 SLSF Experiment," Trans. Am. Nucl. Soc., 44, pp. 325-326, 1983.


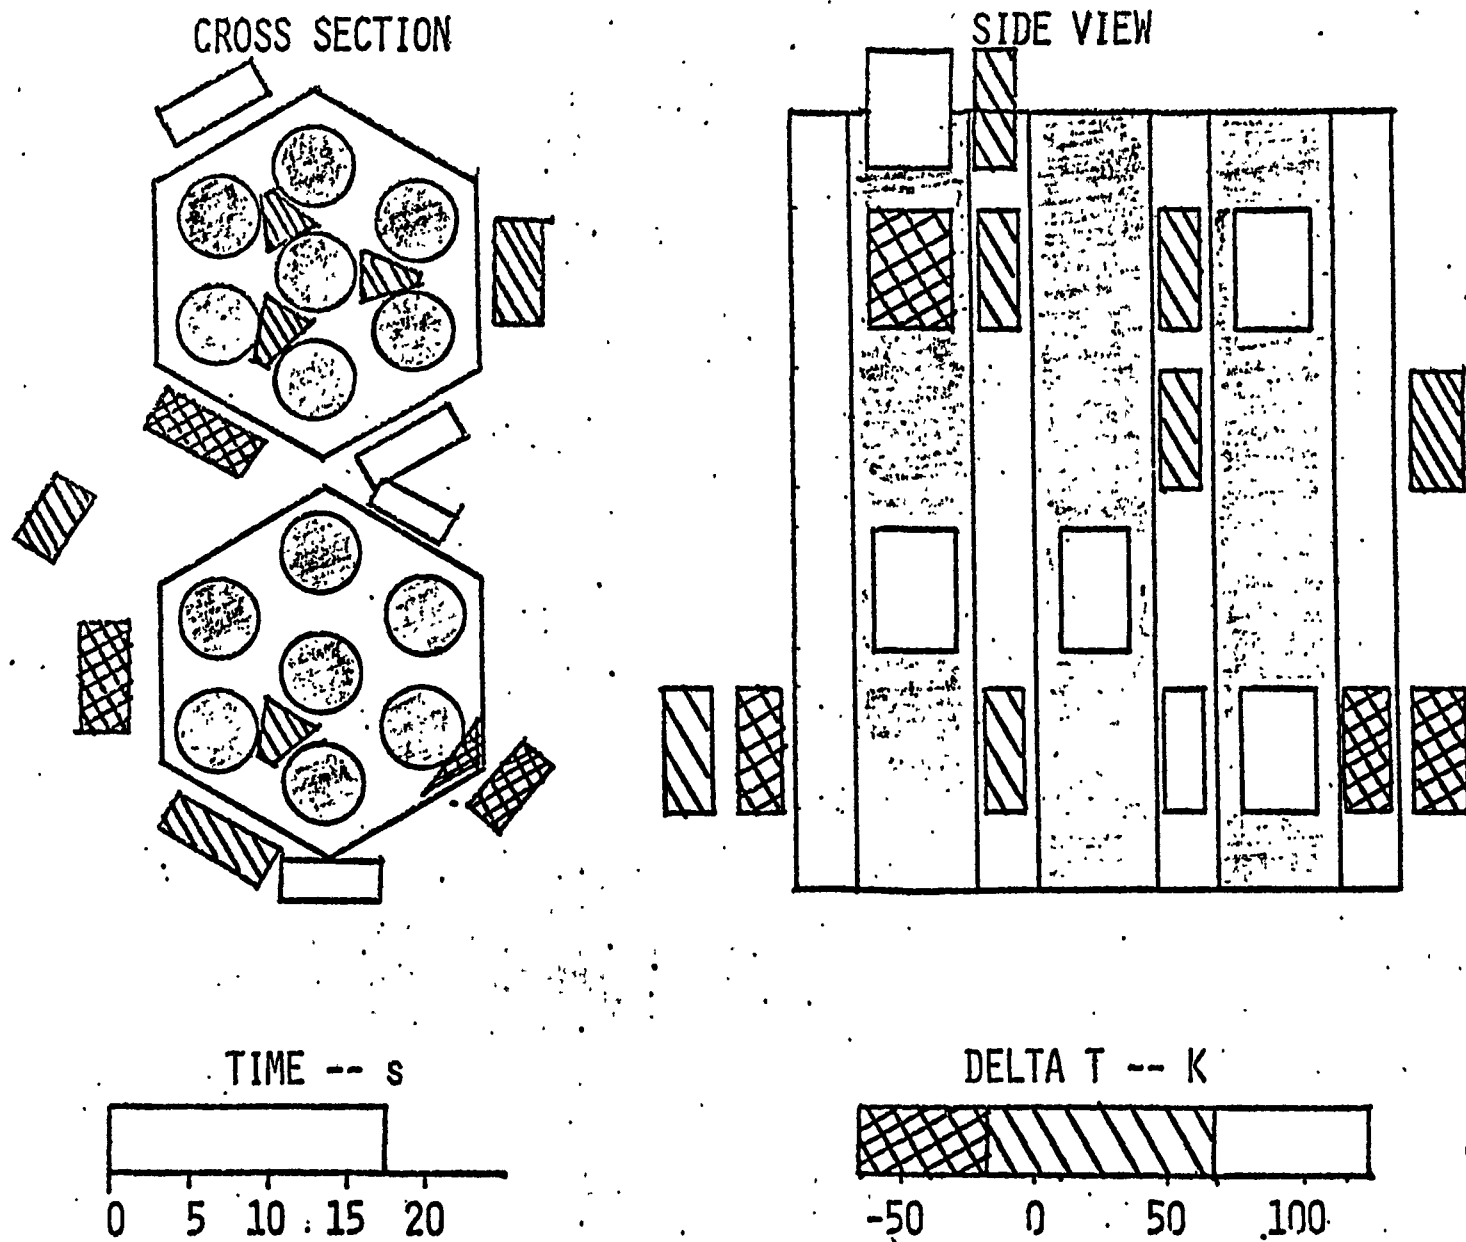


Figure 1. W-2 Temperature Oscillation Simulated Film Frame.



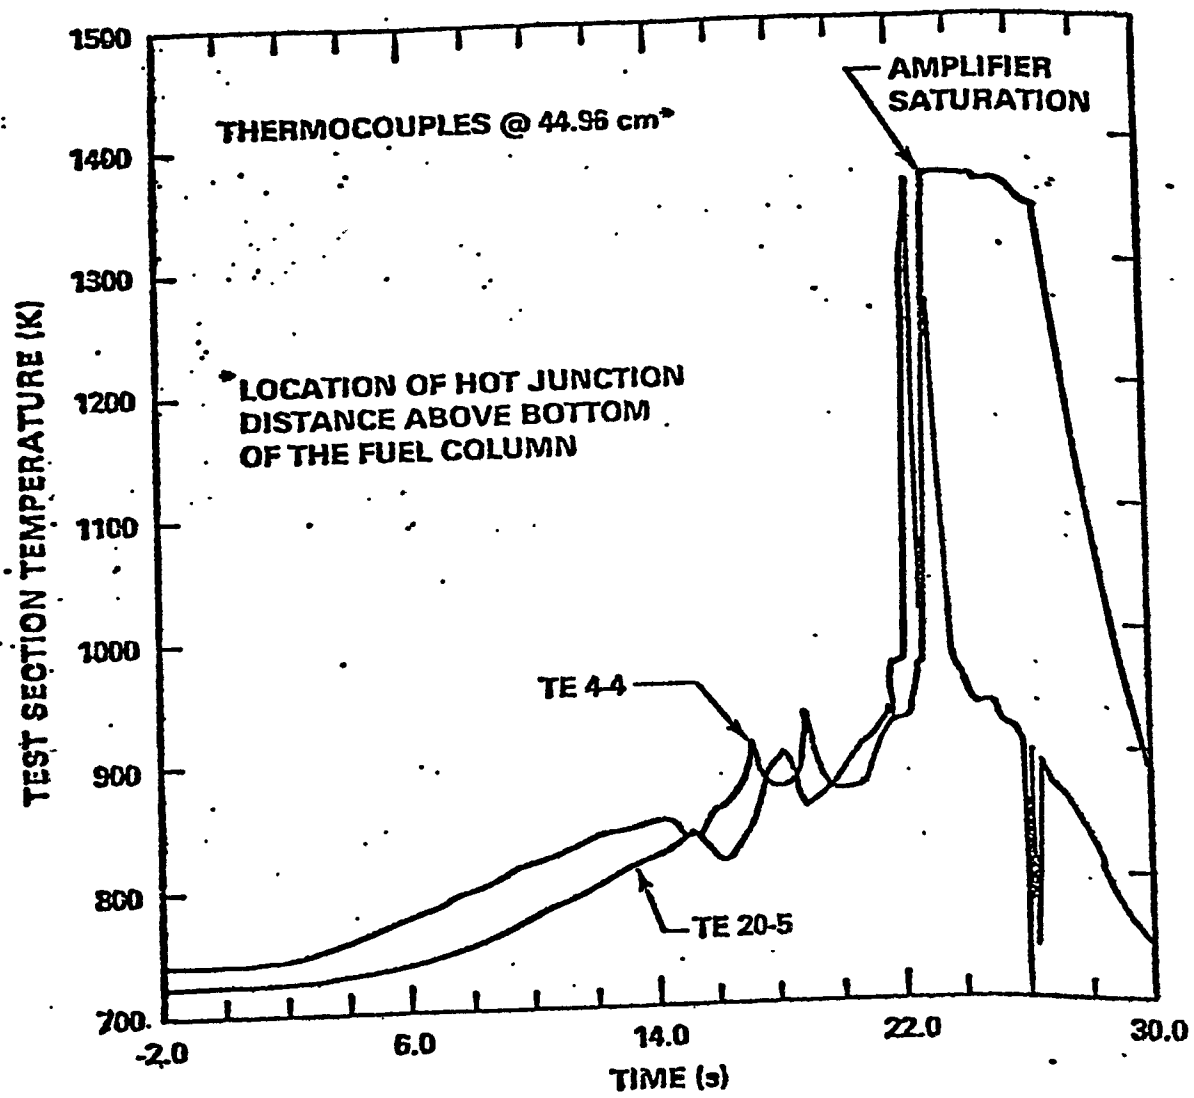

W-2 SLSF EXPERIMENT: FINAL TRANSIENT

HEDL 8207-098.1

FIGURE 2. W-2 Thermocouple Data: Inner-Channel (TE 4-4) vs Fluted Tube (TE 20-5) Temperatures.