CUBUS. 44

5-89

COMISION DE ENERGIA ATOMICA DE CUBA


TITULO% OF

MEASUREMENT FO THE FISSION CROSS-SECTION RATIO FOR ²³⁷Np/²³⁵U AROUND 14 MEV NEUTRON ENERGIES.

AUTORES:

L. Desdin Institute of Nuclear Science and Technology Havana, Cuba.

S. Szegedy, J. Csikai Institute of Experimental Physics, Kossoth Univ. 4001 Debrecen, Pf. 105, Hungary.



We regret that some of the pages in the microfiche copy of this report may not be up to the proper legibility standards, even though the best possible copy was used for preparing the master fiche

Clasificación temática del INIS

A 33-50 FISSION

DESCRIPTORES

NEUTRON GENERATORS
FISSION CHAMBERS
URANIUM 235
NEPTUNIUM 237
FAST FISSION

Aprobado por el Consejo Científico Ramal de la Esfera Nuclear el día 3 de junio de 1988 Measurement of the fission cross-section ratio for $^{237}\mathrm{Np}/^{235}\mathrm{U}$ around 14 MeV neutron energies *,**

L. Desdin

Institute of Nuclear Science and Technology.

Havana, Cuba.

S.Szegedy, J.Csikai.

Institute of Experimental Physics. Kossuth University.
4001 Debrecen, Pf. 105, Hungary.

- * Dedicated to Prof. Berényi on his 60th birthay.
- ** This work was supported by the Hungarian Research Fundation (Contract No. 259).

MEASUREMENT OF THE FISSION CROSS-SECTION RATIO FOR $^{237}{\rm Np/}$ $^{235}{\rm U}$ AROUND 14 MeV NEUTRON ENERGIES.

Resumen La relación de las secciones eficaces de fision 237 Np/ 235 U para neutrones de energías de la región de 14 MeV fue medida con una camara de ionización back-to-back. Los neutrones fueron producidos con un acelerador de 180 kV usando la reacción T(d,n) He. No se encontró dependencia significativa de la relación de las secciones eficaces con la energía.

Abstract Fission cross-section ratio was determined for 237 Np/ 235 U around 14 MeV neutron energies with a back-to-back ionization chamber. Neutrons were produced by a 180 kV accelerator using T(d,n) He reaction. No significant energy dependence was found in the cross section ratio.

INTRODUCTION.

The ²³⁷Np fission cross-section is often used in dosimetry.

For such a purpuse, an accurate knowledge of the ²³⁷Np to

²³⁵U fission cross-section ratio is necessary. These data are

also required for a systematic study of fission cross-sections.

A number of ratio measurements have been reported in the range of 13.5-15 MeV. Behrens et.al.[1] have measured the fission cross-section ratio of ²³⁷Np to ²³⁵U as a function of neutron energy using fission chamber, threshold cross-section method and time of flight technique.

Fission cross-section ratio ²³⁷Np/ ²³⁵U has been determined by Varnagy et. al.[2] using solid state nuclear track detectors in combination with the jumping spark counting evaluation technique. Carlson et.al.[3] have reported a relative measurement of ²³⁷Np/ ²³⁵U.

Fast neutron fission cross-section measurements for 237 Np has been reviewed by Cross et.al.[4] and Lapenas [5]. Alkhazov et.al.[6] measured the σ value for 237 Np(n,f) at 14.8 MeV by time correlated associated particle method. The $\sigma(^{237}$ Np(n,f)) was measured with absolute method by White et.al.[7] and by Moat[8]. These absolute data can be converted to the 237 Np/ 236 U ratios using evaluated 235 U(n,f) cross-sections from ENDF/B-V [9].

The analysis of the $^{237}{\rm Np}/$ $^{235}{\rm U}$ fission cross-section ratios around 14 MeV shows discrepancies in the magnitude of the reported data.

At 14.1 MeV the value of White et.al.[7] is higher by about 8% than that of Behrens et.al.[1]. The trend in the data observed by Carlson et.al.[3] agrees with that of Behrens

et.al.[1] around 14 MeV. The Adamov et.al.[10] value at 14.7 MeV is higher by about 10% than that of Behrens et.al.[1]. The Varnagy's[2] data within the limits of errors are in good agreement with the Lapenas[5] data, but they are sistematically higher than the data of Behrens et.al.[1]. The Alkhazov et.al.[6] value at 14.8 MeV is higher by about 3% than the Varnagy's[2] value at the same energy.

The aim of this work was to measure the $^{237}Np/$ ^{235}U fission cross-section ratio with a back-to-back chamber to clear up the discrepancies in the previous data.

EXPERIMENTAL PROCEDURE.

A schematic drawing of the experimental arrangement is shown in Fig. 1.

The fission detector was a low-mass, double ionization chamber filled with argon gas of about 10⁵ Pa. The cylindrical fission chamber was made of 0.5 mm aluminium. Both parts of the chamber were operated at 500 V with a plate separation of 6 mm. This chamber was place at a distance of 7 cm from the beam spot on the tritium target.

The irradiation of fissile samples were performed by fast neutrons produced in the ${}^3H(d,n){}^4He$ reaction using a 180 KeV accelerator. The intencity of the analyzed D^+ beam was about 70 μA . The energy of neutrons was changed by the emission

angle, i.e. the chamber was placed at different directions to the deuteron beam of about 10mm diam. The neutron energies and their spreads are given in Table 3 for the geometrical arrangement shown in Fig. 1.

The fissile sample were prepared at the Hlopin Institute in Leningrad(USSR) where, their isotopic compositions and thicknesses (summarized in table 1) have been determined. The ²³⁵U and ²³⁷Np, as tetrafluorides, were deposited onto Al holders(0.2 mm Thick and 40 mm diameter).

A rather good separation of the alpha particles and the fission fragments can be observed in the experimental spectrum (Fig. 2).

In order to obtain the total number of fission events in the deposits, a correction was performed for the loss of pulses under the base line by extrapolation of the fragment pulse-height spectrum to zero energy.

To determine the channel number corresponding to zero pulse height, the linearity of the systems was measured by a pulse generator.

A correction for the fission fragment absorved in the layer of fissionable nuclides was introduced.

Pair of 237 Np/ 235 U samples were placed back-to-back in the chamber. Two orientations were possible: first, when the 237 Np sample was placed near the neutron source, and second, when the 235 U sample was placed in the same position.

At each neutron energy, measurement of the relative fission

rate were made with both of these orientations.

When the results from the two orientations were averaged, the effect of geometry, neutron scattering in the support plates between the deposits and the momentum transfer were elimited.

The contributions of the thermal and epithermal neutron background to the fission event events in the case of 235 U has been determined by experiment using the 164 Dy(n, γ) 165 Dy reaction and the cadmium difference method. It was found that the background neutrons increased the cross section of 235 U(n,f) with about 1%. This effect is caused mainly by the epithermal neutrons in our experimental arrangement.

RESULT AND DISCUSSION.

The results obtained in this experiment are given in table 3. Table 2 list the corrections to the data and the magnitudes of errors. Root-mean-square errors were used in every case. The error of fission cross-section ratios is mainly due to the uncertainty in the determination of the total amounts of ²³⁷Np and ²³⁵U isotopes.

Our results in comparison with some previous data are shown in Fig. 3.

At it can be seen in the figure no significant energy dependence has been found in the fission cross-section ratio

for ²³⁷Np/ ²³⁶U around 14 MeV. The cross-section ratio obtained in this experiment is in good agreement with the result of Behrens and is lower in average with about 8% and 15% from those given by Várnagy et.al. and Lapenas, respectively.

ACKNOWLEDGEMENT

The authors are grateful to Mr. J.Szegedi for his assistance during the measurements.

REFERENCES

- [1].Behrens J.W. et.al., Nucl.Sci.Ing.80, (1982), 393-400.
- [2].Várnagy M.et.al., NIM, 196, (1982), 465-468.
- [3].Carlson G.M. et.al., Proc.Int.Conf.Nucl.cross-section for Science and Technology. Knoxville, Tennesse, October 22-26, 1979, NBS Special Publication (1980), 971-975.
- [4].Cross W.G. et.al., Nucl.Sci.Eng. 58, (1975), 377-386.
- [5].Lapenas A.A., Izmerenye spectry neytronov aktivationnym metodom, Izdatelstvo znatne, Riga, (1975).
- [6].Alkhazov I.D.et.al.Kiev Conference, Neytronnayia fizika, T3, (1977), 155.
- [7].White P.H.et.al., J. Nucl. Energ., 21, (1967), 671.
 - [8].Moat (ref. from W.Hart, AHSB(S), R169. Risley Warrington Lancashire (1969)).

[91.Handbook of nuclear activation data. TRS No. 273, 1AEA Vienna, (1987), 73.

[10].Adamov V.M. et.al., ref.3,page 995.

TABLE 1. Isotopic composition and masses of the fissile samples.

Sample	Isotopic	Isotopic composition(%)		mass(µg)
U	234 _U	²³⁵ U	saen	481
	0.001	99.9955	0.0036	
Np	²³⁷ Np	²³⁹ Pu	211 Am	
	99.9917	.0078	0.0005	418

TABLE 2. Range of correction factors and error.


Effect	Range of correction (%)	Range of Error (%)
statistical.	-	0.6 - 0.8
extrapolation of fission	2 - 4	0.4 - 0.8
spectrum to zero bias.		
fission fragment loss	1.8	0.18
in sample deposits.		
mass ratio.	, -	4.24
forward-backward	negligible	-
anisotropy.		
thermal and epithermal	1	-
neutrons.		
fission due to other	negligible	-
isotopes.		
total	4.0 - 5.4	4.3 - 4.4

TABLE 3. Cross-section ratio 237Np/235U

Angle	Neutron energy (MeV)	σ _{nf} (²³⁷ Np/ ²³⁵ U)	
00	14.80 ± 0.17	0.999 ± 0.043	
30 ⁰	14.70 ± 0.15	1.054 ± 0.046	
60°	14.45 ± 0.12	1.042 ± 0.045	
90°	14.12 ± 0.08	1.021 ± 0.044	
120°	13.75 ± 0.10	1.006 ± 0.043	

Pie de figuras.

- Fig. 1. Scattering-free irradiation arrangement used in the present work.
- Fig. 2. A pulse-height distribution of the fission fragments.
- fig. 3. Cross-section ratio for $^{237}Np/$ ^{235}U around 14 MeV.

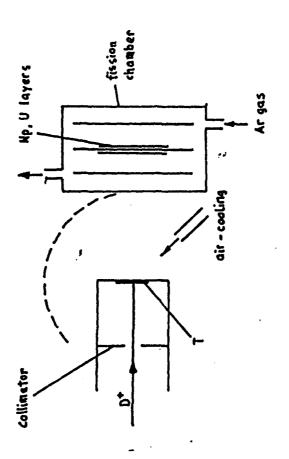


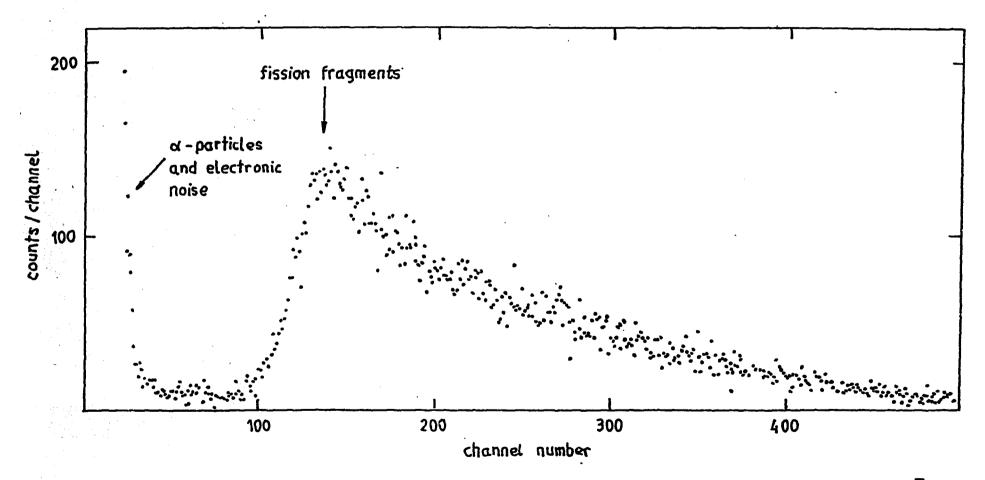


Fig 2.

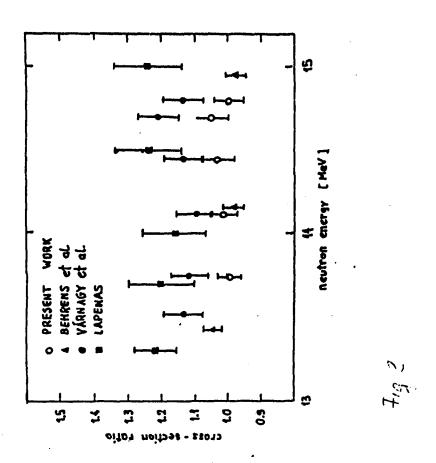

Titulo: Measurement of the fission cross-section ratio for $^{237}{\rm Np}/^{235}{\rm U}$ around 14 MeV neutron energies.

Autores: Luis Felipe Desdin Garcia. Instituto Superior de Ciencias y Tecnologia Nucleares. Quinta de los Molinos. Salvador Allende Esq. Luaces. C. Habana, Cuba.

Sandor Szegedi, Gyula Csikai. Instituto de Fisica Experimental. Universidad L. Kossuth. Debrecen, Hungria.

Clasisicación y descriptores:

A33.50

neutron generators, fission chambers, uranium 235, neptunium 237, fast fission

Impreso en el Centro de Información de la Energía Nuclear. La Habana, Cuba, diciembre 1989