

10  
9/25/91 JSD

SLAC-PUB--5642

DE91 018880

## PROGRESS AND COMMISSIONING OF THE SLD CHERENKOV RING IMAGING DETECTOR\*

K. Abe,<sup>a</sup> P. Antilogus,<sup>b</sup> D. Aston,<sup>b</sup> K. Baird,<sup>c</sup> A. Bean,<sup>d</sup> T. Bienz,<sup>b</sup> F. Bird,<sup>b</sup>  
 D. Caldwell,<sup>d</sup> M. Cavalli-Sforza,<sup>d</sup> P. Coyle,<sup>e</sup> D. Coyne,<sup>e</sup> S. Dasu,<sup>b</sup> S. Dolinsky,<sup>b</sup>  
 A. d'Oliveira,<sup>f</sup> J. Duboscq,<sup>d</sup> W. Dunwoodie,<sup>b</sup> P. Gagnon,<sup>e</sup> D. Hale,<sup>d</sup> G. Hallewell,<sup>b</sup>  
 K. Hasegawa,<sup>a</sup> J. Huber,<sup>d</sup> P. Jacques,<sup>e</sup> R. A. Johnson,<sup>f</sup> M. Kalelkar,<sup>e</sup> H. Kawahara,<sup>b</sup>  
 Y. Kwon,<sup>b</sup> D.W.G.S. Leith,<sup>b</sup> X. Liu,<sup>c</sup> A. Lu,<sup>d</sup> J. Martinez,<sup>f</sup> L. Mathys,<sup>d</sup>  
 S. McHugh,<sup>d</sup> B. Meadows,<sup>f</sup> D. Muller,<sup>b</sup> T. Nagamine,<sup>b</sup> M. Nussbaum,<sup>f</sup> T. J. Pavel,<sup>g</sup>  
 R. Plano,<sup>e</sup> B. Ratcliff,<sup>b</sup> P. Rensing,<sup>b</sup> A. K. S. Santha,<sup>f</sup> D. Schultz,<sup>b</sup> S. Shapiro,<sup>b</sup>  
 A. Shoup,<sup>f</sup> C. Simopoulos,<sup>b</sup> E. Solodov,<sup>b</sup> P. Stamer,<sup>e</sup> I. Stockdale,<sup>f</sup> F. Suekane,<sup>a</sup>  
 N. Toge,<sup>b</sup> J. Va'vra,<sup>b</sup> J. S. Whitaker,<sup>g</sup> D. A. Williams,<sup>e</sup> S. H. Williams,<sup>b</sup>  
 M. Witherell,<sup>d</sup> R. J. Wilson,<sup>g</sup> G. Word,<sup>e</sup> S. Yellin,<sup>d</sup> H. Yuta<sup>a</sup>

<sup>a</sup>Department of Physics, Tohoku University, Aramaki, Sendai 980, JAPAN

<sup>b</sup>Stanford Linear Accelerator Center, Stanford, CA 94309, USA

<sup>c</sup>Serip Physics Laboratory, Rutgers University, P.O. Box 849, Piscataway, NJ 08855, USA

<sup>d</sup>Department of Physics, University of California, Santa Barbara, CA 93106, USA

<sup>e</sup>Santa Cruz Institute for Particle Physics, University of California, Santa Cruz, CA 95064 USA

<sup>f</sup>Department of Physics, University of Cincinnati, Cincinnati, OH 45221, USA

<sup>g</sup>Department of Physics, Boston University, Boston, MA 02215, USA

### Abstract

We report the recent progress of the SLD Cherenkov Ring Imaging Detector. All of the individual components of the device (TPCs, mirrors, liquid radiator trays) have been completed and installed. Almost half of the electronics packages are installed and operational, and the data acquisition system has been commissioned. The liquid  $C_6F_{14}$  recirculation system is functioning. The drift gas supply systems are operating well with TMAE, and the gaseous freon  $C_5F_{12}$  recirculator is being brought on-line. Our monitor and control systems are fully functional. The commissioning of all 40 TPCs at full operating voltage has gone very smoothly. The system shows a remarkable immunity to the SLC backgrounds, and yields very clean events, while operating with a single electron sensitivity.

A large Cherenkov Ring Imaging Detector (CRID) has been constructed and is being commissioned for the SLD detector at the SLAC Linear Collider (SLC).<sup>1</sup> The barrel component of the CRID will provide SLD with excellent particle identification over the central 70% of its solid angle (Fig. 1). A combination of gaseous and liquid radiators allows  $\pi/K/p$  separation up to 30 GeV/c and  $e/\pi$  separation up to 6 GeV/c.

Presented at the Particle and Fields '91,  
 Vancouver, BC, Canada, August 18-22, 1991

\*Work supported in part by Department of Energy contract DE-AC03-76SF00515, and by National Science Foundation grants PHY88-13669 and PHY88-13018.

<sup>1</sup>Speaker

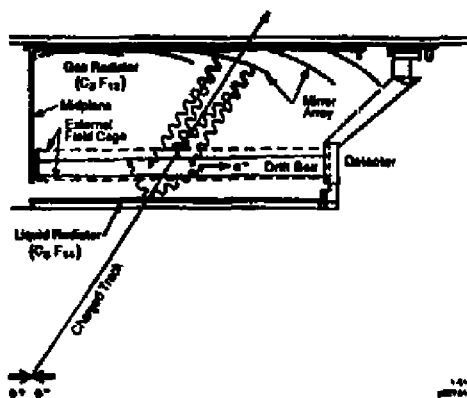


Fig. 1: Quarter section of the SLD barrel CRID showing its principal components.

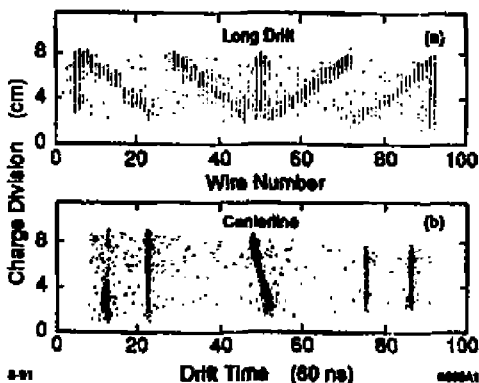


Fig. 2: Representative results from UV fibers on TPCs: (upper) in a plane parallel to the detector wire plane; and (lower) in a plane down the centerline of the TPC.

The Cherenkov photons are directed onto quartz-windowed time-projection chambers (TPCs), where they photo-ionize a 0.1% concentration of tetrakis(dimethylamino)ethylene (TMAE)<sup>2</sup> dopant in  $C_2H_6$  drift gas at atmospheric pressure. The resulting single photoelectrons are drifted up to 1.27 m to proportional wire planes of 7  $\mu$  carbon filaments with charge-division readout.

All of the individual components (400 mirrors,<sup>3</sup> 40 TPCs,<sup>4</sup> 40 liquid radiator trays) of the SLD barrel CRID have been completed and installed since November 1990. Electronics packages<sup>5</sup> have been installed and are operational on almost half of the 40 TPCs. All of the TPCs and detectors<sup>6</sup> have been commissioned at full voltage. The vessel has so far been filled with  $CO_2$  in place of the perfluoro-*n*-pentane ( $C_5F_{12}$ ) gaseous radiator. The liquid perfluoro-*n*-hexane ( $C_6F_{14}$ ) has been successfully recirculated through 6 of the 40 trays, while achieving low levels of  $O_2$  contamination.

The  $C_5F_{12}$  radiator gas is stored in the liquid phase at  $-80^\circ C$ , and recirculated through the CRID vessel by an electrically-driven turbine. The  $C_5F_{12}$  is cleaned of oxygen and water vapor by a mixture of activated copper and 13X molecular sieve.\* The temperature of the CRID vessel is maintained above the condensation point of  $C_5F_{12}$  ( $30^\circ C$ ). We have successfully recirculated a 50%  $C_5F_{12}$ /50%  $N_2$  mixture through one of our empty endcap CRID vessels (about 3000 l volume), while maintaining pressure to within 1 Torr above atmospheric pressure.

The drift gas delivery system has been operational for six months, using filtered CP-grade ethane<sup>†</sup> which we have found to have good UV transparency above 1600 Å. Our pressure control system<sup>7</sup> has been successfully operated since the installation of

\*Vacuum Atmospheres Co., Hawthorne, CA.

†Liquid Carbonic, San Carlos, CA; filters are 13X molecular sieve and Oxyorb from Messer Griesheim GMBH, D-4000 Düsseldorf 30, FRG.

the TPCs, and has kept pressure differences across the quartz windows no less than 2 Torr. The doping of the drift gas with TMAE is accomplished by bubbling the  $C_2H_6$  through liquid TMAE held at a known temperature. We have constructed two large bubblers, each capable of supplying TMAE for the designed ethane flow of 10 l/min.<sup>8</sup> Currently, we have operated the TMAE at temperatures of up to 15°C.

We purify the TMAE for operation by mixing it repeatedly with HPLC-grade water and letting contaminants<sup>6</sup> be washed away with the water. The TMAE is then dried and purified by gravity-draining through 3Å and 4Å molecular sieve and silica gel. About 5 l of TMAE, enough for two months of running at the nominal temperature of 28°C, have been purified in this manner.

The quality of the various CRID gases is monitored in a system with the capability of measuring electron lifetimes, UV transparency, and trace oxygen or water vapor content.<sup>7</sup> We measure the oxygen content in our drift gas returns to be typically near the 1 ppm level, and have found  $O_2$  content to be a sensitive indicator of leaks in the system. During TMAE running, we monitor the drift gas returns for electron lifetime, using a miniature ion chamber,<sup>9</sup> and we have found lifetimes consistent with those of the cleanest drift gas.

A system of UV fiber optics<sup>4</sup> is attached to all 40 TPCs for the purpose of calibrating drift velocities during operation, and measuring spatial distortions. It also allows us to monitor the detection efficiency for single photoelectrons and to calibrate the charge division. This system has been operated during data runs, and single photoelectrons from the fibers have been observed (see Fig. 2). By looking at the oblique fibers, charge division can be seen to be working well in our system.

The commissioning of all TPCs at full operating voltage has gone very smoothly. The system has shown a remarkable immunity to the SLC backgrounds and has yielded very clean events, with the CRID operating with a single electron sensitivity. Analyses are underway to study the alignment of the CRID with the SLD Central Drift Chamber, as well as to look for rings in the approximately 50  $Z^0$  candidates collected with  $C_6F_{14}$  radiator present.

#### References

1. SLD Design Report, SLAC-273, UC-43D (1984), and revisions.
2. R. T. Rewick et al., *Anal. Chem.* **60** (1989) 2095.
3. A. Bean et al., *Nucl. Instrum. Methods A* **300** (1991) 501.
4. P. Antilogus et al., SLAC-PUB-5365, contributed to 1990 IEEE Nucl. Sci. Symp., Arlington, VA (1991).
5. P. Antilogus et al., *IEEE Trans. Nucl. Sci.* NS-38 (1991) 403.
6. K. Abe et al., SLAC-PUB-5214, contributed to 7th Int'l Conf. on Instrum. for Colliding Beam Physics, Novosibirsk, USSR (1990).
7. P. Antilogus et al., *Nucl. Instrum. Methods A* **292** (1990) 136.
8. P. Coyle and T. Weber, SLD CRID Internal Note 34 (1987).
9. M. Cavalli-Sforza, SLD CRID Internal Note 15 (1986).

#### DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.