


UCRL-JC-118255  
PREPRINT

# Hohlraum Drive and Implosion Experiments on Nova

J. D.ilkenny, L. J. Suter, M. D. Cable, C. B. Darrow,  
T. R. Dittrich, S. W. Haan, B. A. Hammel, S. P. Hatchett,  
R. L. Kauffman, C. J. Keane, H. N. Kornblum, O. L. Landen,  
S. M. Lane, R. A. Lerche, T. J. Murphy, D. W. Phillion,  
J. L. Porter, L. J. Powers, D. B. R. R. Thiessen,  
R. E. Turner, R. Wallace, A. A. Hauer, and W. W. Hsing

This paper was prepared for submittal to the  
15th International Conference on Plasma Physics and  
Controlled Nuclear Fusion Research  
Madrid, Spain  
September 26-October 1, 1994

July 28, 1994

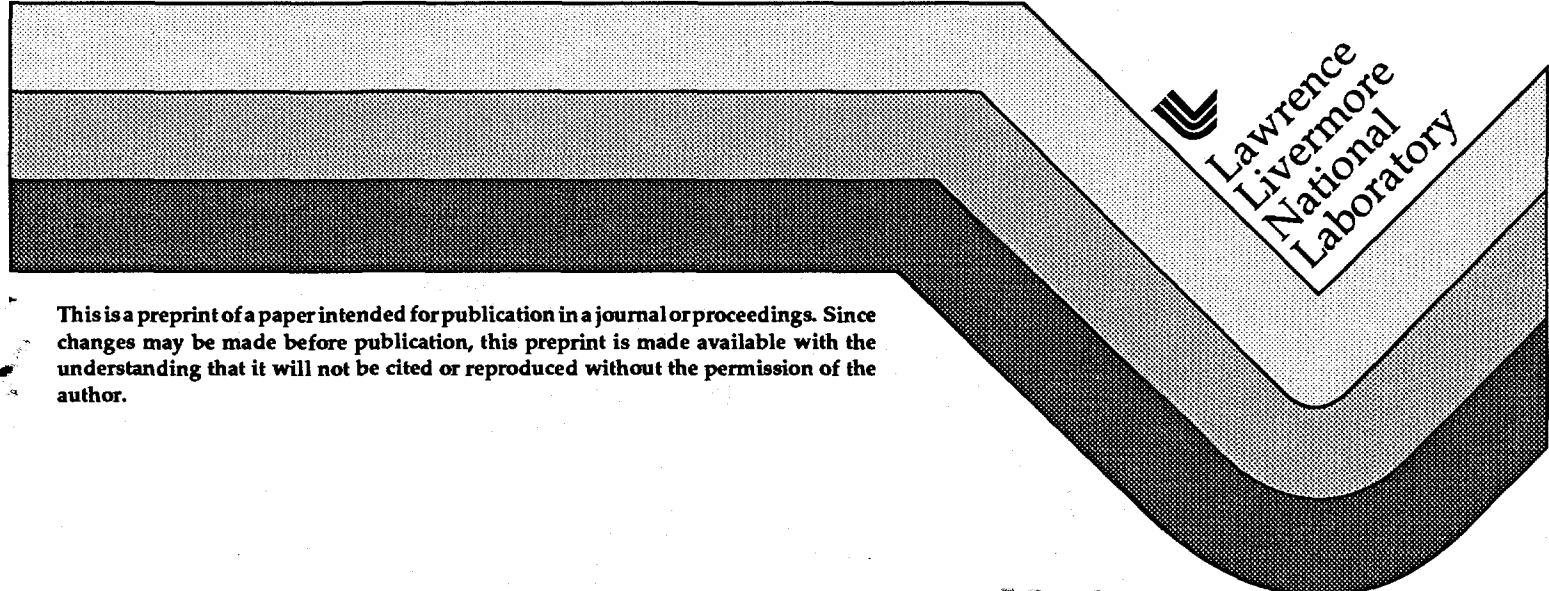

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

**MASTER**

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

*gtd*



#### DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

## Hohlraum Drive and Implosion Experiments on Nova\*

J.D. Kilkenny, L.J. Suter, M.D. Cable, C.B. Darrow, T.R. Dittrich,  
S.W. Haan, B.A. Hammel, S.P. Hatchett, R.L. Kauffman, C.J. Keane,  
H.N. Kornblum, O.L. Landen, S.M. Lane, R.A. Lerche, T.J. Murphy,  
D.W. Phillion, J.L. Porter, L.J. Powers, D.B. Ress, A.R. Thiessen,  
R.E. Turner, R. Wallace  
Lawrence Livermore National Laboratory, University of California  
Livermore, California 94551

A.A. Hauer, W.W. Hsing  
Los Alamos National Laboratory, University of California  
Los Alamos, New Mexico 87545

High gain inertial confinement fusion will most readily be achieved with hot spot ignition[1], where a small mass of gaseous fuel is compressed to a high density and heated to  $\sim 10$  keV, igniting a cooler, surrounding fuel. Recent laser driven implosions have achieved high shell density but without a well defined hot spot. X-ray driven implosions require high hohlraum drive pressure and symmetry. Eight years of experiments on Nova have led to a relatively comprehensive understanding of the energetics and symmetry of laser heated hohlraums. Relatively simple models can explain most of the features observed in our experiments. Detailed 2-D Lasnex simulations satisfactorily reproduce Nova's drive and symmetry scaling data bases, giving it credibility as a target design tool for the proposed National Ignition Facility (NIF). Implosion experiments achieved high convergence ratios (initial capsule radius/final fuel radius) in the range required for ignition scale capsules, and resulted in an imploded configuration of high density glass with hot gas fill, equivalent to the hot spot configuration of ignition scale capsules.

Nova hohlraums are typically 2.5 mm long, 1.6 mm diameter, gold cylinder with five laser beams entering through holes in the two circular surfaces. The laser entrance holes have diameters typically 50-75% of the hohlraum diameter. Radiation temperature is measured by measuring the absolute x-ray flux escaping from a diagnostic hole and by measuring the velocity of a radiation driven shock traveling through an aluminum "witness plate" mounted on the side of a hohlraum. Pure gold hohlraums as well as gold hohlraums lined with thin layers of either nickel or plastic have been used. Complementing these integrated experiments are detailed experiments to separately measure both wall losses and x-ray production in laser heated hohlraums. Overall, our modeling of all these experiments agrees well with the observations and provides insight into the physics of drive in laser heated hohlraums. A variety of pure gold drive experiments corroborate predicted high conversion efficiency in hohlraums. The decrease in drive caused by a low Z liner is due to more energy in the blow-off

plasma which, in turn, is due principally to the higher specific heat of a full ionized, low Z plasma.

We have also shot on Nova more than nine symmetry scaling data bases. We accurately predict how we must change Nova's beam pointing in order to achieve best symmetry with various pulse shapes. The need to change pointing with different pulse shapes is a result of motion of the laser deposition/hot spot emission region toward smaller polar angle (when viewed from the capsule position), caused by bulk plasma evolution. Complementing direct symmetry measurements, we have also directly observed the hot spots in hohlraums in agreement with calculations.

Our best implosion targets were x-ray driven, 180  $\mu\text{m}$  o.d., 5  $\mu\text{m}$  thick gas filled glass microballoons overcoated with 37  $\mu\text{m}$  of plastic. Fill pressures varied from 25-200 atm of deuterium. Ten Nova beams (21 kJ, 0.35  $\mu\text{m}$ ) produced a uniform x-ray flux on the capsule surface. The radiation brightness temperature had a 100 eV foot, rising to 210 eV peak, 1.6 nsec. chosen to optimize the pressure-density trajectory of the capsule compression, giving eight. Mbar ablation pressure at the foot of the pulse and 110 Mbar at the peak of the pulse.

Convergence of these capsules is limited by the x-ray drive symmetry both inherent to the hohlraum and due to random variations from imprecise laser beam-to-beam power balance and pointing. We maintain tolerances of 8% (RMS) beam-to-beam power balance during the foot of the laser pulse and 4% power balance during the peak, giving an x-ray power balance on the capsule uniform to 2% (RMS) at peak power and 4% in the foot.

Burn averaged fuel density and capsule convergence were determined from measurement of fuel areal density, giving densities up to  $19 \pm 1.5 \text{ gm/cm}^3$ , with convergences up to 24, in agreement with simulations. Primary neutron yield, pusher areal density, burn duration, beam time, and fuel ion temperature were also measured.

Primary neutron yields for these implosions were in agreement with simulations using the Haan mix model [2]. Measured fuel ion temperatures were  $0.9 \pm 0.4 \text{ keV}$  corresponding to a final fuel pressure of 16 Gbar. Glass shell densities were measured at  $160 \pm 20 \text{ g/cm}^3$ . The burn duration for the 100 atm capsules was measured to be  $50 \pm 15 \text{ ps}$  giving measured values of  $n\tau = 1.9 \times 10^{14} \text{ s/cm}^3$ .

In conclusion, the x-ray temperature and degree of symmetry in Nova implosions are accurately modeled. X-ray driven implosion have demonstrated radial convergences at a level close to the convergences required for a ignition capsules.

**\*This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under contract No. W-7405-ENG-48**

- [1] K. A. Brueckner and S. Jorna, *Rev Mod Phys* **46**, 325 (1974); J. D. Lindl, R. L. McCrory and E. M. Campbell, *Physics Today* **45**, 32 (1992).
- [2] S. Haan, *Phys Rev A* **39**, 5812 (1989).