

Database-assisted Distributed Spectrum Sharing

Xu Chen, *Member, IEEE* and Jianwei Huang, *Senior Member, IEEE*

Abstract—According to FCC’s ruling for white-space spectrum access, white-space devices are required to query a database to determine the spectrum availability. In this paper, we study the database-assisted distributed white-space access point (AP) network design. We first model the cooperative and non-cooperative channel selection problems among the APs as the system-wide throughput optimization and non-cooperative AP channel selection games, respectively, and design distributed AP channel selection algorithms that achieve system optimal point and Nash equilibrium, respectively. We then propose a state-based game formulation for the distributed AP association problem of the secondary users by taking the cost of mobility into account. We show that the state-based distributed AP association game has the finite improvement property, and design a distributed AP association algorithm that can converge to a state-based Nash equilibrium. Numerical results show that the algorithm is robust to the perturbation by secondary users’ dynamical leaving and entering the system.

Index Terms—Distributed spectrum sharing, geo-location database, game theory, Nash equilibrium.

I. INTRODUCTION

THE most recent FCC ruling requires that TV white-space devices must rely on a geo-location database to determine the spectrum availability [1]. In such a database-assisted architecture, the incumbents (primary licensed holders of TV spectrum) provide the database with the up-to-date information including TV tower transmission parameters and TV receiver protection requirements. Based on this information, the database will be able to tell a white-space device (secondary users (SUs) of TV spectrum) vacant TV channels at a particular location, given the white-space device’s transmission parameters such as the transmission power.

Although the database-assisted approach obviates the need of spectrum sensing, the task of developing a comprehensive and reliable database-assisted white-space network system remains challenging [2]. Motivated by the successful deployments of Wi-Fi over the unlicensed ISM bands, in this paper we consider an infrastructure-based white-space network, where there are multiple secondary access points (APs) operating on white spaces. Such an infrastructure-based architecture has been adopted in IEEE 802.22 standard

Manuscript received April 15, 2012; revised August 28, 2012 and November 6, 2012.

X. Chen is with the School of Electrical, Computer and Energy Engineering, Arizona State University, Tempe, Arizona, USA (e-mail: xchen179@asu.edu). The work for this paper was mainly done when he was with the Chinese University of Hong Kong.

J. Huang (corresponding author) is with the Network Communications and Economics Lab, Department of Information Engineering, the Chinese University of Hong Kong (e-mail: jwhuang@ie.cuhk.edu.hk).

This work is supported by the General Research Funds (Project Number CUHK 412710 and CUHK 412511) established under the University Grant Committee of the Hong Kong Special Administrative Region, China.

Digital Object Identifier 10.1109/JSAC.2013.1308.XX

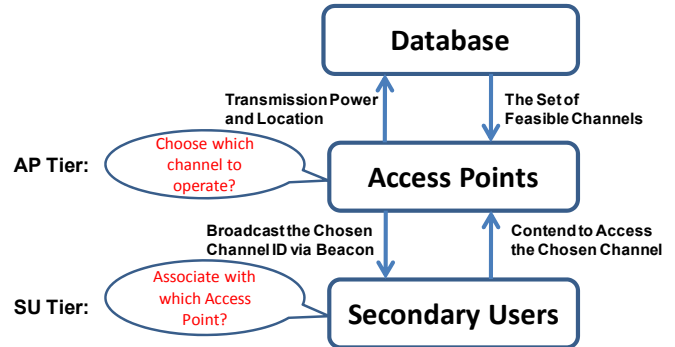


Fig. 1. System architecture of AP-based white-space networks.

[3] and Microsoft Redmond campus white-space networking experiment [2]. More specifically, each AP first sends the required information such as its location and the transmission power to the database via wire-line connections. The database then feeds back the set of vacant TV channels at the location of each AP. Afterwards, an AP chooses one feasible channel to serve the secondary users (i.e., unlicensed white-space user devices) within its transmission range.

The key challenges for such an infrastructure-based white-space network design are twofold (see Fig. 1 for an illustration). First, in the AP tier, each AP must choose a proper vacant channel to operate in order to avoid severe interference with other APs. Second, in the SU tier, when an AP is overloaded, a secondary user can improve its throughput by moving to and associating with another AP with less contending users. Each secondary user hence needs to decide which AP to associate with.

In this paper, for the AP tier, we first consider the scenario that all the APs are owned by one network operator and hence the APs are cooperative. We formulate the cooperative AP channel selection problem as the system-wide throughput optimization problem. We then consider the scenario that the APs are owned by different network operators and the interest of APs is not aligned. We model the distributed channel selection problem among the APs as a non-cooperative AP channel selection game. For the SU tier, we propose a state-based game framework to model the distributed AP association problem of the secondary users by taking the cost of mobility into account. The main results and contributions of this paper are as follows:

- *General formulation:* We formulate the cooperative and non-cooperative channel selection problems among the APs as system-wide throughput optimization and non-cooperative AP channel selection game, respectively, based on the physical interference model [4]. We then propose a state-based game framework to formulate the

distributed AP association problem of the secondary users and explicitly take the cost of mobility into account.

- *Existence of equilibrium solution and finite improvement property:* For the cooperative AP channel selection problem, the interest of APs is aligned and the system optimal solution that maximizes system-wide throughput always exists. For the non-cooperative AP channel selection game, we show that it is a potential game, and hence it has a Nash equilibrium and the finite improvement property. For the state-based distributed AP association game, we show that it also has a state-based Nash equilibrium and the finite improvement property.
- *Distributed algorithms for achieving equilibrium:* For the cooperative AP channel selection problem, we propose a cooperative channel selection algorithm that maximizes the system-wide throughput. For the non-cooperative AP channel selection game, we propose a non-cooperative AP channel selection algorithm that achieves a Nash equilibrium of the game. For the state-based distributed AP association game, we design a distributed AP association algorithm that converges to a state-based Nash equilibrium. Numerical results show that the algorithm is robust to the perturbation by secondary users' dynamical leaving and entering the system.

The rest of the paper is organized as follows. We introduce the cooperative and non-cooperative AP channel selection problems, and propose the cooperative and non-cooperative AP channel selection algorithms in Sections II and III, respectively. We present the distributed AP association game and distributed AP association algorithm in Section IV. We illustrate the performance of the proposed mechanisms through numerical results in Section V, and finally introduce the related work and conclude in Sections VI and VII, respectively. Due to the space limit, all the proofs of the results can be found in [5].

II. COOPERATIVE AP CHANNEL SELECTION

A. System Model

We first introduce the system model for the cooperative channel selection problem among the APs in the AP tier. Let $\mathcal{M} = \{1, 2, \dots, M\}$ denote the set of TV channels, and B denote the bandwidth of each channel (e.g., $B = 6$ MHz in the United States and $B = 8$ MHz in the European Union). We consider a set $\mathcal{N} = \{1, 2, \dots, N\}$ of APs that operate on the white spaces. Each AP $n \in \mathcal{N}$ has a specified transmission power P_n based on its coverage and primary user protection requirements.

Each AP n can acquire the information of the vacant channels at its location from the geo-location database. We denote $\mathcal{M}_n \subseteq \mathcal{M}$ as the set of feasible channels of AP n , $a_n \in \mathcal{M}_n$ as the channel chosen by AP n , and $\mathbf{a} = (a_1, \dots, a_N)$ as the channel selection profile of all APs. Then the worse-case down-link throughput (i.e., the throughput at the boundary of

the coverage area) of AP n can be computed according to the physical interference model [4] as

$$U_n(\mathbf{a}) = B \log_2 \left(1 + \frac{P_n/d_n^\theta}{\omega_{a_n}^n + \sum_{i \in \mathcal{N}/\{n\}: a_i = a_n} P_i/d_{in}^\theta} \right), \quad (1)$$

where θ is the path loss factor, d_n denotes the radius of the coverage area of AP n , and d_{in} denotes the distance between AP i and the benchmark location at the boundary of the coverage area of AP n . Furthermore, $\omega_{a_n}^n$ denotes the background noise power including the interference from incumbent users on the channel a_n , and $\sum_{i \in \mathcal{N}/\{n\}: a_i = a_n} P_i/d_{in}^\theta$ denotes the accumulated interference from other APs that choose the same channel a_n . Note that we assume that all APs only try to maximize the worse-case throughputs by proper channel selections, which do not depend on the number of its associated users. However, the secondary users can increase their data rates by moving to and associating with a less congested AP (see Section IV for detailed discussions). Note that our model also applies to the up-link case if the secondary users within an AP transmit with roughly the same power level.

B. Cooperative AP Channel Selection Algorithm

We first consider the case that all the APs try to maximize the system-wide throughput cooperatively. Such a cooperation is feasible when all the APs are owned by the same network operator. For example, the APs that are deployed in a university campus can coordinate to maximize the entire campus network throughput. Formally, the APs need to collectively determine the optimal channel selection profile \mathbf{a} such that the system-wide throughput is maximized, i.e.,

$$\max_{\mathbf{a} \in \Theta \triangleq \prod_{n=1}^N \mathcal{M}_n} \sum_{n=1}^N U_n(\mathbf{a}). \quad (2)$$

The problem (2) is a combinatorial optimization problem of finding the optimal channel selection profile over the discrete solution space Θ . In general, such a problem is very challenging to solve exactly especially when the size of network is large (i.e., the solution space Θ is large).

We next propose a cooperative channel selection algorithm that can approach the optimal system-wide throughput approximately. To proceed, we first write the problem (2) into the following equivalent problem:

$$\max_{(q_a: \mathbf{a} \in \Theta)} \sum_{\mathbf{a} \in \Theta} q_a \sum_{n=1}^N U_n(\mathbf{a}), \quad (3)$$

where q_a is the probability that channel selection profile \mathbf{a} is adopted. Obviously, the optimal solution to problem (3) is to choose the optimal channel selection profile with probability one. It is known from [6] that problem (3) can be approximated by the following convex optimization problem:

$$\max_{(q_a: \mathbf{a} \in \Theta)} \sum_{\mathbf{a} \in \Theta} q_a \sum_{n=1}^N U_n(\mathbf{a}) - \frac{1}{\gamma} \sum_{\mathbf{a} \in \Theta} q_a \log q_a, \quad (4)$$

where γ is the parameter that controls the approximation ratio. We see that when $\gamma \rightarrow \infty$, the problem (4) becomes exactly

¹Following the conventions in IEEE 802.22 standard [3] and Microsoft Redmond campus white-space networking experiment [2], we consider the case that each AP can select one channel to operate on. The case that each AP can select multiple channels to operate on will be considered in a future work.

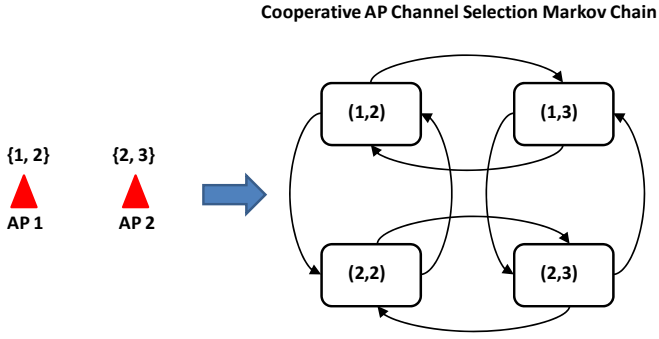


Fig. 2. System state transition diagram of the cooperative AP channel selection Markov chain by two APs. Figure on the left hand-side details the vacant channels of two APs. For example, AP 1 can choose channels 1 and 2 to transmit. Figure on the right hand-side shows the transition diagram of the Markov chain, and (a_1, a_2) denotes the system state with a_1 and a_2 being the channels chosen by APs 1 and 2, respectively. The direct transition between two system states is feasible if they are connected by a link.

Algorithm 1 Cooperative AP Channel Selection Algorithm

- 1: **initialization:**
 - 2: **choose** an initial channel $a_n \in \mathcal{M}_n$ randomly for each AP $n \in \mathcal{N}$.
 - 3: **acquire** the information of initial channel selections, transmission powers, and geo-locations from other APs by each AP $n \in \mathcal{N}$.
 - 4: **end initialization**
 - 5: **loop** for each iteration:
 - 6: Database **selects** an AP randomly and **informs** the selected AP to update its channel selection.
 - 7: **for** each AP $n \in \mathcal{N}$ in parallel **do**
 - 8: **if** the update command is received from the database **then**
 - 9: **calculate** the system throughput $\sum_{n=1}^N U_n(a_n, a_{-n})$ for each feasible channel selection $a_n \in \mathcal{M}_n$.
 - 10: **select** a channel $a_n \in \mathcal{M}_n$ with a probability of $\frac{\exp(\gamma \sum_{n=1}^N U_n(a_n, a_{-n}))}{\sum_{a' \in \mathcal{M}_n} \exp(\gamma \sum_{n=1}^N U_n(a', a_{-n}))}$.
 - 11: **broadcast** the chosen channel a_n to other APs.
 - 12: **else select** the original channel.
 - 13: **end if**
 - 14: **end for**
 - 15: **end loop**
-

the same as problem (3). That is, when $\gamma \rightarrow \infty$, the optimal point \mathbf{a}^* that maximizes the system throughput $\sum_{n=1}^N U_n(\mathbf{a})$ will be selected with probability one. A nice property of such an approximation in (4) is that we can obtain the close-form solution, which enables the distributed algorithm design later. More specifically, by the KKT condition [7], we can derive the optimal solution to problem (4) as

$$q_{\mathbf{a}^*} = \frac{\exp\left(\gamma \sum_{n=1}^N U_n(\mathbf{a}^*)\right)}{\sum_{\mathbf{a}' \in \Theta} \exp\left(\gamma \sum_{n=1}^N U_n(\mathbf{a}')\right)}. \quad (5)$$

Similarly to the spatial adaptive play in [8] and Gibbs sampling in [9], we then design a cooperative AP channel se-

lection algorithm by carefully coordinating APs' asynchronous channel selection updates to form a discrete-time Markov chain (with the system state as the channel selection profile \mathbf{a} of all APs). As long as the Markov chain converges to the stationary distribution as given in (5), we can approach the optimal channel selection profile that maximizes the system-wide throughput by setting a large enough parameter γ . The details of the algorithm are given in Algorithm 1. Here APs' asynchronous channel selection updates are scheduled by the database. In each iteration, one AP will be randomly chosen to update its channel selection. In this case, the direct transitions between two system states \mathbf{a} and \mathbf{a}' are feasible if these two system states differ by one and only one AP channel selection. As an example, the system state transition diagram of the cooperative AP channel selection Markov chain by two APs is shown in Fig. 2. We also denote the set of system states that can be transitioned directly from the state \mathbf{a} as $\Lambda_{\mathbf{a}} \triangleq \{\mathbf{a}' \in \Theta : |\{\mathbf{a} \cup \mathbf{a}'\} / \{\mathbf{a} \cap \mathbf{a}'\}| = 2\}$, where $|\cdot|$ denotes the size of a set.

Since each AP will be selected to update with a probability of $\frac{1}{N}$ and the selected AP will randomly choose a channel with a probability proportional to $\exp\left(\gamma \sum_{n=1}^N U_n(\mathbf{a})\right)$, then if $\mathbf{a}' \in \Lambda_{\mathbf{a}}$, the probability that the Markov chain transits from state \mathbf{a} to \mathbf{a}' is given as

$$q_{\mathbf{a}, \mathbf{a}'} = \frac{1}{N} \frac{\exp\left(\gamma \sum_{n=1}^N U_n(\mathbf{a}', a_{-n})\right)}{\sum_{\mathbf{a}' \in \Lambda_{\mathbf{a}}} \exp\left(\gamma \sum_{n=1}^N U_n(\mathbf{a}', a_{-n})\right)}. \quad (6)$$

Otherwise, we have $q_{\mathbf{a}, \mathbf{a}'} = 0$. We show in Theorem 1 that the cooperative AP channel selection Markov chain is time reversible. Time reversibility means that when tracing the Markov chain backwards, the stochastic behavior of the reverse Markov chain remains the same. A nice property of a time reversible Markov chain is that it always admits a unique stationary distribution, which guarantees the convergence of the cooperative AP channel selection algorithm.

Theorem 1. *The cooperative AP channel selection algorithm induces a time-reversible Markov chain with the unique stationary distribution as given in (5).*

According to Theorem 1, we can approach the system optimal point that maximizes the system-wide throughput by setting $\gamma \rightarrow \infty$ in the cooperative AP channel selection algorithm. In practice we can only implement a finite value of γ such that $\exp(\gamma \sum_{n=1}^N U_n(\mathbf{a}))$ does not exceed the range of the largest predefined real number on a computer. Numerical results show that when a large enough γ is adopted, the performance gap from the system optimum is very small.

We then analyze the computational complexity of the algorithm. In each iteration, one AP will be chosen for the channel selection update. Line 9 involves the summation of the throughputs of N APs for \mathcal{M}_n channels. Since $|\mathcal{M}_n| \leq M$, this step has the complexity of $\mathcal{O}(NM)$. Line 10 involves at most M summation and division operations and hence has a complexity of $\mathcal{O}(M)$. Line 11 has a complexity of $\mathcal{M}(1)$. Suppose that it takes C iterations for the algorithm to converge. Then total computational complexity of the algorithm is $\mathcal{O}(CNM)$.

III. NON-COOPERATIVE AP CHANNEL SELECTION

We next consider the case that the APs are owned by different network operators. Unlike the previous case where the interest of the APs is aligned in the cooperative channel selection, here each AP is generally selfish and only concerns about its own throughput maximization. Formally, given other APs' channel selections a_{-n} , the problem faced by an AP n is to choose a proper channel to maximize its own throughput, i.e.,

$$\max_{a_n \in \mathcal{M}_n} U_n(a_n, a_{-n}), \forall n \in \mathcal{N}.$$

The non-cooperative nature of the channel selection problem naturally leads to a formulation based on game theory, such that each AP can self organize into a mutually acceptable channel selection (**Nash equilibrium**) $\mathbf{a}^* = (a_1^*, a_2^*, \dots, a_N^*)$ with

$$a_n^* = \arg \max_{a_n \in \mathcal{M}_n} U_n(a_n, \mathbf{a}_{-n}^*), \forall n \in \mathcal{N}.$$

A. Non-cooperative AP Channel Selection Game

We now formulate the non-cooperative channel selection problem as a strategic game

$\Gamma = (\mathcal{N}, \{\mathcal{M}_n\}_{n \in \mathcal{N}}, \{U_n\}_{n \in \mathcal{N}})$, where \mathcal{N} is the set of APs, \mathcal{M}_n is the set of strategies for AP n , and U_n is the payoff function of AP n . We refer this as the non-cooperative AP channel selection game in the sequel.

We can show that it is a potential game, which is defined as

Definition 1 (Potential Game [10]). A game is called a potential game if it admits a potential function $\Phi(\mathbf{a})$ such that for every $n \in \mathcal{N}$ and $a_{-n} \in \prod_{i \neq n} \mathcal{M}_i$,

$$\begin{aligned} & \text{sgn} \left(\Phi(a'_n, a_{-n}) - \Phi(a_n, a_{-n}) \right) \\ &= \text{sgn} \left(U_n(a'_n, a_{-n}) - U_n(a_n, a_{-n}) \right), \end{aligned}$$

where $\text{sgn}(\cdot)$ is the sign function.

Definition 2 (Better Response Update[10]). The event where a player n changes to an action a'_n from the action a_n is a better response update if and only if $U_n(a'_n, a_{-n}) > U_n(a_n, a_{-n})$.

An appealing property of the potential game is that it admits the finite improvement property, such that any asynchronous better response update process (i.e., no more than one player updates the strategy at any given time) must be finite and leads to a Nash equilibrium [10].

To show that the non-cooperative AP channel selection game Γ is a potential game, we now consider a closely related game $\tilde{\Gamma} = (\mathcal{N}, \{\mathcal{M}_n\}_{n \in \mathcal{N}}, \{\tilde{U}_n\}_{n \in \mathcal{N}})$, where the new payoff functions are

$$\tilde{U}_n(\mathbf{a}) = \frac{P_n/d_n^\theta}{\omega_{a_n}^n + \sum_{i \in \mathcal{N}/\{n\}: a_i = a_n} P_i/d_{in}^\theta}. \quad (7)$$

Obviously, the utility function $U_n(\mathbf{a})$ can be obtained from the utility function $\tilde{U}_n(\mathbf{a})$ by the following monotone transformation

$$U_n(\mathbf{a}) = B \log_2 \left(1 + \tilde{U}_n(\mathbf{a}) \right). \quad (8)$$

Due to the property of monotone transformation, we have

Algorithm 2 Non-Cooperative AP Channel Selection Algorithm

- 1: **initialization:**
 - 2: **set** the initial channel $a_n(0) = m_n$ for each AP $n \in \mathcal{N}$, initial channel selection profile as $\mathbf{a}(0) = (a_1(0), \dots, a_N(0))$, and the stage index $t = 0$.
 - 3: **end initialization**

 - 4: **while** $\mathbf{a}(t)$ is not a Nash equilibrium **do**
 - 5: **for** AP $n = 1$ to N **do**
 - 6: **choose** the channel $a_n(t+1)$ that maximizes its own throughput according to (10).
 - 7: **end for**
 - 8: **set** channel selection profile as $\mathbf{a}(t+1) = (a_1(t+1), \dots, a_N(t+1))$ and the stage index $t = t+1$.
 - 9: **end while**
-

Lemma 1. If the modified game $\tilde{\Gamma}$ is a potential game, then the original non-cooperative AP channel selection game Γ is also a potential game with the same potential function.

This is due to the fact that $f(x) = B \log_2(1+x)$ is a monotonically strictly increasing function. For the modified game $\tilde{\Gamma}$, we show in Theorem 2 that it is a potential game with the following potential function

$$\Phi(\mathbf{a}) = - \sum_i \sum_{j \neq i} \frac{P_i P_j}{d_{ij}^\theta} I_{\{a_i = a_j\}} - 2 \sum_{i=1}^N P_i \omega_{a_i}^i, \quad (9)$$

where $I_{\{a_i = a_j\}} = 1$ if $a_i = a_j$, and $I_{\{a_i = a_j\}} = 0$ otherwise.

Theorem 2. The modified game $\tilde{\Gamma}$ is a potential game with the potential function $\Phi(\mathbf{a})$ as given in (9).

The proof is given in Appendix A. According to Lemma 1 and Theorem 2, we know that

Theorem 3. The non-cooperative AP channel selection game Γ is a potential game, which has a Nash equilibrium and the finite improvement property.

The result in Theorem 3 implies that any asynchronous better response update is guaranteed to reach a Nash equilibrium within a finite number of iterations. This motivates the algorithm design in Section III-B. Interestingly, according to the property of potential game, any channel selection profile \mathbf{a} that maximizes the potential function $\Phi(\mathbf{a})$ is a Nash equilibrium [10]. According to (9), the profile \mathbf{a}^* is also an efficient system-wide solution, since maximizing the potential function $\Phi(\mathbf{a})$ is equivalent to minimizing the total weighted interferences (with a weight of P_n) among all the APs.

B. Non-cooperative AP Channel Selection Algorithm

The purpose of designing this algorithm is to allow APs to select their channels in a distributed manner to achieve a mutually acceptable resource allocation, i.e., a Nash equilibrium. The key idea is to let APs asynchronously improve their channel selections according to the finite improvement property.

We assume that when an AP queries the geo-location database, the database will assign it with a unique ID indexed

as 1, 2, 3, For initialization, we let each AP n select the channel m_n that has the smallest channel ID index among its feasible channels \mathcal{M}_n , i.e., $a_n(0) = m_n$. Then based on the initialized channel selection profile $\mathbf{a}(0) = (a_1(0), \dots, a_N(0))$, each AP n in turn (according to the assigned IDs) carries out the best response update, i.e., select a channel $a_n(t+1)$ that maximizes its own throughput as

$$a_n(t+1) = \arg \max_{a \in \mathcal{M}_n} U_n(a, a_1(t+1), \dots, a_{n-1}(t+1), a_{n+1}(t), \dots, a_N(t)), \quad (10)$$

given the channel selections $\{a_1(t+1), \dots, a_{n-1}(t+1)\}$ of the updated APs, and the channel selections $\{a_{n+1}(t), \dots, a_N(t)\}$ of remaining APs that are not updated at the current stage t . Such update procedure continues until a Nash equilibrium is reached. Since the best response update is also a better response update, according to the finite improvement property, such asynchronous best response updates must achieve a Nash equilibrium within finite number of iterations. We summarize the non-cooperative AP channel selection algorithm in Algorithm 2. We then consider the computational complexity of the algorithm. Lines 5 to 7 involves N maximization operations and each maximization operation can be achieved by sorting over at most M values. This step typically has a complexity of $\mathcal{O}(NM \log M)$. Line 10 has the complexity of $\mathcal{O}(1)$. Suppose that it takes C iterations for the algorithm to converge. Then total computational complexity of the algorithm is $\mathcal{O}(CNM \log M)$.

The Algorithm 2 requires all APs to truthfully communicate with each other about their channel selections. When such a requirement is not feasible, each AP can independently implement Algorithm 2 by acquiring the assigned IDs, available channels, and transmission powers of other APs from the database. Note that such an off-line implementation is incentive compatible, since given other APs adhere to the algorithm and the update order is fixed, no AP has an incentive to deviate unilaterally from the algorithm (due to the deterministic Nash equilibrium output).

C. Price of Anarchy

We now study the efficiency of Nash equilibria of the non-cooperative AP channel selection Game. Following the definition of price of anarchy (PoA) in game theory [11], we will quantify the efficiency ratio of the worst-case Nash equilibrium over the optimal solution by the cooperative AP channel selection. Let Ξ be the set of Nash equilibria of the game. Then the PoA is defined as

$$\text{PoA} = \frac{\min_{\mathbf{a} \in \Xi} \sum_{n=1}^N U_n(\mathbf{a})}{\max_{\mathbf{a} \in \prod_{n=1}^N \mathcal{M}_n} \sum_{n=1}^N U_n(\mathbf{a})},$$

which is always not greater than 1. A larger PoA implies that the set of Nash equilibrium is more efficient (in the worst-case sense when comparing with the system optimal solution). Let $\bar{\omega}_n = \max_{m \in \mathcal{M}_n} \{\omega_m^n\}$ and $\underline{\omega}_n = \min_{m \in \mathcal{M}_n} \{\omega_m^n\}$. We can first show that

Lemma 2. *For the non-cooperative AP channel selection game, the throughput of an AP $n \in \mathcal{N}$ at a Nash equilibrium*

is no less than $B \log_2 \left(1 + \frac{P_n/d_n^\theta}{\bar{\omega}_n + (\sum_{i \in \mathcal{N}/\{n\}} P_i/d_{in}^\theta)/|\mathcal{M}_n|} \right)$, where $|\mathcal{M}_n|$ is the number of vacant channels for AP n .

Lemma 2 implies that at a Nash equilibrium each AP will receive an interference level that is not greater than the maximum possible interference level (i.e., $\sum_{i \in \mathcal{N}/\{n\}} P_i/d_{in}^\theta$) divided by the number of its available channels. That is, if more channels are available then the performance of Nash equilibria can be improved. According to Lemma 2, we know that

Corollary 1. *The PoA of the non-cooperative AP channel selection game is lower bounded by*

$$\frac{\sum_{n=1}^N \log_2 \left(1 + \frac{P_n/d_n^\theta}{\bar{\omega}_n + (\sum_{i \in \mathcal{N}/\{n\}} P_i/d_{in}^\theta)/|\mathcal{M}_n|} \right)}{\sum_{n=1}^N \log_2 \left(1 + \frac{P_n/d_n^\theta}{\underline{\omega}_n} \right)}.$$

The PoA characterizes the worst-case performance of Nash equilibria. Numerical results in Section VII demonstrate that the convergent Nash equilibrium of the proposed algorithm in Section III-B is often more efficient than what the PoA indicates and the performance loss is less than 8%, compared with the optimal solution by the cooperative AP channel selection.

IV. DISTRIBUTED AP ASSOCIATION BY MOBILE SECONDARY USERS

We now consider the distributed AP association problem among a set of mobile secondary users $\mathcal{K} = \{1, 2, \dots, K\}$ in the SU tier. Let x_n be the number of users that associate with AP n , which satisfies that $\sum_{n=1}^N x_n = K$. We assume that the APs' cooperative/non-cooperative channel selections in the AP tier and the users' AP associations in the SU tier are decoupled, i.e., APs only interested in guaranteeing their throughputs by proper channel selections and users can improve their data rates by proper AP associations. The load-aware AP channel selection will be considered in a future work.

A. Channel Contention within an AP

We first consider the channel contention when multiple secondary users associate with the same AP. Here we adopt a random backoff mechanism to resolve the channel contention. More specifically, the time is slotted with a contention stage being divided into λ_{\max} mini-slots. Each secondary user k executes the following two steps:

- 1) Count down according to a randomly and uniformly chosen integral backoff time (number of mini-slots) λ_k between 1 and λ_{\max} .
- 2) Once the timer expires, monitor the channel and exchange RTS/CTS messages with the AP in order to grab the channel if the channel is clear (i.e., no ongoing transmission). Note that if multiple users choose the same backoff mini-slot, a collision will occur with RTS/CTS transmissions and no users can grab the channel. Once the RTS/CTS message exchange goes through, then the AP starts to transmit the data packets to the user.

Since x_n users contend for the channel in AP n , the probability that a user k (out of these x_n users) grabs the channel successfully is

$$g(x_n) = Pr\{\lambda_k < \min_{i \neq k} \{\lambda_i\}\} = \sum_{\lambda=1}^{\lambda_{\max}} Pr\{\lambda_k = \lambda\} \\ \times Pr\{\lambda < \min_{i \neq k} \{\lambda_i\} | \lambda_k = \lambda\} = \sum_{\lambda=1}^{\lambda_{\max}} \frac{1}{\lambda_{\max}} \left(\frac{\lambda_{\max} - \lambda}{\lambda_{\max}} \right)^{x_n - 1}, \quad (11)$$

which is a decreasing function of the total number of contending users x_n . Then the average data rate of a secondary user k associating with AP n is given as

$$r_k = H_n^k U_n(\mathbf{a}^*) g(x_n), \quad (12)$$

where $U_n(\mathbf{a}^*)$ is the throughput at the boundary of the coverage area of AP n at the equilibrium channel selections \mathbf{a}^* by cooperative/non-cooperative AP channel selection algorithms, and $H_n^k \geq 1$ is the transmission gain of user k . Here the transmission gain is used to model user specific throughputs due to their heterogeneous channel conditions. For example, a user enjoys a better channel condition than all other users if it is the closest to the AP.

B. Distributed AP Association Game

Due to the channel contention within an AP n , the average data rate r_k of a secondary user k decreases with the total number of contending users x_n . To improve the data rate r_k , the secondary user k can choose to move to another AP n' with less users. However, in practices people may not prefer long distance movements (just for the sake of obtaining better communication experiences), which motivates us to take the cost of mobility into account. By defining the current location profile of all secondary users as a system state, we next formulate the distributed AP association problem as a **state-based game** [12] as follows:

- Player k : a secondary user from the set \mathcal{K} .
- Strategy b_k : choose an AP $n \in \mathcal{N}$ to associate with. We denote the strategy profile of all users as $\mathbf{b} \triangleq (b_1, \dots, b_K)$.
- State $\mathbf{s} \triangleq (s_1, \dots, s_K)$: the current locations (i.e., the associated APs) of all secondary users, where s_k denote the location of user k .
- State Transition $\mathbf{s}' = F(\mathbf{b}, \mathbf{s})$: in general the new state \mathbf{s}' is determined by the strategies \mathbf{b} of all secondary users and the original state \mathbf{s} , where $F(\cdot)$ denotes the state transition function. For our problem, we have that $F(\mathbf{b}, \mathbf{s}) = \mathbf{b}$, i.e., the new locations just depend on secondary users' AP choices and independent of the original system state.
- Payoff $V_k(\mathbf{b}, \mathbf{s})$: secondary user k 's utility obtained from the strategy profile \mathbf{b} in state \mathbf{s} . To take the cost of mobility into account, we define

$$V_k(\mathbf{b}, \mathbf{s}) = r_k - \delta_k d_{b_k s_k} \\ = H_{b_k}^k U_{b_k}(\mathbf{a}^*) g(x_{b_k}(\mathbf{b})) - \delta_k d_{b_k s_k}, \quad (13)$$

where $x_{b_k}(\mathbf{b})$ is the number of contending users associated with AP b_k under strategy profile \mathbf{b} , $\delta_k > 0$ is the factor representing the weight of mobility cost in

user k 's decision, and $d_{b_k s_k}$ is the distance of moving to AP b_k from AP s_k ($d_{b_k s_k} = 0$ if $b_k = s_k$). Note that the distance measure here can represent more general preference functions and can also be asymmetric. For example, we can define that $d_{b'_k b_k} > d_{b_k b'_k}$ if b_k is a popular shopping mall where users like to stay. The physical meaning of (13) is to balance the average data rate that a user can obtain from moving to a new AP b_k with the mobility cost by moving from its current associated AP s_k .

Since the state-based game is a generalized game theoretic framework (by regarding the classical strategic game as a state-based game with a constant state), we need an updated equilibrium concept. Here we follow the recent results in [12] and introduce the state-based Nash equilibrium. To proceed, we first define the set of reachable states $\Delta(\mathbf{b}^0, \mathbf{s}^0)$ starting from a strategy state pair $(\mathbf{b}^0, \mathbf{s}^0)$ as

$$\Delta(\mathbf{b}^0, \mathbf{s}^0) \triangleq \{\mathbf{s}^t : \mathbf{s}^t = F(\mathbf{b}^0, \mathbf{s}^{t-1}), \forall t \geq 1\}. \quad (14)$$

We then extend the definition of Nash equilibrium to the state-based game setting as follows.

Definition 3 (State-based Nash Equilibrium[12]). A strategy state pair $(\mathbf{b}^*, \mathbf{s}^*)$ is a state-based Nash equilibrium if 1) the state \mathbf{s}^* is reachable from $(\mathbf{b}^*, \mathbf{s}^*)$, i.e., $\mathbf{s}^* \in \Delta(\mathbf{b}^*, \mathbf{s}^*)$. 2) for every player $k \in \mathcal{K}$ and every state $\mathbf{s} \in \Delta(\mathbf{b}^*, \mathbf{s}^*)$, we have

$$V_k(\mathbf{b}^*, \mathbf{s}) = \max_{b_k} V_k(b_k, b_{-k}^*, \mathbf{s}). \quad (15)$$

The physical meaning of the state-based Nash equilibrium is that the state \mathbf{s}^* is recurrent and the strategy profile \mathbf{b}^* is the best response no matter how the game state evolves afterwards. In principle, the state-based game is a special case of the stochastic game, which is difficult to tackle. However, we are able to solve the distributed AP association game by exploiting its inherent structure property. A key observation is that, similarly to the classical potential game, the state-based distributed AP association game also admits a state-based potential function as

$$\Psi(\mathbf{b}, \mathbf{s}) = \sum_{k=1}^K \ln U_{b_k}(\mathbf{a}^*) + \sum_{n=1}^N \sum_{i=0}^{x_n(\mathbf{b})} \ln g(i) + \sum_{k=1}^K \ln H_{b_k}^k. \quad (16)$$

For the state-based potential function $\Psi(\mathbf{b}, \mathbf{s})$, we have

Lemma 3. For the state-based distributed AP association game, if a player $k \in \mathcal{K}$ performs a better response update b_k in a given state $\mathbf{s} = (s_k, s_{-k})$ with $V_k(b_k, s_{-k}, \mathbf{s}) > V_k(\mathbf{s}, \mathbf{s})$, we then have that $\Psi(b_k, s_{-k}, \mathbf{s}) > \Psi(\mathbf{s}, \mathbf{s})$.

The proof is given in Appendix B. Similarly to the classical potential game, we can also define the finite improvement property for the state-based game. Let $\mathbf{s}^t = (s_1^t, \dots, s_K^t)$ be the state of the game in the t -th update, and $\mathbf{b}^t = (b_1^t, \dots, b_K^t)$ be the strategy profile of all players in t -th update. According to the state transition, we have $\mathbf{s}^{t+1} = F(\mathbf{b}^t, \mathbf{s}^t)$. A path of the state-based game is a sequence $\rho = ((\mathbf{b}^0, \mathbf{s}^0), (\mathbf{b}^1, \mathbf{s}^1), \dots)$ such that for every $t \geq 1$ there exists a unique player, say player k_t , such that $\mathbf{b}^t = (b_{k_t}, s_{-k_t}^t)$ for some strategy $b_{k_t} \neq s_{k_t}^t$. $\rho = ((\mathbf{b}^0, \mathbf{s}^0), (\mathbf{b}^1, \mathbf{s}^1), \dots)$ is an improvement path if for all

$t \geq 1$ we have $V_{k_t}(\mathbf{b}^t, \mathbf{s}^t) > V_{k_t}(\mathbf{s}^t, \mathbf{s}^t)$, where k_t is the unique deviator at the t -th update. From the properties of the state-based potential function $\Psi(\mathbf{b}, \mathbf{s})$, we first show that every improvement path is finite.

Theorem 4. *For the state-based distributed AP association game, every improvement path is finite.*

Proof: For any improvement path $\rho = ((\mathbf{b}^0, \mathbf{s}^0), (\mathbf{b}^1, \mathbf{s}^1), \dots)$, we have $V_{k_0}(\mathbf{b}^0, \mathbf{s}^0) > V_{k_0}(\mathbf{s}^0, \mathbf{s}^0), V_{k_1}(\mathbf{b}^1, \mathbf{s}^1) > V_{k_1}(\mathbf{b}^0, \mathbf{s}^1), V_{k_2}(\mathbf{b}^2, \mathbf{s}^2) > V_{k_2}(\mathbf{b}^1, \mathbf{s}^2), \dots$, where $\mathbf{s}^1 = F(\mathbf{b}^0, \mathbf{s}^0) = \mathbf{b}^0, \mathbf{s}^2 = F(\mathbf{b}^1, \mathbf{s}^1) = \mathbf{b}^1$, and so on. From Lemma 3, we know that $\Psi(\mathbf{s}^0, \mathbf{s}^0) < \Psi(\mathbf{b}^0, \mathbf{s}^0), \Psi(\mathbf{b}^0, \mathbf{s}^0) < \Psi(\mathbf{b}^0, \mathbf{s}^1), \Psi(\mathbf{b}^0, \mathbf{s}^1) < \Psi(\mathbf{b}^1, \mathbf{s}^1), \Psi(\mathbf{b}^1, \mathbf{s}^1) < \Psi(\mathbf{b}^1, \mathbf{s}^2), \Psi(\mathbf{b}^1, \mathbf{s}^2) < \Psi(\mathbf{b}^2, \mathbf{s}^2), \dots$, which is increasing along the improvement path. Since $\Psi(\mathbf{b}, \mathbf{s}) < \infty$, then the improvement path $\rho = ((\mathbf{b}^0, \mathbf{s}^0), (\mathbf{b}^1, \mathbf{s}^1), \dots)$ must be finite. ■

Similarly to the classical potential game, we further show that any asynchronous better response update process also leads to a state-based Nash equilibrium.

Theorem 5. *For the state-based distributed AP association game, any asynchronous better response update process leads to a state-based Nash equilibrium $(\mathbf{b}^*, \mathbf{s}^*)$ with $\mathbf{s}^* = F(\mathbf{b}^*, \mathbf{s}^*)$.*

Proof: Suppose that an asynchronous better response update process $\rho = ((\mathbf{b}^0, \mathbf{s}^0), (\mathbf{b}^1, \mathbf{s}^1), \dots)$ terminates at the point $(\mathbf{b}^*, \mathbf{s}^*)$. In this case, we must have $\Psi(b_k^*, b_{-k}^*, \mathbf{s}^*) \geq \max_{b_k} \Psi(b_k, b_{-k}^*, \mathbf{s}^*)$, otherwise the improvement path ρ does not terminate at point $(\mathbf{b}^*, \mathbf{s}^*)$. At point $(\mathbf{b}^*, \mathbf{s}^*)$, we must also have that $V_k(b_k^*, b_{-k}^*, \mathbf{s}^*) \geq \max_{b_k} V_k(b_k, b_{-k}^*, \mathbf{s}^*)$ and $\mathbf{s}^* = \mathbf{b}^* = F(\mathbf{b}^*, \mathbf{s}^*)$, otherwise the potential function can be improved and thus the improvement path does not terminate here. Thus, we have $\mathbf{s}^* \in \Delta(\mathbf{b}^*, \mathbf{s}^*)$ and $V_k(b_n^*, b_{-n}^*, \mathbf{s}) \geq \max_{b_n} V_k(b_n, b_{-n}^*, \mathbf{s}), \forall \mathbf{s} \in \Delta(\mathbf{b}^*, \mathbf{s}^*)$, which satisfies the conditions in Definition 3. ■

Since $\mathbf{s}^* = \mathbf{b}^* = F(\mathbf{b}^*, \mathbf{s}^*)$, Theorem 5 implies that the asynchronous better response update process leads to the state-based Nash equilibrium $(\mathbf{b}^*, \mathbf{b}^*)$, i.e., the equilibrium that all users are satisfied with the current AP associations \mathbf{b}^* and have no incentive to move anymore.

C. Distributed AP Association Algorithm

We next design a distributed AP association algorithm based on the finite improvement property shown in Theorem 4, which allows secondary users to select their associated APs in a distributed manner and achieve mutually acceptable AP associations, i.e., a state-based Nash equilibrium.

The key idea is to let secondary users asynchronously improve their AP selections. Unlike the non-cooperative AP channel selection update with the fixed order enforced by the geo-location database, the distributed AP association algorithm can not be deterministic. This is because that, as secondary users dynamically enter and leave the network, a deterministic distributed AP association algorithm according to the fixed strategy update order is not robust. Hence we will design a randomized algorithm by letting each secondary user countdown according to a timer value that follows the

Algorithm 3 Distributed AP Association Algorithm

- 1: **initialization:**
 - 2: **set** the mean η for strategy update countdown.
 - 3: **end initialization**

 - 4: **loop** for each secondary user $k \in \mathcal{K}$ in parallel:
 - 5: **generate** a timer value that follows the exponential distribution with the mean η .
 - 6: **count down** until the timer expires.
 - 7: **if** the timer expires **then**
 - 8: **acquire** the information of channel throughput $\{U_n(\mathbf{a}^*)\}$, the geo-location of APs, and user distribution $\{x_n\}_{n=1}^N$.
 - 9: **update** the strategy b_k^* according to the best response in (17).
 - 10: **end if**
 - 11: **end loop**
-

exponential distribution with a mean equal to η . Since the exponential distribution has support over $(0, \infty)$ and its probability density function is continuous, the probability that more than one users generate the same timer value and update their strategies simultaneously equals zero.² When a user k activates its strategy update at time t , the user can compute its best response strategy as

$$b_k^* = \arg \max_{b_k} V_k(b_k, b_{-k}^t, \mathbf{s}^t) = \arg \max_{b_k} H_{b_k}^k U_{b_k}(\mathbf{a}^*) g(x_{b_k}(\mathbf{b}^t)) - \delta_k d_{b_k s_k}, \quad (17)$$

which requires the information of user distribution $(x_1(\mathbf{b}^t), \dots, x_N(\mathbf{b}^t))$ at time t , the throughput $U_n(\mathbf{a}^*)$, and geo-locations of all the APs. We then consider the computational complexity of the algorithm. For each iteration of each user, Lines 4 to 7 only involve random value generation and subtraction operation for count-down, and hence have a complexity of $\mathcal{O}(1)$. Line 8 involves information inquiry from N APs and hence has a complexity of $\mathcal{O}(N)$. Line 9 computes the best response strategy, which can be achieved by sorting at most N values and typically has a complexity of $\mathcal{O}(N \log N)$. Suppose that it takes C iterations for the algorithm to converge. Then total computational complexity of K users is $\mathcal{O}(CKN \log N)$. Similarly, we can show that the space complexity is $\mathcal{O}(KN)$.

To facilitate the best response update, we propose to setup a social database (accessible by all secondary users), wherein each AP reports its channel throughput $U_n(\mathbf{a}^*)$ and geo-location, and each secondary user $k' \in \mathcal{K}$ posts and shares its AP association $b_{k'}$ with other users in the manner like Twitter once it updates. Based on the information from the social database, a secondary user k can first figure out the user distribution $(x_1(\mathbf{b}^t), \dots, x_N(\mathbf{b}^t))$ as

$$x_n(\mathbf{b}^t) = \sum_{k'=1}^K I_{\{b_{k'}^t=n\}}, \forall n \in \mathcal{N}, \quad (18)$$

²The timer in practice is always finite, and the collision probability is not exactly zero. However, as long as the collision probability is very small, the following analysis is a very good approximation of the reality.

where $I_{\{b_{k'}^t=n\}} = 1$ if user k' associates with AP n , and $I_{\{b_{k'}^t=n\}} = 0$ otherwise. Based on the user distribution, the secondary user k can then compute the corresponding best response strategy according to (17).

The success of social database requires that each user is willing to share the information of its AP association. When this is not feasible, each AP n can estimate its associated user population x_n locally. Let $\bar{g}(x_n)$ denote the probability that no user among x_n associated with the same AP grabs the channel in a time slot τ . This can be computed as $\bar{g}(x_n) = 1 - x_n g(x_n)$, where $g(x_n)$ is given in (11). In a time slot τ , AP n can observe the information $I_{a_n^*}(\tau) \in \{1, 0\}$, i.e., whether the channel a_n^* is used by any users or not. Then over a long period that consists of L time slots, AP n can observe the outcome $\{I_{a_n^*}(\tau)\}_{\tau=1}^L$ and estimate $\bar{g}(x_n) = \frac{\sum_{\tau=1}^L I_{a_n^*}(\tau)}{L}$ by the sample-average. Since $I_{a_n^*}(\tau)$ is independently and identically distributed according to the probability $\bar{g}(x_n)$, according to the law of large numbers, the estimation will be accurate when the observation period length L is large enough. This is feasible in practices since user's mobility decision is often carried out at a large time scale (say every few minutes), compared with the time scale of a time slot (say 50 microseconds in the standard 802.11 system). Then AP n can obtain the number of its associated users x_n by solving that $x_n = \bar{g}^{-1}\left(\frac{\sum_{\tau=1}^L I_{a_n^*}(\tau)}{L}\right)$, and report it in the social database.

We summarize the distributed AP association algorithm in Algorithm 3. According to Theorem 5, such asynchronous best response update process must reach a state-based Nash equilibrium. Numerical results show that the algorithm is also robust to the dynamics of secondary users' leaving and entering the system.

V. SIMULATION RESULTS

In this part, we investigate the proposed AP channel selection and AP association algorithms by simulations.

A. Cooperative AP Channel Selection

We first implement the cooperative AP channel selection algorithm in Section II. We consider a white-space wireless system consisting of $M = 4$ channels and $N = 8$ APs, which are scattered across a square area of a length of 500 m (see Fig. 3). The bandwidth of each channel is 6 MHz, the noise power is $\omega_m^n = -100$ dBm, and the path loss factor $\theta = 4$. Each AP n operates with a specific transmission power P_n and has a different set of vacant channels by consulting the geo-location database (please refer to Fig. 3 for the details of these parameters). We set that the distance d_n between AP n and its associated boundary secondary user is 20 m.

We implement the cooperative channel selection algorithm with the parameter $\gamma = 0.2, 0.5$, and 0.85 , respectively. We show the dynamics of the time average throughputs of all the APs in Fig. 4 when $\gamma = 0.85$. It demonstrates the convergence of the cooperative channel selection algorithm. From Fig. 5, we see that the performance of the algorithm improves as the γ increases, and the convergence time also increases accordingly. When $\gamma = 0.85$, the performance loss of the cooperative

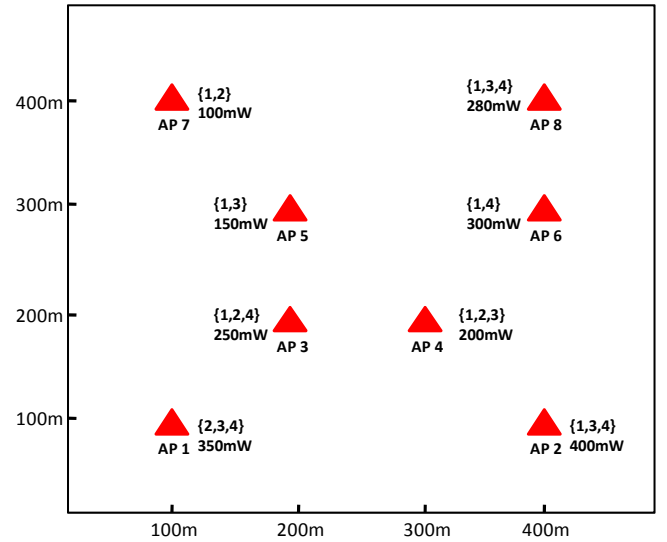


Fig. 3. A square area of a length of 500m with 8 scattered APs. Each AP has a set of vacant channels, and operates with a specific transmission power. For example, the available channels and transmission power of AP 1 are $\{2, 3, 4\}$ and 350 mW, respectively.

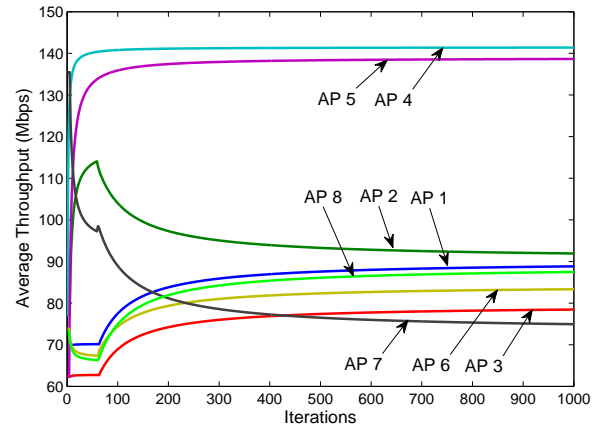


Fig. 4. Dynamics of APs' time average throughputs in cooperative channel selection with $\gamma = 0.85$.

channel selection algorithm is less than 1%, compared with the centralized optimal solution, i.e., $\max_{\mathbf{a} \in \Theta} \sum_{n=1}^N U_n(\mathbf{a})$. Moreover, the algorithm achieves more than 18% performance gain over the random channel selection scheme wherein the APs choose channels purely randomly.

B. Non-cooperative AP Channel Selection

We then implement the non-cooperative channel selection algorithm in Section III. We show the dynamics of the throughputs of all the APs in Fig. 6. We see that the algorithm converges to an equilibrium \mathbf{a}^* in less than 20 iterations. To verify that the equilibrium is a Nash equilibrium, we show the dynamics of the potential function Φ in Fig. 7. We see that the algorithm can lead the potential function to a maximum point, which is a Nash equilibrium according to the property of potential game. At the equilibrium \mathbf{a}^* , 8 APs achieve the throughputs $U_n(\mathbf{a}^*)$ of $\{101.4, 100.1, 82.6, 97.6, 83.2, 98.7, 85.6, 84.5\}$ Mbps, re-

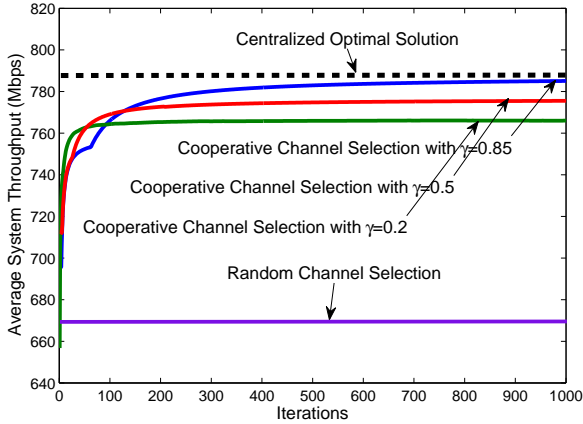


Fig. 5. Dynamics of time average system throughput.

spectively, and no AP has the incentive to deviate its channel selection unilaterally. Compared with cooperative AP channel selection algorithm, the performance loss of the non-cooperative channel selection algorithm is less than 7%. Such a performance loss is due to the selfishness of APs in the non-cooperative environment. However, the convergence time of non-cooperative AP channel selection algorithm is much shorter. This is because that in order to achieve the system optimal solution, the cooperative algorithm needs more time to randomly explore the whole set of feasible channel selections. While the non-cooperative channel selection algorithm achieves the Nash equilibrium by focusing on the subset of channel selections satisfying the finite improvement property.

We then further implement simulations with $N = 10, 20, \dots, 50$ APs being randomly scattered over the square area in Fig. 3, respectively. The number of TV channels $M = 50$ and 25 channels out of these 50 channels will be randomly chosen as the set of vacant channels \mathcal{M}_n for each AP n . We implement both non-cooperative and cooperative AP channel selection algorithms. The results are shown in Fig. 10. We see that when the number of APs is small (e.g., $N \leq 20$), the non-cooperative channel selection achieves the same performance as the cooperative case. This is due to the abundance of the spectrum resources. We also observe that the performance of the non-cooperative channel selection algorithm is less than 8% in all cases. This demonstrates the efficiency of the non-cooperative channel selection.

C. Distributed AP Association

We next implement the distributed AP association algorithm in Section IV. We consider $K = 20$ mobile secondary users who can move around and try to find a proper AP to associate with. Within an AP n , the worse-case throughput $U_n(\mathbf{a}^*)$ of AP n is computed according to the Nash equilibrium \mathbf{a}^* in Section V-B. For the channel contention by multiple secondary users, we set the number of backoff mini-slots $\lambda_{\max} = 10$.

We first show in Fig. 8 the dynamics of the distributed AP association algorithm with the random initial APs selections, users' transmission gains H_n^k being randomly selected from the set $\{1.0, 1.1, 1.2, 1.3, 1.4, 1.5\}$, and the mobility cost factor $\delta_k = 0.06$ Mbps/m. We see that the algorithm converges to

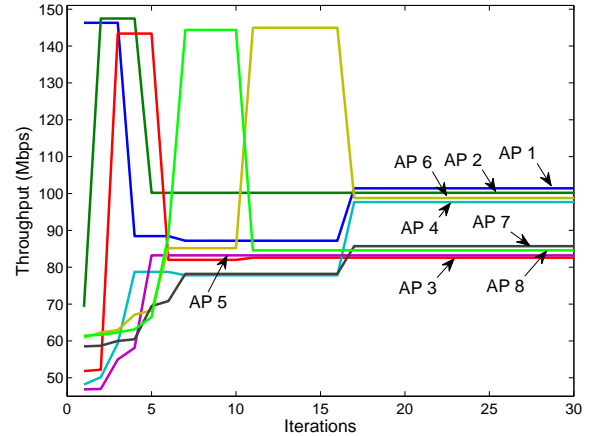
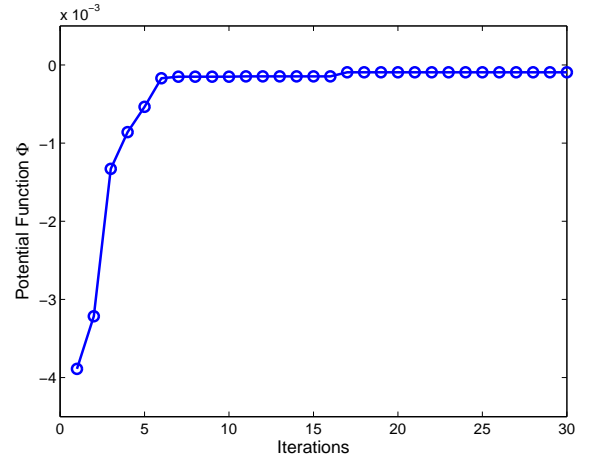


Fig. 6. Dynamics of non-cooperative AP channel selection.

Fig. 7. Dynamics of potential function value Φ corresponding to the dynamics in Fig. 6.

an equilibrium $(\mathbf{b}^*, \mathbf{b}^*)$ in less 30 iterations. We also show the dynamics of the state-based potential function Ψ in Fig. 9. We see that the equilibrium $(\mathbf{b}^*, \mathbf{b}^*)$ is a state-based Nash equilibrium, since the algorithm leads the state-based potential function to a maximum point.

To investigate the impact of the cost factor δ_k , we assume that all the users are initially associated with AP 1 with the same transmission gains $H_n^k = 1$ and we implement the distributed AP association algorithm with a mixture of two types of secondary users: high and low mobility cost factors. We see from Fig. 11 that users of low mobility cost will spread out to achieve better data rates, while most users of high mobility cost choose to stay in AP 1 and suffer from severe congestion.

We next investigate the robustness of the distributed AP association algorithm. We consider $K = 30$ mobile secondary users with the cost factor δ_k randomly generated from a uniform distribution in $(0, 0.2)$. At iteration $t = 200$ and 400, we let 10 users leave the system and 15 new users enter the system, respectively. The results in Figs. 12 and 13 show that the algorithm can quickly converge to a state-based Nash equilibrium after the perturbations occur. This verifies that the

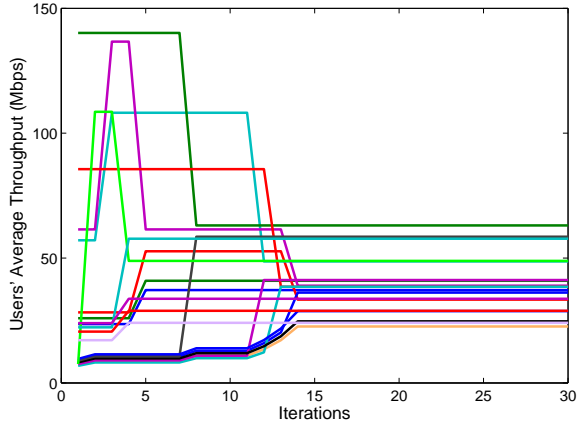
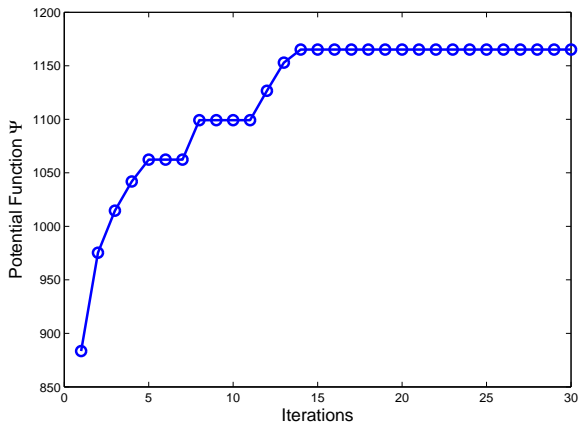


Fig. 8. Dynamics of distributed AP association.

Fig. 9. Dynamics of potential function value Ψ corresponding to the dynamics in Fig. 8.

distributed AP association algorithm is robust to the dynamics of secondary users' leaving and entering the system.

VI. RELATED WORK

Most research efforts in database-assisted white-space systems are devoted to the design of geo-location service. Gurney *et al.* in [13] calculated the spectrum availability based on the transmission power of the white-space devices. Karimi in [14] presented a method to derive location-specific maximum permitted emission levels for white space devices. Murty *et al.* in [2] proposed a framework to determine the vacant spectrum by using propagation model and terrain data. Nekovee in [15] studied the white-space availability and frequency composition in UK. Luo *et al.* in [16] proposed a database-based spectrum reservation mechanism for the white-space access.

For the white-space networking system design, many existing works focus on the experimental testbed implementation. Bahl *et al.* in [17] designed a single white-space AP system. Murty *et al.* in [2] addressed the client bootstrapping and mobility handling issues in white-space AP networks. Feng *et al.* in [18] considered the OFDM-based AP white-space network system design. Deb *et al.* in [19] presented a centralized white-space spectrum allocation algorithm. In this paper, we propose

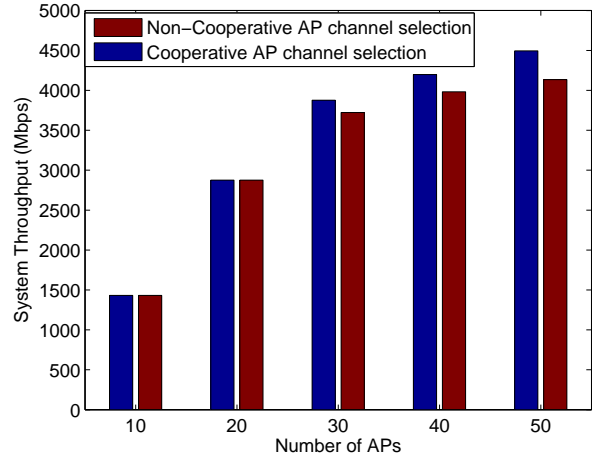
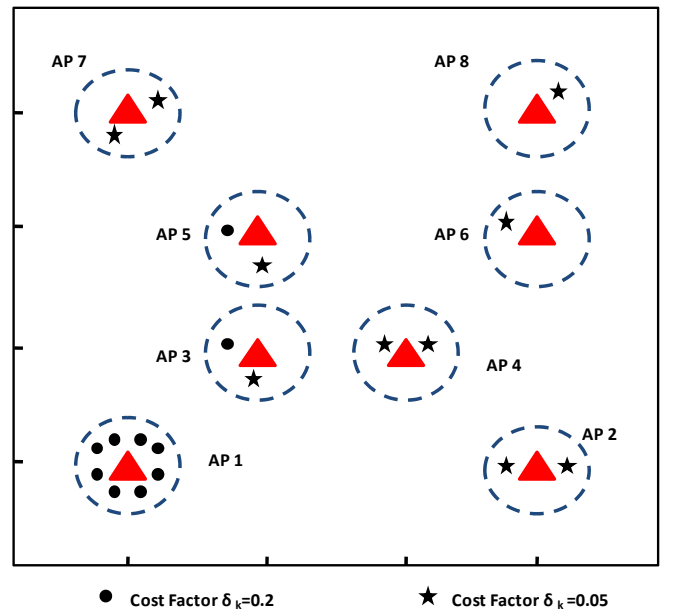
Fig. 10. System throughput by cooperative and non-cooperative AP channel selection with the number of APs $N = 10, 20, \dots, 50$, respectively.

Fig. 11. The equilibrium secondary user distribution with a mixture of two types of secondary users. The black dots represent the secondary users with a high cost factor, and the black stars represent the secondary users with a low cost factor.

a theoretic framework based on game theory for distributed resource allocation in white-space AP networks.

The game theory has been used to study wireless resource allocation problems in non-white-space infrastructure-based networks. Song *et al.* in [20] modeled the distributed channel allocation in mesh networks as a non-cooperative game, where each cell tries to minimize the interference received from other cells. Southwell *et al.* in [21] modeled the distributed channel selection problem with switching cost as a network congestion game. Chen and Huang in [22] proposed a spatial spectrum access game framework for distributed spectrum sharing with spatial reuse. Wang *et al.* in [23] proposed an auction approach for incentive-compatible spectrum resource allocation. Most previous works studied the competitive channel selection based on the protocol interference model where

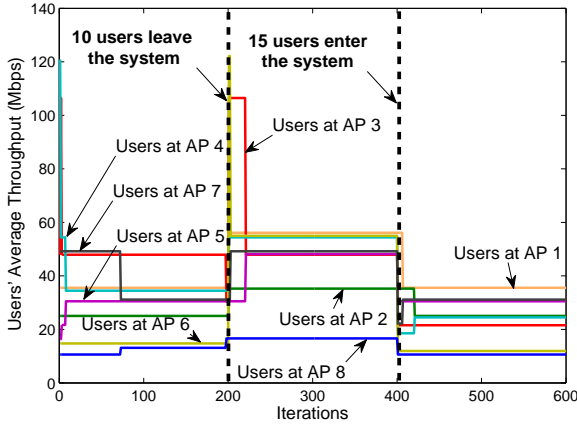


Fig. 12. Dynamics of distributed AP association with perturbations. At iteration $t = 200$ and 400 , 10 users leave the system and 15 new users enter the system, respectively.

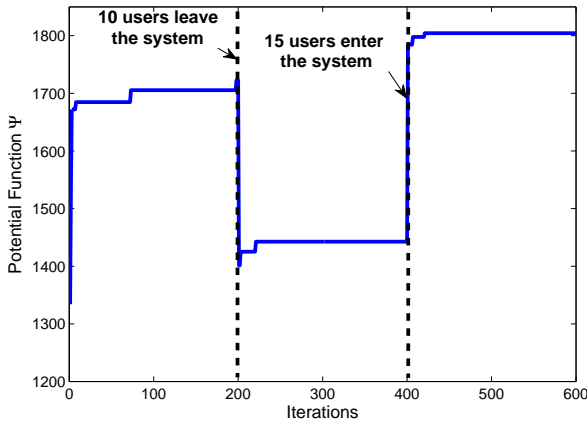


Fig. 13. Dynamics of potential function value Ψ with perturbations. At iteration $t = 200$ and 400 , 10 users leave the system and 15 new users enter the system, respectively.

two users can interfere with each other if they are linked by an interference edge on the interference graph. In this paper, we explore the competitive channel selections based on the physical interference model, which is not well studied in the literature. The most relevant work is [9], where Kauffmann *et al.* considered to minimize the total interferences received by all the APs by designating each AP a specific utility function to be optimized locally. In our paper, we consider the case that each AP is fully rational and tries to maximize its own throughput.

For the AP association problem, Gajić *et al.* in [24] and Duan *et al.* in [25] studied the pricing mechanisms to achieve efficient wireless service provider association solutions. Bejerano *et al.* in [26] address the load imbalance problem through the association control. Hong *et al.* in [27] investigated distributed AP association game with power control, by assuming that the chosen channels among APs are non-overlapping. These previous results focus on the case that users are stationary, and can associate with any AP. When users are mobile, Mittal *et al.* in [28] studied the distributed access point selection game by assuming that users are ho-

mogeneous with the same cost of mobility. Here we propose a state-based game framework to formulate the more general case that users have heterogeneous cost of mobility.

VII. CONCLUSION

In this paper, we consider the database-assisted white-space AP network design. We address the cooperative and non-cooperative channel selection problems among the APs and the distributed AP association problem of the secondary users. We propose the cooperative and non-cooperative AP channel selection algorithms and a distributed AP association algorithm, all of which that converge to the corresponding equilibrium globally. Numerical results show that the proposed algorithms are efficient, and are also robust to the perturbation by secondary users' dynamical leaving and entering the system.

For the future work, we are going to generalize the results to the mixture case that consists of both cooperative and non-cooperative APs. Multiple APs that belong to one network operator are cooperative with each other, but they may not cooperate with other APs that belong to a different network operator. It will be interesting to study the existence of Nash equilibrium and design distributed algorithms to achieve the equilibrium.

Although the distributed AP association algorithm can achieve the state-based Nash equilibrium wherein all users are satisfied given their mobility cost factors, the loads among different APs can be quite imbalanced when the mobility cost is high as demonstrated in the numerical results. Thus, how to design an incentive compatible mechanism such as pricing to achieve load balance among the APs with mobile secondary users will be very interesting and challenging.

APPENDIX

A. Proof of Theorem 2

Suppose that an AP k changes its channel a_k to a'_k such that the strategy profile changes from \mathbf{a} to \mathbf{a}' . We have that

$$\begin{aligned} \Phi(\mathbf{a}') - \Phi(\mathbf{a}) &= - \sum_{j \neq k} \frac{P_k P_j}{d_{kj}^\theta} I_{\{a'_k = a_j\}} + \sum_{j \neq k} \frac{P_k P_j}{d_{kj}^\theta} I_{\{a_k = a_j\}} \\ &\quad - \sum_{i \neq k} \frac{P_i P_k}{d_{ik}^\theta} I_{\{a_i = a'_k\}} + \sum_{i \neq k} \frac{P_i P_k}{d_{ik}^\theta} I_{\{a_i = a_k\}} - 2P_k \omega_{a'_k}^k + 2P_k \omega_{a_k}^k. \end{aligned}$$

Since $d_{ij} = d_{ji}$, we thus have that

$$\begin{aligned} \Phi(\mathbf{a}') - \Phi(\mathbf{a}) &= -2 \sum_{i \neq k} \frac{P_i P_k}{d_{ik}^\theta} I_{\{a_i = a'_k\}} + 2 \sum_{i \neq k} \frac{P_i P_k}{d_{ik}^\theta} I_{\{a_i = a_k\}} \\ &\quad - 2P_k \omega_{a'_k}^k + 2P_k \omega_{a_k}^k = -2P_k \left(\sum_{i \neq k: I_{\{a_i = a'_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{k, a'_k} \right) \\ &\quad + 2P_k \left(\sum_{i \neq k: I_{\{a_i = a_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{k, a_k} \right) \\ &= 2d_k^\theta \left(\sum_{i \neq k: I_{\{a_i = a'_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{k, a'_k} \right) \left(\sum_{i \neq k: I_{\{a_i = a_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{k, a_k} \right) \end{aligned}$$

$$\begin{aligned} & \times \left(\frac{P_k/d_k^\theta}{\sum_{i \neq k: I_{\{a_i=a'_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{a'_k}^k} - \frac{P_k/d_k^\theta}{\sum_{i \neq k: I_{\{a_i=a_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{a_k}^k} \right) \\ & = 2d_k^\theta \left(\sum_{i \neq k: I_{\{a_i=a'_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{a'_k}^k \right) \left(\sum_{i \neq k: I_{\{a_i=a_k\}}} \frac{P_i}{d_{ik}^\theta} + \omega_{a_k}^k \right) \\ & \times \left(\tilde{U}_k(a'_k, a_{-k}) - \tilde{U}_k(a_k, a_{-k}) \right), \end{aligned}$$

which completes the proof. \square

B. Proof of Lemma 3

First of all, the condition $V_k(b_k, s_{-k}, \mathbf{s}) > V_k(\mathbf{s}, \mathbf{s})$ implies that

$$\begin{aligned} & H_{b_k}^k U_{b_k}(\mathbf{a}^*) g(x_{b_k}(b_k, s_{-k})) - \delta_k d_{b_k s_k} \\ & > H_{s_k}^k U_{s_k}(\mathbf{a}^*) g(x_{s_k}(s_k, s_{-k})) - \delta_k d_{s_k s_k}. \end{aligned}$$

Since $d_{b_k s_k} > d_{s_k s_k} = 0$, we then have

$$H_{b_k}^k U_{b_k}(\mathbf{a}^*) g(x_{b_k}(b_k, s_{-k})) > H_{s_k}^k U_{s_k}(\mathbf{a}^*) g(x_{s_k}(s_k, s_{-k})). \quad (19)$$

Second, since $x_{b_k}(b_k, s_{-k}) = x_{b_k}(s_k, s_{-k}) + 1$ and $x_{s_k}(s_k, s_{-k}) = x_{s_k}(b_k, s_{-k}) + 1$, we have that

$$\begin{aligned} & \Psi(b_k, s_{-k}, \mathbf{s}) - \Psi(s_k, s_{-k}, \mathbf{s}) = \ln U_{b_k}(\mathbf{a}^*) - \ln U_{s_k}(\mathbf{a}^*) \\ & + \sum_{i=0}^{x_{b_k}(b_k, s_{-k})} \ln g(i) - \sum_{i=0}^{x_{b_k}(s_k, s_{-k})} \ln g(i) \\ & + \sum_{i=0}^{x_{s_k}(b_k, s_{-k})} \ln g(i) - \sum_{i=0}^{x_{s_k}(s_k, s_{-k})} \ln g(i) + \ln H_{b_k}^k - \ln H_{s_k}^k \\ & = \ln U_{b_k}(\mathbf{a}^*) - \ln U_{s_k}(\mathbf{a}^*) + \ln g(x_{b_k}(b_k, s_{-k})) \\ & - \ln g(x_{s_k}(s_k, s_{-k})) + \ln H_{b_k}^k - \ln H_{s_k}^k \\ & = \ln \left(H_{b_k}^k U_{b_k}(\mathbf{a}^*) g(x_{b_k}(b_k, s_{-k})) \right) \\ & - \ln \left(H_{s_k}^k U_{s_k}(\mathbf{a}^*) g(x_{s_k}(s_k, s_{-k})) \right). \quad (20) \end{aligned}$$

From (19) and (20), we must have that $\Psi(b_k, s_{-k}, \mathbf{s}) > \Psi(s_k, s_{-k}, \mathbf{s})$. \square

REFERENCES

- [1] FCC, "Second memorandum opinion and order," Sep. 23, 2010 [Online]. Available: http://transition.fcc.gov/Daily_Releases/Daily_Business/2010/db0923/FCC-10-174A1.pdf
- [2] R. Murty, R. Chandra, T. Moscibroda, and P. Bahl, "Senseless: A database-driven white spaces network," in *Proc. IEEE Symp. New Frontiers Dynamic Spectrum Access Netw. (DySpan)*, 2011.
- [3] IEEE 802.22 Working Group, "IEEE 802.22 draftv3.0," 2011 [Online]. Available: <http://www.ieee802.org/22/>
- [4] P. Gupta and P. R. Kumar, "The capacity of wireless networks," *IEEE Trans. Inf. Theory*, vol. 46, no. 2, pp. 388–404, 2000.
- [5] X. Chen and J. Huang, "Database-assisted distributed spectrum sharing," Tech. Rep., 2013 [Online]. Available: <http://arxiv.org/abs/1301.2848>
- [6] M. Chen, S. Liew, Z. Shao, and C. Kai, "Markov approximation for combinatorial network optimization," in *Proc. IEEE Conf. Computer Commun. (INFOCOM)*, 2010, pp. 1–9.
- [7] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, UK: Cambridge University Press, 2004.
- [8] H. Young, *Individual Strategy and Social Structure: An Evolutionary Theory of Institutions*. Princeton University Press, 2001.
- [9] B. Kauffmann, F. Baccelli, A. Chaintreau, V. Mhatre, K. Papagiannaki, and C. Diot, "Measurement-based self organization of interfering 802.11 wireless access networks," in *Proc. IEEE Conf. Computer Commun. (INFOCOM)*, 2007, pp. 1451–1459.

- [10] D. Monderer and L. S. Shapley, "Potential games," *Games Economic Behavior*, vol. 14, pp. 124–143, 1996.
- [11] T. Roughgarden and E. Tardos, "Introduction to the inefficiency of equilibria," *Algorithmic Game Theory*, vol. 17, pp. 443–459, 2007.
- [12] N. Li and J. R. Marden, "Designing games to handle coupled constraints," in *Proc. IEEE CDC*, 2010, pp. 250–255.
- [13] D. Gurney, G. Buchwald, L. Ecklund, S. Kuffner, and J. Grosspietsch, "Geo-location database techniques for incumbent protection in the TV white space," in *Proc. IEEE Symp. New Frontiers Dynamic Spectrum Access Netw. (DySpan)*, 2008.
- [14] H. R. Karimi, "Geolocation databases for white space devices in the UHF TV bands: Specification of maximum permitted emission levels," in *Proc. IEEE Symp. New Frontiers Dynamic Spectrum Access Netw. (DySpan)*, 2011.
- [15] M. Nekovee, "Quantifying the availability of TV white spaces for cognitive radio operation in the UK," Tech. Rep., 2009 [Online]. Available: <http://arxiv.org/abs/0906.3394v1>
- [16] Y. Luo, L. Gao, and J. Huan, "Spectrum broker by geo-location database," in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, Dec. 2012.
- [17] P. Bahl, R. Chandra, T. Moscibroda, R. Murty, and M. Welsh, "White space networking with WI-FI like connectivity," in *Proc. ACM SIGCOMM*, 2009, pp. 27–38.
- [18] X. Feng, J. Zhang, and Q. Zhang, "Database-assisted multi-ap network on TV white spaces: Architecture, spectrum allocation and AP discovery," in *Proc. IEEE Symp. New Frontiers Dynamic Spectrum Access Netw. (DySpan)*, 2011.
- [19] S. Deb, V. Srinivasan, and R. Maheshwari, "Dynamic spectrum access in DTW whitespaces: Design rules, architecture and algorithms," in *Proc. MOBICOM*, 2009, pp. 1–12.
- [20] Y. Song, C. Zhang, and Y. Fang, "Joint channel and power allocation in wireless mesh networks: A game theoretical perspective," *IEEE J. Sel. Areas Commun.*, vol. 26, no. 7, pp. 1149–1159, 2008.
- [21] R. Southwell, J. Huang, and X. Liu, "Spectrum mobility games," in *Proc. IEEE Conf. Computer Commun. (INFOCOM)*, 2012.
- [22] X. Chen and J. Huang, "Spatial spectrum access game: Nash equilibria and distributed learning," in *Proc. ACM Int. Symp. Mobile Ad Hoc Netw. Computing (MobiHoc)*, 2012.
- [23] X. Wang, Z. Li, P. Xu, Y. Xu, X. Gao, and H. Chen, "Spectrum sharing in cognitive radio networks: An auction-based approach," *IEEE Trans. Syst. Man Cybern. B: Cybern.*, vol. 40, no. 3, pp. 587–596, 2010.
- [24] V. Gajic, J. Huang, and B. Rimoldi, "Competition of wireless providers for atomic users: Equilibrium and social optimality," in *Proc. 47th Allerton Conf. Commun., Control, Computing*, 2009.
- [25] L. Duan, J. Huang, and B. Shou, "Competition with dynamic spectrum leasing," in *Proc. IEEE Symp. New Frontiers Dynamic Spectrum Access Netw. (DySpan)*, 2010.
- [26] Y. Bejerano, S. Han, and L. Li, "Fairness and load balancing in wireless LANs using association control," in *Proc. ACM 10th Int. Conf. Mobile Computing Netw.*, 2004, pp. 315–329.
- [27] M. Hong, A. Garcia, and J. Barrera, "Joint distributed access point selection and power allocation in cognitive radio networks," in *Proc. IEEE Conf. Computer Commun. (INFOCOM)*, 2011, pp. 2516–2524.
- [28] K. Mittal, E. M. Belding, and S. Suri, "A game-theoretic analysis of wireless access point selection by mobile users," *Computer Commun.*, vol. 31, no. 10, pp. 2049–2062, 2008.



Xu Chen (S'10-M'12) received the B.S. degree in electronic engineering from the South China University of Technology (Guangzhou, Guangdong, China) in 2008, and the Ph.D. degree in information engineering from the Chinese University of Hong Kong (Hong Kong, China) in 2012. Dr. Chen is currently a postdoctoral research fellow in the School of Electrical, Computer and Energy Engineering, Arizona State University (Tempe, Arizona, USA). His general research interests include cognitive radio networks, wireless resource allocation, network

economics, mobile social networks, and game theory. He is the recipient of the Honorable Mention Award (the first runner-up of the best paper award) in the IEEE International Conference on Intelligence and Security Informatics (ISI), 2010.



Jianwei Huang (S'01-M'06-SM'11) is an Assistant Professor in the Department of Information Engineering at the Chinese University of Hong Kong. He received the Ph.D. in electrical and computer engineering from Northwestern University (Evanston, IL, USA) in 2005. Dr. Huang currently leads the Network Communications and Economics Lab (ncl.ie.cuhk.edu.hk), with the main research focus on optimization, economics, and game theoretical analysis of networks. He is the recipient of the IEEE SmartGridComm Best Paper Award in

2012, the IEEE Marconi Prize Paper Award in Wireless Communications in 2011, the International Conference on Wireless Internet Best Paper Award in 2011, the IEEE GLOBECOM Best Paper Award in 2010, the Asia-Pacific Conference on Communications Best Paper Award in 2009, and the IEEE ComSoc Asia-Pacific Outstanding Young Researcher Award in 2009.

Dr. Huang is the Editor of the IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS - Cognitive Radio Series, Editor of the IEEE TRANS-

ACTIONS ON WIRELESS COMMUNICATION in the area of wireless networks and systems, Guest Editor of the IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS special issue on "Economics of Communication Networks and Systems," Lead Guest Editor of the IEEE JOURNAL OF SELECTED AREAS IN COMMUNICATIONS special issue on "Game Theory in Communication Systems," and Lead Guest Editor of *IEEE Communications Magazine* feature topic on "Communications Network Economics." Dr. Huang is the Chair of IEEE ComSoc Multimedia Communications Technical Committee, and Steering Committee Member of the IEEE TRANSACTIONS ON MULTIMEDIA and IEEE ICME. He has served as TPC Co-Chair of IEEE GLOBECOM Selected Areas of Communications Symposium (Game Theory for Communications Track) 2013, IEEE WiOpt (International Symposium on Modeling and Optimization in Mobile, Ad Hoc, and Wireless Networks) 2012, IEEE GLOBECOM Wireless Communications Symposium 2010, IWCMC (the International Wireless Communications and Mobile Computing) Mobile Computing Symposium 2010, and GameNets (the International Conference on Game Theory for Networks) 2009.