



**HAL**  
open science

# The electric location-routing problem with heterogeneous fleet: Formulation and Benders decomposition approach

Ammar Oulamara, Hatice Çalik, Caroline Prodhon, Said Salhi

## ► To cite this version:

Ammar Oulamara, Hatice Çalik, Caroline Prodhon, Said Salhi. The electric location-routing problem with heterogeneous fleet: Formulation and Benders decomposition approach. *Computers and Operations Research*, 2021, 131, pp.105251. 10.1016/j.cor.2021.105251 . hal-03561732

**HAL Id: hal-03561732**

**<https://hal.science/hal-03561732v1>**

Submitted on 22 Mar 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial 4.0 International License

# The electric location-routing problem with heterogeneous fleet: Formulation and Benders decomposition approach

Hatice Çalık<sup>d,a,\*</sup>, Ammar Oulamara<sup>a</sup>, Caroline Prodhon<sup>b</sup>, Said Salhi<sup>c</sup>

<sup>a</sup>Université de Lorraine, CNRS, LORIA, F-54000 Nancy, France

<sup>b</sup>ICD-LOSI, UMR CNRS 6281, Université de Technologie de Troyes, CS 42060, 10004 Troyes, France

<sup>c</sup>Centre for Logistics & Heuristic Optimisation (CLHO), Kent Business School, University of Kent, Canterbury CT2 7FS, UK

<sup>d</sup>KU Leuven, Department of Computer Science, CODeS, Belgium

---

## Abstract

In this paper, we focus on a problem that requires [the](#) location of recharging stations and [the](#) routing of electric vehicles in a goods distribution system. The goods are disseminated from a depot and distributed to the customers via [a heterogeneous fleet of electric vehicles](#) with limited capacity. Differently from the classical vehicle routing problem, the vehicles have battery restrictions that need to be recharged at some stations if a trip is longer than their range. The problem reduces to finding the optimal locations of the recharging stations and their number to minimize the total cost, which includes the routing cost, the recharging cost, and the fixed costs of opening stations and operating vehicles. We propose a novel mathematical formulation and an efficient Benders decomposition algorithm embedded into a two-phase general framework to solve this environmental logistics problem. Phase I solves a restricted problem to provide an upper bound for the original problem which is later solved in Phase II. Between the two phases, an intermediate processing procedure is introduced to reduce the computations of the Phase II problem. This is achieved by a combination of the Phase I upper bound and several lower bounds obtained via exploiting the underlying network structure. Our approach solves the problem in a general setting with non-identical stations and vehicles by allowing multiple visits to the stations and partial recharging. The computational study provides both managerial and methodological insights.

*Keywords:* Recharging Station Location, Electric Vehicle Routing, Environmental Logistics, Integer Programming, Benders Decomposition

---

## 1. Introduction

1 The transport sector is responsible, to a large extent, for energy consumption and greenhouse  
2 gas emissions. According to the European Environment Agency (2018), the energy consumption

---

\*Corresponding Author. Present address: KU Leuven, Department of Computer Science, CODeS, Belgium  
Email addresses: [hatice.calik@kuleuven.be](mailto:hatice.calik@kuleuven.be) (Hatice Çalık), [oulamara@loria.fr](mailto:oulamara@loria.fr) (Ammar Oulamara),  
[caroline.prodhon@utt.fr](mailto:caroline.prodhon@utt.fr) (Caroline Prodhon), [S.Salhi@kent.ac.uk](mailto:S.Salhi@kent.ac.uk) (Said Salhi)

3 of road transport increases by 32% from 1990 to 2016 in the EEA-33. To tackle environmental  
4 and energy challenges, several countries are considering the prospect of carbon neutrality over the  
5 next 30 years, with the objective of discouraging the sale of vehicles emitting greenhouse gases.  
6 The implementation of such a strategy has already begun with the introduction of low-emission  
7 zones (LEZ), where vehicles with higher emissions either cannot enter the area or have to pay a  
8 high penalty. For instance, the traffic pollution charge in London LEZ is £100 per day for larger  
9 vans and minibuses and rises to double this amount for lorries, buses, and coaches. Vehicles with  
10 alternative fuels, such as electric vehicles (EVs) and hydrogen vehicles, provide credible solutions  
11 for achieving the carbon neutrality target.

12 Unlike the hydrogen vehicle, which is currently at the experimental stage, and consequently  
13 having an exorbitant cost, the EV has reached an industrial maturity that makes it competitive  
14 compared to the combustion vehicle. However, as indicated by Davis and Figliozzi (2013) and Sassi  
15 and Oulamara (2017), EVs are still facing weaknesses related to their availability, purchase price,  
16 and battery management. From a logistics point of view, there are still weaknesses that are worth  
17 pointing at. These include

18 (i) The limited choice of light duty EVs offered by the car industry. These vehicles are mainly  
19 needed in the last-mile logistics.

20 (ii) The limited EV driving range. For instance, for light duty EVs, the range is between 120km  
21 and 180km. Note that the range can depend on topology of the road as well as weather and driving  
22 conditions.

23 (iii) The long charging time. The time to fully charge a vehicle can take up to 8 hours depending  
24 on the capacity of the battery pack and chargers' level.

25 (iv) The lack of availability of charging infrastructures in existing road networks.

26 Although all these weaknesses are manageable in practice, the cost of EV presents a barrier to  
27 their extensive use. An opportunity to reduce the vehicle's price is focusing on the development  
28 of those markets that are ready to adopt such a green-based strategy. Such markets allow a large-  
29 scale production of EVs which can consequently lead to the reduction of vehicle costs. Last-mile  
30 logistics provide this opportunity to speed up the market penetration of EVs. In such markets, an  
31 EV has the advantage of meeting the requirement of low-emission zones that are mainly located  
32 in city centers. Here, the distances covered in last-mile logistics are either within its range or it  
33 requires one charging session along the route only. Furthermore, even though the acquisition cost  
34 for EVs is usually higher than the combustion engine vehicles, this difference can be offset at the  
35 operational cost of EV usage. This is because a high utilization of EVs favors their TCO (Total  
36 Cost Ownership) since their operating costs (maintenance, tax, fuel, and depreciation) are low  
37 compared to those of their counterparts.

38 In this paper, we consider a goods distribution system that utilizes EVs. This is a system where  
39 the operating companies have access to their own recharging stations (private) or subscribe to a  
40 contract that warrants access (without queuing restrictions) to certain recharging stations which

41 have to be selected. Similar business models are considered by Yang and Sun (2015) for battery  
42 swap stations and by Schiffer and Walther (2017a,b) for recharging stations. In these types of  
43 business models, the operators need to decide on both the location and the routing aspects. As  
44 location and routing decisions are interdependent, they need to be handled simultaneously to  
45 operate an overall system in the most profitable way (Salhi and Rand, 1989). It may be argued  
46 that it is difficult to integrate operational decisions such as routing into strategic decisions like  
47 locating facilities. Though this is a critical issue, studies dealing with this dilemma showed that  
48 an intelligent way of incorporating the results of the integration can be very useful. For instance,  
49 Salhi and Nagy (1999) conduct a robustness analysis leading to a conclusion that integrated models  
50 constantly provide higher quality solutions and they are as reliable as ‘locate first - route second’  
51 methods.

52 In our study, we consider a heterogeneous fleet of vehicles to depart from a single depot. We  
53 also assume there is a sufficient number of charging stations and electrical grid capacity. This is to  
54 ensure that all vehicles are fully charged before their departure from the depot. However, we may  
55 need to recharge them during their trips if the total energy consumption to visit certain customers  
56 is larger than the battery capacity. Once a station is opened, it might be visited multiple times by  
57 any vehicle. As we allow partial recharging, the vehicles do not need to be fully recharged. Besides,  
58 we do not impose any restrictions on the types of stations or vehicles. In other words, we allow the  
59 use of heterogeneous vehicles and stations that might have different location-dependent costs. The  
60 problem is to decide on the number and location of stations, the number of vehicles needed, the  
61 amount of recharging needed for each vehicle, and the route(s) for visiting all the customers. The  
62 objective is to minimize the total cost which includes the variable cost of routing and recharging  
63 as well as the fixed costs of opening stations and operating vehicles.

64 In this study, we develop an exact method based on a new formulation which utilizes disag-  
65 gregated commodity flows to express sub-tour elimination and capacity restrictions (Yaman, 2006;  
66 Baldacci et al., 2008; Salhi et al., 1992; Salhi and Rand, 1993). There are several applications  
67 in the literature where flow based formulations with capacity constraints are successfully solved  
68 using a Benders decomposition approach. These include the hub location-routing problem stud-  
69 ied by de Camargo et al. (2013) and network design problems by Fortz and Poss (2009), Botton  
70 et al. (2013), and Calik et al. (2017). See also other relevant Benders decomposition applications  
71 for the location of EV recharging stations in car sharing systems (Çalik and Fortz, 2019), under  
72 probabilistic travel range (Lee and Han, 2017), and with plug-in hybrid EVs (Arslan and Karaşan,  
73 2016); in the survey by Costa (2005) for fixed-charge network design problems; and in the book  
74 by Birge and Louveaux (2011) for stochastic programming problems. This motivates us to apply  
75 a Benders decomposition algorithm leading to very successful results for solving the small size in-  
76 stances which are shown to be challenging by the preceding study of Schiffer and Walther (2017b).  
77 To the best of our knowledge, the heterogeneous fleet feature which makes the problem relatively  
78 much more challenging to handle by exact or heuristic methods has not been considered within the

79 location routing framework of combined recharging station location and EV routing problems. The  
80 mathematical models introduced by Schiffer and Walther (2017) for the homogeneous fleet vari-  
81 ants cannot be utilized or easily adapted to solve the heterogeneous fleet variants. Given that the  
82 models for homogeneous variants have difficulty in solving even small instances with 5 customers,  
83 there is a clear need for more efficient exact methods which can solve relatively larger instances  
84 (e.g. 10-15 customers) and enable performance evaluations of heuristic methods to be developed  
85 in the future.

86 Our methodological contributions are twofold:

- 87 - to propose a new mixed integer programming formulation for this strategic electric location-  
88 routing problem and
- 89 - to develop a Benders decomposition algorithm embedded in a novel two-phase framework to  
90 solve the problem to proven optimality by making use of several lower and upper bounds.

91 [The model and the algorithm developed are applicable to both versions of the problem with limited  
92 and unlimited number of vehicles.](#)

93 The rest of the paper is organized as follows: Section 2 gives an informative review on the  
94 related works. In Section 3, we provide the notation used throughout the paper and present  
95 our mathematical formulation. In Section 4, we propose our Benders decomposition algorithm  
96 followed by Sections 5 and 6 describing the implementation and the intermediate reduction process,  
97 respectively. In Section 7, we provide the setting and present the results of our computational study.  
98 We conclude in Section 8 with a summary of our findings and a highlight of some future research  
99 directions.

## 100 2. Related work

101 Location of recharging stations can be seen as a facility location problem. The purpose is  
102 then to decide on the optimal number and locations of facilities given the position of customers  
103 to serve. In this vein, He et al. (2016) present a case study in Beijing, China. Their objectives  
104 are to incorporate the local constraints of supply and demand on public EV charging stations  
105 into facility location models, and to compare the optimal locations from three different location  
106 models: the set covering model, the maximal covering location model, and the p-median model.  
107 Liu and Wang (2017) address the optimal location of multiple types of charging facilities, including  
108 dynamic wireless charging facilities and different levels of plug-in charging stations. Their tri-level  
109 program first treats the model as a black-box optimization, which is then solved by an efficient  
110 approximation model.

111 However, as raised in Salhi and Rand (1989), facility location and routing decisions are interde-  
112 pendent and should be tackled simultaneously. In the general case where both vehicles and depots  
113 are capacitated, the problem is known as the capacitated location routing problem (CLRP). The  
114 aim here is to i) define which depots must be opened, ii) assign each serviced node (customer)

115 to one and only one depot and, iii) route the vehicle to serve the nodes, in such a way that the  
116 sum of the depot cost and the total routing cost is minimized. Many papers appeared in the sub-  
117 ject and more particularly during the last decade, as shown in surveys by Nagy and Salhi (2007);  
118 Prodhon and Prins (2014), and Schneider and Drexl (2017). To solve this NP-hard problem to  
119 proven optimality, branch-and-cut (Belenguer et al., 2011) and set partitioning based (Akca et al.,  
120 2009; Contardo et al., 2013) algorithms are available in the literature. Additionally, several new  
121 efficient metaheuristics are proposed. These include a cooperative Lagrangean relaxation-granular  
122 tabu search heuristic by Prins et al. (2007), an adaptive large-neighborhood search (ALNS) by  
123 Hemmelmayr et al. (2012), and a three-phase matheuristic by Contardo et al. (2014). Other stud-  
124 ies cover a multiple ant colony optimization algorithm (Ting and Chen, 2013) and a two-phase  
125 hybrid heuristic (Escobar et al., 2013). Very recently, a tree-based search algorithm by Schneider  
126 and Löffler (2017) and a Genetic Algorithm by Lopes et al. (2016) are proposed.

127 The integration of the location of recharging stations with the routing decision, also called  
128 electric location-routing problem (ELRP), is relatively recent though it can lead to massive envi-  
129 ronmental benefits. To the best of our knowledge, the first study of simultaneous vehicle routing  
130 and charging station location for commercial EVs is presented in a conference paper in 2012 by  
131 Worley et al. (2012). Then, Yang and Sun (2015) introduce the interesting battery swap station  
132 location-routing problem, where the charge is completely fulfilled at each stop. The authors develop  
133 two heuristic approaches. The problem is revisited by Hof et al. (2017) who adapt an interesting  
134 and powerful adaptive variable neighborhood search (AVNS) heuristic originally dedicated to the  
135 vehicle routing problem (VRP) with intermediate depots. Recently, Zhang et al. (2019) introduce  
136 a battery swap station location-routing problem with stochastic demand and solve this problem by  
137 developing a hybrid algorithm combining binary particle swarm optimization and variable neigh-  
138 borhood search. Another relevant study by Yıldız et al. (2016) [introduces](#) a branch and price  
139 algorithm for routing and refueling station location problem.

140 The first paper dealing with partial recharge may come from Felipe et al. (2014), and is dedicated  
141 to a Green Vehicle Routing Problem (G-VRP). In G-VRP the fleet is composed of Alternative Fuel  
142 Vehicles (AFV) where, in addition to the routing of each EV, the amount of energy recharged and  
143 the technology used must also be determined. However, the location aspect is not considered.  
144 Constructive and improving heuristics are embedded in a Simulated Annealing framework. The  
145 partial recharging policies are then reused showing that they may considerably improve the routing  
146 decisions as noted by Keskin and Çatay (2016). Thus, Schiffer and Walther (2017b) extend the  
147 problem by including the location of charging stations which leads to the electric location routing  
148 problem with time windows and partial recharging (ELRP-TWPR). The authors focus on a problem  
149 with a single type of vehicle and multiple visits to the stations. They propose a mathematical  
150 formulation based on Miller-Tucker-Zemlin type constraints, supported by several preprocessing  
151 steps to eliminate the arcs that violate time windows, capacity, and battery restriction constraints.  
152 The Location Routing Problem with Intraroute Facilities which is a generalization of the ELRP-

153 TWPR is explored by Schiffer and Walther (2017a) where large instances are solved using an ALNS  
 154 which is enhanced by local search and dynamic programming components. A lower bounding  
 155 procedure integrated to this ALNS algorithm by Schiffer et al. (2018) provides improved results  
 156 for solving the ELRP-TWPR.

157 Our problem can be considered as a generalization of the electric vehicle routing problem  
 158 (EVRP) with location decisions or an electric location-routing problem (ELRP) with a heteroge-  
 159 neous fleet, multi-type stations, multi-visit, and partial recharging. The EVRP literature is not  
 160 extensively discussed here except those papers considering the location decisions. However, we  
 161 refer the reader to Pelletier et al. (2016) for an overview on the EVRP studies. In the next section  
 162 we provide the notation and a mathematical formulation of the problem.

### 163 3. Notation and Problem Formulation (PF)

164 Consider a given network with a set of customer locations and a set of potential charging station  
 165 locations, from which we are required to select a subset of stations. Each customer should be served  
 166 by a vehicle originating from the depot and each vehicle can perform a single trip. The vehicles  
 167 have a battery restriction and they have to visit one or more among the selected charging stations  
 168 before the battery is depleted if a trip longer than their range is to be traversed. In addition, we  
 169 have a fleet of heterogeneous vehicles with a limited number of vehicles of each type. **Note that all**  
 170 **our methods remain applicable to the special case with unlimited number of vehicles which is in**  
 171 **practice equivalent to the case where the number of vehicles for each type is equal to the number**  
 172 **of customers.** We first provide the notation and a scheme for allowing multiple visits which is then  
 173 followed by the new formulation.

#### 174 3.1. Notation

175 In this section, we list the parameters and the decision variables as follows:

176 *Parameters:*

177  $G = (N, A)$ : the given network.

178  $A$ : the arc set.

179  $N = I \cup J \cup \{0\}$ : the set of all nodes

180  $I$ : the set of customer locations

181  $J$ : the set of potential locations for charging stations

182  $0$ : the depot node

183  $K$ : the set of vehicles

184  $d_i > 0$ : the demand of client  $i \in I$

185  $c_{ij}$ : the routing cost of traversing arc  $(i, j) \in A$

186  $e_{ij}$ : the energy consumption on arc  $(i, j) \in A$  expressed in kWh

187  $f_j$ : the fixed cost of opening a charging station at node  $j \in J$

188  $r_k$ : the unit cost of recharging of vehicle  $k \in K$

189  $v_k$ : the fixed cost of operating vehicle  $k \in K$

190  $Q^k$ : the load capacity of vehicle  $k \in K$

191  $\beta^k$ : the battery capacity of vehicle  $k \in K$  expressed in kWh.

192 *Decision variables:*

193  $y_j = 1$  if station  $j \in J$  is open, 0 otherwise

194  $x_{ij}^k = 1$  if arc  $(i, j)$  is traversed by vehicle  $k \in K$ , 0 otherwise

195  $z_j^k$  is the amount of energy recharged at station  $j \in J$  for vehicle  $k \in K$

196  $b_{ij}^k$  is the battery level of vehicle  $k \in K$  at node  $i \in N$  before leaving for node  $j \in N$  expressed  
197 in kWh

198  $l_{ij}^k$  is the cumulative load of vehicle  $k \in K$  at node  $i \in N$  before leaving for node  $j \in N$ .

199 In the remaining of this paper, we assume  $I \subset J$  but all the methods can be easily adapted to  
200 the case where  $I \setminus J \neq \emptyset$  by simply defining  $y_j$  and  $z_j^k$  variables for all  $j \in I \cup J, k \in K$  and setting  
201  $y_j = z_j^k = 0, \forall j \in I \setminus J$ . For convenience, we define  $d_j = 0$  for  $j \in N \setminus I$ .

### 202 3.2. A novel mechanism that caters for multiple visits

203 In order to allow multiple visits to a station, we perform the following interesting and powerful  
204 modification on our input network. For each potential station, we create as many dummy copies  
205 as the number of customers (Steps 2-3 in Algorithm 1). If this potential station is also a demand  
206 node, the demand of the first copy is identical to the demand of the potential station whereas the  
207 demand of the remaining copies is set to zero. Similarly, the fixed cost of the first copy is identical  
208 to the fixed cost of the station whereas it is set to zero for the remaining copies (Step 4). The arc  
209 set of the modified network includes all the arcs of the original network. Additionally, all distinct  
210 node pairs in the modified network are connected via a direct arc except the pairs which are the  
211 copies of the same station (Step 5). Finally, we define an arc set for each vehicle which contains  
212 all arcs in the modified network whose energy consumption is not greater than the range of the  
213 vehicle and the total demand of its endpoints is not greater than the freight capacity of the vehicle  
214 (Step 6).

215 *Algorithm 1: Network modification*

216 Step 1: Let  $|I|$  be the number of demand nodes.

217 Step 2: Create  $|I|$  copies of each station.

218 Step 3: Form set  $J_j^A = \{j_1, j_2, \dots, j_{|I|}\}$  for each  $j \in J$  and  $J^A = \bigcup_{j \in J} J_j^A$ .

219 Step 4: For each  $j \in J$ , set  $f_{j_1} = f_j$ ;  $d_{j_1} = d_j$  and  $f_{j_i} = d_{j_i} = 0, i = 2, \dots, |I|$  where  
220  $j_1, \dots, j_{|I|} \in J_j^A$ .



221 Step 5: Let  $N^E = J^A \cup \{0\}$  and  $A^E = A \cup \{(i, j) : i, j \in N^E; i \neq j; \neg(i, j \in J_l^A \text{ for some}$   
 222  $l \in J)\}$ .

223 Step 6: Define  $A^k = \{(i, j) \in A^E : e_{ij} \leq \beta^k; d_i + d_j \leq Q^k\}$  for  $k \in K$ .

### 224 3.3. Mathematical formulation PF

The following is a commodity flow formulation of the problem:

$$\min \sum_{k \in K} \sum_{(i,j) \in A^k} c_{ij} x_{ij}^k + \sum_{k \in K} \sum_{j \in J^A} r_k z_j^k + \sum_{j \in J^A} f_j y_j + \sum_{k \in K} \sum_{(0,i) \in A^k} v_k x_{0i}^k \quad (1)$$

$$\text{s.t. } y_i \leq y_j, \quad i \in J_j^A : i \neq j \quad (2)$$

$$\sum_{i \in J^A} x_{0i}^k \leq 1, \quad k \in K \quad (3)$$

$$\sum_{k \in K} \sum_{(j,i) \in A^k} x_{ji}^k = 1, \quad i \in J^A : d_i > 0 \quad (4)$$

$$\sum_{(j,i) \in A^k} x_{ji}^k \leq y_i, \quad i \in J^A : d_i = 0, k \in K \quad (5)$$

$$\sum_{(i,j) \in A^k} x_{ij}^k - \sum_{(j,i) \in A^k} x_{ji}^k = 0, \quad i \in J^A, k \in K \quad (6)$$

$$\sum_{(i,j) \in A^k} (l_{ij}^k - d_i x_{ij}^k) = \sum_{(j,i) \in A^k} l_{ji}^k, \quad i \in J^A, \forall k \in K \quad (7)$$

$$\sum_{j \in J^A} l_{0j}^k = 0, \quad k \in K \quad (8)$$

$$l_{ij}^k \leq Q^k x_{ij}^k, \quad k \in K, (i, j) \in A^k \quad (9)$$

$$\sum_{(i,j) \in A^k} e_{ij} x_{ij}^k - \sum_{j \in J^A} z_j^k \leq \beta^k, \quad k \in K \quad (10)$$

$$\sum_{(i,j) \in A^k} b_{ij}^k = \sum_{(j,i) \in A^k} (b_{ji}^k - e_{ji} x_{ji}^k) + z_i^k, \quad i \in I \cup J^A, k \in K \quad (11)$$

$$z_j^k \leq \beta^k y_j, \quad j \in J^A, k \in K \quad (12)$$

$$z_j^k \leq \beta^k \sum_{(i,j) \in A^k} x_{ij}^k, \quad j \in J^A, k \in K \quad (13)$$

$$b_{0j}^k = \beta^k x_{0j}^k, \quad k \in K, (0, j) \in A^k \quad (14)$$

$$b_{ij}^k \leq \beta^k x_{ij}^k, \quad k \in K, (i, j) \in A^k \quad (15)$$

$$b_{ij}^k \geq e_{ij} x_{ij}^k, \quad k \in K, (i, j) \in A^k \quad (16)$$

$$y_j \in \{0, 1\}, \quad j \in J^A \quad (17)$$

$$x_{ij}^k \in \{0, 1\}, \quad k \in K, (i, j) \in A^k \quad (18)$$

$$l_{ij}^k \geq 0, \quad k \in K, (i, j) \in A^k \quad (19)$$

$$b_{ij}^k \geq 0, \quad k \in K, (i, j) \in A^k \quad (20)$$

$$z_j^k \geq 0, \quad j \in J^A, k \in K. \quad (21)$$

225 The objective function (1) minimizes the total sum of routing costs, charging costs, fixed costs of  
 226 opening stations, and fixed cost of using vehicles. If a zero-demand copy of a station is opened,  
 227 Constraints (2) force the original copy of this node to be opened and therefore, ensure that the costs  
 228 of the stations are counted in the objective function. By Constraints (3), we restrict the number of  
 229 trips by each vehicle to at most one. Constraints (3)-(9) together ensure that each client is served  
 230 by a unique vehicle that starts its trip at the depot and the capacities of vehicles are respected.  
 231 Constraints (5) ensure that a zero-demand copy of any station is visited only if that station is  
 232 open. We ensure the elimination of sub-tours for each vehicle trip via the load (flow) preservation  
 233 constraints (7)-(9). Note that Constraints (9) also ensure that the vehicle freight capacities are  
 234 always respected. Battery restriction on the vehicles are imposed by Constraints (10) and (11).  
 235 Constraints (12) and (13) avoid recharging of a vehicle at a node that has no station and that is  
 236 not visited by that vehicle, respectively.

237 We initialize the battery level for each vehicle to 100% by Constraints (14). For each arc-  
 238 vehicle pair, Constraints (15) restrict the amount of battery level with full battery level if the  
 239 arc is traversed by the vehicle and set it to zero otherwise; Constraints (16) make sure that the  
 240 battery level is larger than the energy consumption on the arc that will be traversed by the vehicle.  
 241 Finally, Constraints (17)-(21) represent the binary and non-negativity restrictions on the decision  
 242 variables.

#### 243 4. Benders Decomposition Algorithm (BDA)

244 Our mathematical formulation can be solved by using a Benders decomposition (Benders, 1962)  
 245 framework that we briefly described here. The details of our algorithm are presented next. The  
 246 classical Benders decomposition method aims to solve a mixed integer program (MIP) with a group  
 247 of integer variables and a group of continuous variables by decomposing the MIP into a master  
 248 problem (MP) with all integer variables and a series of subproblems with continuous variables.  
 249 For each feasible solution of MP, a subproblem (SP) is constructed by fixing the values of all the  
 250 integer variables in the MIP to the value obtained from the master problem. Each extreme ray  
 251 and extreme point of the dual of this SP provides a so called feasibility and an optimality cut,  
 252 respectively, for the MP. Since the full enumeration of the extreme points and extreme rays is  
 253 impractical, the cutting plane procedures are usually employed for the generation and the addition  
 254 of these cuts.

255 The classical Benders decomposition method could suffer from slow convergence especially if  
 256 the subproblem is large in size. On the other hand, the method would perform relatively efficiently  
 257 if the subproblem can be decomposed further into smaller and easy-to-solve subproblems as in

258 multi-commodity, multi-period, or multi-scenario problems (Birge and Louveaux, 2011). Moti-  
 259 vated by this fact, we aim to further decompose our problem into  $|K|$  smaller problems, each one  
 260 corresponding to a single vehicle trip. For this purpose, we decide to keep  $\mathbf{y}$ ,  $\mathbf{x}$ ,  $\mathbf{l}$  variables in the  
 261 master problem and  $\mathbf{z}$ ,  $\mathbf{b}$  variables in the subproblems. The separation method for the optimality  
 262 cuts plays a crucial role in efficient Benders implementations. To speed up our implementation,  
 263 we adopt the recently developed high-performing strategy of Çalı̇k and Fortz (2019) and modify  
 264 our formulation accordingly to obtain only feasibility cuts from the dual subproblems. In order  
 265 to achieve this, we introduce an additional non-negative decision variable  $w^k, \forall k \in K$  and make a  
 266 slight modification to our model to ensure that  $w^k$  takes value  $\sum_{j \in J^A} z_j^k, \forall k \in K$ . Moreover, we set  
 267  $x_{ij}^k = 0$  for  $(i, j) \notin A^k$ . The modified formulation (PF2), as given in what follows, is defined by  
 268 Constraints (2)-(21) and (22)-(24):

$$(PF2) \quad \min \sum_{k \in K} \sum_{i \in N^E} \sum_{j \in N^E: i \neq j} c_{ij} x_{ij}^k + \sum_{k \in K} r_k w^k + \sum_{j \in J^A} f_j y_j + \sum_{k \in K} \sum_{i \in J^A} v_k x_{0i}^k \quad (22)$$

$$\text{s.t. } w^k = \sum_{j \in J^A} z_j^k, \quad \forall k \in K \quad (23)$$

$$w^k \geq 0, \quad \forall k \in K \quad (24)$$

$$(2) - (21).$$

When solving PF2 in a Benders fashion, we employ a branch-and-cut framework which keeps  $\mathbf{y}$ ,  $\mathbf{x}$ ,  $\mathbf{l}$ ,  $\mathbf{w}$  variables in the master problem (MP) and  $\mathbf{z}$ ,  $\mathbf{b}$  variables in the subproblems.

$$(MP) \quad \min (22)$$

$$\text{s.t. } (2) - (9), (17) - (19), (24)$$

$$w^k \geq \sum_{i \in N^E} \sum_{j \in N^E: j \neq i} e_{ij} x_{ij}^k - \beta^k, \quad \forall k \in K. \quad (25)$$

Let  $(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  be the vector of variable values in the solution obtained from the master problem. One can easily observe that if  $\bar{w}^k = 0$ , then, no recharging is needed for the corresponding vehicle trip and  $(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  is feasible for PF2. On the other hand, if  $\bar{w}^k > 0$ , we construct and solve the dual of the subproblem  $SP_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  for every  $k \in K$ . Note that when  $\bar{w}^k > 0$ , an optimal solution to the original problem should satisfy Equation (32), which is helpful in the following mathematical manipulations leading to an efficient implementation.

$$SP_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}}) \quad \min 0 \quad (26)$$

$$\text{s.t. } \sum_{j \in J^A} z_j^k = \bar{w}^k, \quad (27)$$

$$z_j^k \leq \beta^k \bar{y}_j, \quad \forall j \in J^A \quad (28)$$

$$z_j^k \leq \beta^k \sum_{i \in N^E: i \neq j} \bar{x}_{ij}^k, \quad \forall j \in J^A \quad (29)$$

$$\sum_{j \in N^E: j \neq i} b_{ij}^k = \sum_{j \in N^E: j \neq i} (b_{ji}^k - e_{ji} \bar{x}_{ji}^k) + z_i^k, \quad \forall i \in J^A \quad (30)$$

$$b_{0j}^k = \beta^k \bar{x}_{0j}^k, \quad \forall j \in J^A \quad (31)$$

$$b_{j0}^k = e_{j0} \bar{x}_{j0}^k, \quad \forall j \in J^A \quad (32)$$

$$b_{ij}^k \leq \beta^k \bar{x}_{ij}^k, \quad \forall i, j \in N^E : i \neq j \quad (33)$$

$$b_{ij}^k \geq e_{ij} \bar{x}_{ij}^k, \quad \forall i, j \in N^E : i \neq j \quad (34)$$

$$b_{ij}^k \geq 0, \quad \forall i, j \in N^E : i \neq j \quad (35)$$

$$z_j^k \geq 0, \quad \forall j \in J^A \quad (36)$$

269 Note that Constraints (10) of PF is ensured by Constraints (25) and (27) as  $\sum_{j \in J^A} z_j^k = \bar{w}^k \geq$   
 270  $\sum_{i \in N^E} \sum_{j \in N^E: j \neq i} e_{ij} \bar{x}_{ij}^k - \beta^k, \forall k \in K$ . Moreover, we can replace equality (27) with inequality  $\sum_{j \in J^A} z_j^k \geq$   
 271  $\bar{w}^k$  due to Lemma 4.1.

272 **Lemma 4.1.** *If (28)-(36) is non-empty and  $\bar{w}^k > 0$ , then  $\sum_{j \in J^A} z_j^k = \sum_{i \in N^E} \sum_{j \in N^E: j \neq i} e_{ij} \bar{x}_{ij}^k - \beta^k$ .*

*Proof.*  $z_i^k = \sum_{j \in N^E: j \neq i} b_{ij}^k - \sum_{j \in N^E: j \neq i} (b_{ji}^k - e_{ji} \bar{x}_{ji}^k), \forall i \in J^A$  by (30). Moreover,  $\sum_{i \in J^A} \beta^k \bar{x}_{0i}^k = \beta^k$  and  $b_{j0}^k = e_{j0} \bar{x}_{j0}^k$  since  $\bar{w}^k > 0$ .

$$\begin{aligned} \sum_{i \in J^A} z_i^k &= \sum_{i \in J^A} \sum_{j \in N^E: j \neq i} b_{ij}^k - \sum_{i \in J^A} \sum_{j \in N^E: j \neq i} (b_{ji}^k - e_{ji} \bar{x}_{ji}^k) \\ &= \sum_{i \in J^A} b_{i0}^k - \sum_{i \in J^A} b_{0i}^k + \sum_{i \in J^A} \sum_{j \in J^A: i \neq j} (b_{ij}^k - b_{ji}^k) + \sum_{i \in J^A} \sum_{j \in N^E: j \neq i} e_{ji} \bar{x}_{ji}^k \\ &= \sum_{i \in J^A} e_{i0}^k \bar{x}_{i0}^k - \sum_{i \in J^A} \beta^k \bar{x}_{0i}^k + \sum_{i \in J^A} \sum_{j \in N^E: j \neq i} e_{ji} \bar{x}_{ji}^k \\ &= \sum_{i \in N^E} \sum_{j \in N^E: j \neq i} e_{ji} \bar{x}_{ji}^k - \beta^k \end{aligned}$$

273 □

After elimination of equality constraints and a few mathematical manipulations on the remaining subproblem, we obtain the following  $SP_k$  in canonical maximization form for each  $k \in K$ :

$$\max 0 \quad (37)$$

$$\text{s.t.} \quad - \sum_{j \in J} z_j^k \leq -\bar{w}^k, \quad (38)$$

$$z_j^k \leq \beta^k \bar{y}_j, \quad \forall j \in J^A \quad (39)$$

$$z_j^k \leq \beta^k \sum_{i \in J^A: i \neq j} \bar{x}_{ij}^k, \quad \forall j \in J^A \quad (40)$$

$$z_j^k + \sum_{i \in J^A: i \neq j} b_{ij}^k - \sum_{i \in J^A: i \neq j} b_{ji}^k \leq e_{j0}^k \bar{x}_{j0}^k - \beta^k \bar{x}_{0j}^k + \sum_{i \in N^E: i \neq j} e_{ij} \bar{x}_{ij}^k, \quad \forall j \in J^A \quad (41)$$

$$-z_j^k - \sum_{i \in J^A: i \neq j} b_{ij}^k + \sum_{i \in J^A: i \neq j} b_{ji}^k \leq \beta^k \bar{x}_{0j}^k - e_{j0} \bar{x}_{j0}^k - \sum_{i \in N^E: i \neq j} e_{ij} \bar{x}_{ij}^k, \quad \forall j \in J^A \quad (42)$$

$$b_{ij}^k \leq \beta^k \bar{x}_{ij}^k, \quad \forall i, j \in J^A : i \neq j \quad (43)$$

$$-b_{ij}^k \leq -e_{ij} \bar{x}_{ij}^k, \quad \forall i, j \in J^A : i \neq j \quad (44)$$

$$b_{ij}^k \geq 0, \quad \forall i, j \in J^A : i \neq j \quad (45)$$

$$z_j^k \geq 0, \quad \forall j \in J^A \quad (46)$$

Let  $\alpha, \delta_j, \pi_j, \gamma_j, \rho_j, \phi_{ij}, \epsilon_{ij}$  be the dual variables associated with constraints (38)-(44), respectively. Then, we can write the equivalent dual problem  $D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}})$  for each  $k \in K$  as follows:

$$\begin{aligned} D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}}) \quad \min \quad & -\bar{w}^k \alpha + \sum_{j \in J^A} \beta^k \bar{y}_j \delta_j + \sum_{i \in N^E} \sum_{j \in J^A: i \neq j} \beta^k \bar{x}_{ij}^k \pi_j \\ & + \sum_{j \in J^A} e_{j0} \bar{x}_{j0}^k \gamma_j - \sum_{j \in J^A} \beta^k \bar{x}_{0j}^k \gamma_j + \sum_{i \in N^E} \sum_{j \in J^A: i \neq j} e_{ij} \bar{x}_{ij}^k \gamma_j \\ & + \sum_{j \in J^A} \beta^k \bar{x}_{0j}^k \rho_j - \sum_{j \in J^A} e_{j0} \bar{x}_{j0}^k \rho_j - \sum_{i \in N^E} \sum_{j \in J^A: i \neq j} e_{ij} \bar{x}_{ij}^k \rho_j \\ & + \sum_{i \in J^A} \sum_{j \in J^A: i \neq j} \beta^k \bar{x}_{ij}^k \phi_{ij} - \sum_{i \in J^A} \sum_{j \in J^A: i \neq j} e_{ij} \bar{x}_{ij}^k \epsilon_{ij} \end{aligned} \quad (47)$$

$$\text{s.t.} \quad -\alpha + \delta_j + \pi_j + \gamma_j - \rho_j \geq 0, \quad \forall j \in J^A \quad (48)$$

$$-\gamma_i + \gamma_j + \rho_i - \rho_j + \phi_{ij} - \epsilon_{ij} \geq 0, \quad \forall i, j \in J^A : i \neq j \quad (49)$$

$$\alpha \geq 0, \quad (50)$$

$$\delta_j, \gamma_j, \pi_j, \rho_j \geq 0, \quad \forall j \in J^A \quad (51)$$

$$\phi_{ij}, \epsilon_{ij} \geq 0, \quad \forall i, j \in J^A : i \neq j \quad (52)$$

274 In order to avoid solving the same dual problem twice (once for detecting unboundedness and  
 275 once for obtaining a feasibility cut), we solve a bounded dual problem instead. This will imply  
 276 unboundedness of  $D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}})$  if the optimal value is negative (see Lemma 4.2). To do so, we  
 277 bound variables  $\alpha, \gamma_j, \rho_j, \forall j \in J^A$ , and  $\epsilon_{ij}, \forall i, j \in J^A : i \neq j$  by 1 from above. Let us refer to this  
 278 bounded dual problem as  $D_k^B(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}})$ . If the optimal value of  $D_k^B(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}})$  is negative valued,  
 279 we add the feasibility cut (53) to MP to cut the current solution  $(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}})$ .

$$\begin{aligned}
& -\bar{\alpha}w + \sum_{j \in J^A} \beta^k \bar{\delta}_j y_j + \sum_{i \in N^E} \sum_{j \in J^A: i \neq j} \beta^k \bar{\pi}_j x_{ij}^k + \sum_{j \in J^A} e_{j0} \bar{\gamma}_j x_{j0}^k - \sum_{j \in J^A} \beta^k \bar{\gamma}_j x_{0j}^k + \sum_{i \in N^E} \sum_{j \in J^A: i \neq j} e_{ij} \bar{\gamma}_j x_{ij}^k \\
& + \sum_{j \in J^A} \beta^k \bar{\rho}_j x_{0j}^k - \sum_{j \in J^A} e_{j0} \bar{\rho}_j x_{j0}^k - \sum_{i \in N^E} \sum_{j \in J^A: i \neq j} e_{ij} \bar{\rho}_j x_{ij}^k \\
& + \sum_{i \in J^A} \sum_{j \in J^A: i \neq j} \beta^k \bar{\phi}_{ij} x_{ij}^k - \sum_{i \in J^A} \sum_{j \in J^A: i \neq j} e_{ij} \bar{\epsilon}_{ij} x_{ij}^k \geq 0 \tag{53}
\end{aligned}$$

280 **Lemma 4.2.** *If the optimal value of  $D_k^B(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  is negative, then  $D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  is unbounded.*

281 *Proof.* Let  $\psi$  be an optimal solution to  $D_k^B(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  and let  $g(\psi) < 0$  be the value of this solution.  
282 For any positive constant  $v$ ,  $v\psi$  is a feasible solution for  $D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$ . Then, for an arbitrarily  
283 large  $v$ ,  $g(v\psi) = vg(\psi) < 0$  will be an arbitrarily small solution value for  $D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  which  
284 implies that  $D_k(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{l}}, \bar{\mathbf{w}})$  is unbounded. □

285

## 286 5. Implementation Details - General Framework

287 The general framework of our algorithm mainly consists of two phases. In Phase I, we solve  
288 the problem with at most one visit to each station. This is done by including only one copy of  
289 each station in BDA models MP and  $D_k(\cdot), k \in K$ . We refer to the BDA solving this restricted  
290 problem as  $BDA^1$ . In the second phase, we focus on the general problem that allows multiple  
291 visits to stations. Between the two phases, we perform an intermediate reduction procedure (See  
292 Section 6) to decrease the size of the problem in Phase II. The aim is to cut as much as possible  
293 without eliminating any potential solution that is better than the one in Phase I. We provide a  
294 brief summary of the general framework in Section 5.3. For clarity of presentation, we use the  
295 notation ‘BDA’ throughout the paper to refer to both the algorithm and the formulation.

296 Through our preliminary experiments, we observed that our algorithm has a better convergence  
297 behavior if we introduce a high quality initial feasible solution to our master problem. In order to  
298 achieve this, we first perform a ‘Step 0’ process where we solve our BDA formulation via a CPLEX  
299 option that allows stopping after finding the first integer feasible solution. We also introduce  
300 a partial *warm start* solution to CPLEX by opening all potential stations. In our experiments,  
301 CPLEX usually finds a solution with all stations opened. We then improve this solution by closing  
302 some of the stations. This removal process is a greedy approach based on checking the energy  
303 consumption between three consecutive stations and then closing the intermediate one if the battery  
304 level is sufficient to go from the first one to the third one. Finally, we introduce the set of open  
305 stations of this improved solution as a partial *warm start* solution for our Phase I problem and  
306 solve  $BDA^1$  with the valid inequalities given next in Section 5.1.

307 *5.1. Valid Inequalities for Phase I*

308 Let  $N_{min}^V$  be a lower bound on the number of vehicles needed for any feasible solution. We can  
 309 obtain such a lower bound by solving a bin packing problem (BPP) as follows. Define  $s_k = 1$  if  
 310 vehicle  $k$  is used, 0 otherwise and  $a_{ik} = 1$  if the request of customer  $i$  is provided by vehicle  $k$ ,  
 311 otherwise. Constraints (55) assign each customer to a vehicle while Constraints (56) ensure that  
 312 these assignments respect the capacities of vehicles.

$$(BPP) \quad N_{min}^V = \min \sum_{k \in K} s_k \quad (54)$$

$$\text{s.t.} \quad \sum_{k \in K} a_{ik} = 1, \quad \forall i \in I \quad (55)$$

$$\sum_{i \in I} d_i a_{ik} \leq Q^k s_k, \quad \forall k \in K \quad (56)$$

$$s_k \in \{0, 1\}, \quad \forall k \in K \quad (57)$$

$$a_{ik} \in \{0, 1\}, \quad \forall i \in N, k \in K. \quad (58)$$

313 We can detect the infeasibility due to insufficient freight capacity by solving BPP. Our preliminary  
 314 experiments revealed that introducing Constraint (59), which enforces using at least  $N_{min}^V$  vehicles,  
 315 usually reduces the solving time. This observation has led us to include this constraint in our  
 316 computations for every model of Phase I and Phase II.

$$\sum_{k \in K} \sum_{j \in J^A} x_{0j}^k \geq N_{min}^V \quad (59)$$

317 When we solve BDA to optimality with at most one visit to each station ( $BDA^1$ ), we include  
 318 the following sets of valid inequalities to our master problem:

$$\sum_{k \in K} \sum_{j: (i,j) \in A^k} x_{ij}^k \leq 1, \quad i \in J^A : d_i > 0 \quad (60)$$

$$\sum_{j: (i,j) \in A^k} x_{ij}^k - \sum_{j: (0,j) \in A^k} x_{0j}^k \leq 0, \quad i \in N^E, \forall k \in K \quad (61)$$

$$\sum_{i \in J^A} x_{i0}^k \leq 1, \quad \forall k \in K \quad (62)$$

$$\sum_{j: (j,i) \in A^k} x_{ij}^k \leq y_i, \quad i \in J^A : d_i = 0, \forall k \in K \quad (63)$$

$$y_i \leq \sum_{k \in K} \sum_{j \in N^E} x_{ij}, \quad \forall i \in J^A : d_i = 0 \quad (64)$$

$$y_j \leq \sum_{k \in K} \sum_{i \in N^E} x_{ij}, \quad \forall j \in J^A : d_j = 0 \quad (65)$$

$$w^k \leq \sum_{j \in J^A} \beta^k y_j \quad \forall k \in K. \quad (66)$$

319 Constraints (60) restrict the number of arcs entering a demand node to at most one. Constraints  
 320 (61) ensure that an arc is visited by a vehicle only if that vehicle leaves the depot. Constraints  
 321 (62) make sure that each vehicle enters the depot at most once. Constraints (63) forbid leaving  
 322 a zero-demand copy of a station if it is not open while Constraints (64) and (65) forbid opening  
 323 zero-demand station copies if they are not visited by any vehicle. Constraints (66) limit the total  
 324 recharging for each vehicle by full battery charging times the number of open stations.

325 Even though most of these constraints are implied by the original constraints, their inclusion  
 326 improves the time performance of our algorithm considerably.

327 Let  $(\bar{\mathbf{y}}^1, \bar{\mathbf{x}}^1, \bar{\mathbf{I}}^1, \bar{\mathbf{w}}^1)$  be the solution with value  $Z^1$  that we obtain from Phase I. After the  
 328 intermediate process which will be explained in Section 6, we proceed to Phase II to solve a  
 329 reduced problem via BDA with the valid inequalities of Section 5.2 below. We introduce  $\bar{\mathbf{y}}^1$  as a  
 330 partial *warm start* solution to the Phase II problem.

### 331 5.2. Valid Inequalities for Phase II

332 When we apply BDA for the last time with all possible copies of potential stations, in addition  
 333 to the valid inequalities (59),(61)-(66), we also introduce the following set of valid inequalities to  
 334 break the symmetry between the copies of stations:

$$\sum_{i:(i,j) \in A^k} x_{ij}^k \leq \sum_{i:((j-1),i) \in A^k} x_{(j-1)i}^k, \quad \forall k \in K, j \text{ is the } m^{\text{th}} \text{ copy of some } j_1 : d_{j_1} > 0, m \geq 3 \quad (67)$$

$$\sum_{i:(i,j) \in A^k} x_{ij}^k \leq \sum_{i:((j-1),i) \in A^k} x_{(j-1)i}^k, \quad \forall k \in K, j \text{ is the } m^{\text{th}} \text{ copy of some } j_1 : d_{j_1} = 0, m \geq 2. \quad (68)$$

335 Constraints (67) and (68) make sure that an additional copy of any station is visited by a  
 336 vehicle only if the preceding copy is visited by the same vehicle. Exceptionally, the second copy  
 337 (the first non-original copy), might be visited by a vehicle not serving the original copy if it is a  
 338 demand node.

### 339 5.3. General framework

340 Below we give a brief summary of the general framework of our algorithm:

341 Step 0: Solve  $BDA^1$  to obtain a feasible solution  $(\bar{\mathbf{y}}^0, \bar{\mathbf{x}}^0, \bar{\mathbf{I}}^0, \bar{\mathbf{w}}^0)$  (not necessarily optimal).

342 Close the redundant stations of  $(\bar{\mathbf{y}}^0, \bar{\mathbf{x}}^0, \bar{\mathbf{I}}^0, \bar{\mathbf{w}}^0)$  in a greedy manner and obtain  $(\bar{\mathbf{y}}, \bar{\mathbf{x}}, \bar{\mathbf{I}}, \bar{\mathbf{w}})$ .



343 Step 1: Phase I: Solve  $BDA^1 \cup (59)-(66)$  with partial *warm start*  $\bar{y}$  to obtain the optimal solution  
 344  $(\bar{y}^1, \bar{x}^1, \bar{l}^1, \bar{w}^1)$ .

345 Step 2: Apply the intermediate process (see Section 6) to reduce the size of  $BDA \cup (59)-(68)$ .

346 Step 3: Phase II: Solve the reduced  $BDA \cup (59)-(68)$  with partial *warm start*  $\bar{y}^1$  to obtain the  
 347 optimal solution.

## 348 6. Intermediate Reduction Process

349 Creating multiple copies of stations leads to a large-size formulation and excessive solving times.  
 350 We develop a two phase method that solves our Benders formulation initially for a single copy of  
 351 each station. Based on the value  $Z^1$  of the solution obtained at this stage, we apply an intermediate  
 352 processing procedure that checks the availability of a solution with multiple copies of stations that  
 353 has a smaller objective value than  $Z^1$ . This is an iterative procedure that proceeds by increasing  
 354 the number of copies considered, say  $m$ , one by one and applies lower bound checking steps.

355 The aim of this procedure is to check whether there exists a solution of BDA with exactly  $m$   
 356 copies for some station  $j$  whose cost is lower than  $Z^1$ .

357 **Lemma 6.1.** *Let  $Z_{(m,j,k)}^{LB}$  be a lower bound on the cost when exactly  $m$  copies of station  $j$  is visited  
 358 by vehicle  $k$ . If  $Z_{(m,j,k)}^{LB} \geq Z^1, \forall j, k$ , then, there exists no solution with  $m$  copies of any station  
 359 whose value is less than  $Z^1$ .*

360 *Proof.* Any feasible solution to a minimization problem provides an upper bound. Therefore,  
 361 the value of any feasible solution as described in Lemma 6.1 has to be greater than or equal to  
 362  $Z_{(m,j,k)}^{LB} \geq Z^1$ . □

363 **Lemma 6.2.** *If there exists some lower bound  $Z_{(m,j,k)}^{LB}$  such that  $Z_{(m',j,k)}^{LB} \geq Z_{(m,j,k)}^{LB}, \forall m' \geq m$  and  
 364 if Lemma 6.1 holds for such  $Z_{(m,j,k)}^{LB}$  of  $m$  for all  $j, k$ , then, there exist no solution with more than  
 365 or equal  $m$  copies of any station whose value is less than  $Z^1$ .*

366 *Proof.*  $Z_{(m',j,k)}^{LB} \geq Z_{(m,j,k)}^{LB} \geq Z^1, \forall j, k, m'$  such that  $m' \geq m$  by Lemma 6.1. Then, there exists no  
 367 solution with  $m'$  copies of any station whose value is less than  $Z^1$ . □

368 Below we give the details on how we obtain a lower bound that satisfies Lemma 6.2.

369 Let us consider a potential station  $j$ . If we use exactly  $m$  copies of this station, it means that  
 370 we visit at least  $m - 1$  different customers with some vehicle  $k$ . This leads to a partial network  
 371 structure as  $0 \dots j \dots i_1 \dots j \dots i_2 \dots \dots i_{m-1} \dots j \dots 0$ .

372 Let  $E^m$  and  $R^m$  be the amount of energy consumption and the amount of recharging needed,  
 373 respectively, when we visit station  $j$  exactly  $m$  times by some vehicle  $k_1$ . Now, we consider two  
 374 cases:

375 Case 1: all customers are visited by  $k_1$ .

376 Case 2: some customers are visited by other vehicle(s).

377 For any of Case 1 or Case 2, the following observation holds:

378 *Observation:*

379 (i)  $E^m > E_m^{base} = (m - 1)\beta^{k_1} + e_{j_0}$  and  $R^m > R_m^{base} = (m - 2)\beta^{k_1} + e_{j_0}$  if  $m$  is even.

380 (ii)  $E^m > E_m^{base} = (m - 1)\beta^{k_1}$  and  $R^m > R_m^{base} = (m - 2)\beta^{k_1}$  if  $m$  is odd.

381 In Figure 1, we illustrate this observation for  $m = 2$  and  $m = 3$ . In this figure, if  $E^2 \leq \beta^{k_1} + e_{j_0}$ ,  
 382 we would not need to visit  $j$  twice. Similarly, if  $E^3 \leq 2\beta^{k_1}$ , it would be redundant to visit  $j$  three  
 383 times.

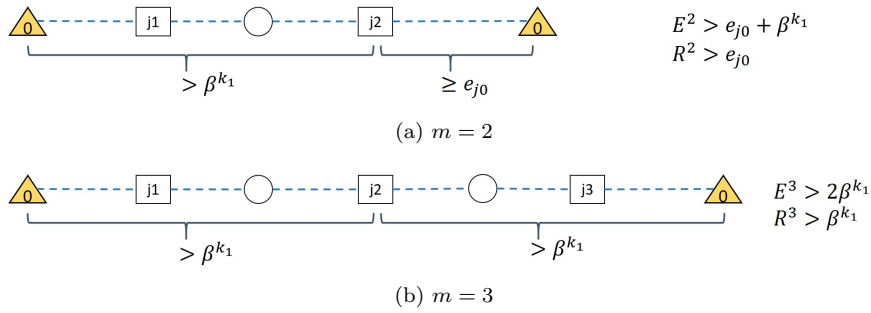


Figure 1: Illustration of minimal energy consumption and recharging need for visiting  $m$  copies of  $j$  with vehicle  $k$  for  $m = 2, 3$ .

384 We further check whether  $E^m$  and  $R^m$  values are much larger than  $E_m^{base}$  and  $R_m^{base}$ , respectively.

385 This is performed as follows:

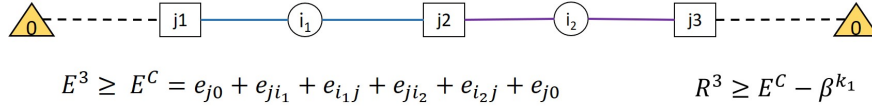


Figure 2: Calculation of minimal energy consumption  $E_m^C$  on the partial network for visiting  $m = 3$  copies of  $j$  with vehicle  $k_1$

386 In Case 1, we calculate the minimal possible energy consumption on such a partial network.  
 387 More explicitly, we define  $E_m^C = e_{0j} + e_{ji_1} + e_{i_1j} + e_{ji_2} + e_{i_2j} + \dots + e_{ji_{m-1}} + e_{j_0}$  where  $i_1, \dots, i_{m-1}$   
 388 are  $m - 1$  closest customers to  $j$  (e.g. see Figure 2). For this particular case, we can further obtain  
 389 a lower bound on the total energy consumption by constructing a 1-tree obtained via a minimum  
 390 spanning tree (MST) which spans the union set of all customers and  $m$  copies of  $j$  and that is  
 391 connected to the depot node with two minimal arcs. Let the energy consumption on this 1-tree  
 392 be  $E_m^T$  and  $E^m = \max\{E_m^C, E_m^T, E_m^{base}\}$ . We obtain a lower bound  $C$  on the total routing cost  
 393 similarly. Then,  $R = \max\{E^m - \beta^{k_1}, 0, R^m\}$  gives us the amount of recharging needed for this  
 394 partial network and  $Z^{LB} = R \times r_{k_1} + C + f_j + v_{k_1}$  gives us a lower bound on the cost of routing  
 395 all customers by vehicle  $k$  via visiting  $j$   $m$  times or more.

396 When we look at Case 2, we investigate all possible vehicle combinations that need to be  
397 considered by iteratively increasing the number of additional vehicles. If we find a combination  
398 with  $\bar{k}$  vehicles whose lower bound is less than  $Z^1$ , we do not check the combinations with more  
399 than  $\bar{k}$  vehicles. Let us assume that in addition to  $k_1$ , we use  $K^* = \{k_2, \dots, k_l\}$ . This means that  
400 we are visiting a different customer by each additional vehicle. Therefore, we add  $0 \dots i_{k_h} \dots 0$  as  
401 a connected component to our partial network for each vehicle  $k_h \in K^*$  where  $i_{k_h}$  is the closest  
402 customer to depot which is not served by preceding vehicles. Let  $E(k_h)$  and  $R(k_h)$  denote the  
403 total energy consumption and the amount of recharging needed, respectively, for the connected  
404 component for vehicle  $k_h \in K^*$ . In a similar fashion to that of Case 1, we calculate the total  
405 energy consumption  $E_m^C(K^*) = E^m + \sum_{k_h \in K^*} E(k_h)$ , the amount of recharging needed  $R_m^C(K^*) =$   
406  $R + \sum_{k_h \in K^*} R(k_h)$ , the total routing cost and hence a lower bound  $Z_{K^*}^{LB1}$  on the total cost with  
407 the corresponding vehicle combination.

408 In order to obtain another lower bound  $Z_{K^*}^{LB2}$  from the 1-tree constructed with the total energy  
409 consumption  $E_m^T(K^*)$ , this time, we use  $\beta = \sum_{k \in K^* \cup k_1} \beta^k$  as the total battery available in our  
410 calculation for the amount of recharging needed, that is,  $R^m(K^*) = \max\{\max\{E_m^C(K^*), E_m^T(K^*)\} -$   
411  $\beta, 0\}$  and  $r = \min_{k \in K^* \cup k_1} r_k$  as the unit recharging cost. Our bound  $Z_{K^*}^{LB}$  for the corresponding  
412 combination is defined as  $Z_{K^*}^{LB} = \max\{Z_{K^*}^{LB1}, Z_{K^*}^{LB2}\}$ . See Figures 3, 4, and 5 for sample 1-tree  
413 constructions for visiting two copies of  $j$  with 1, 2, and 3 vehicles, respectively. When  $\bar{k}$  vehicles  
414 are used, additional  $\bar{k} - 1$  copies of the depot are created and added to the set of nodes to find an  
415 MST. The 1-tree is then constructed by connecting this MST to the remaining (original) copy of  
416 the depot via two minimal arcs. Note that there do not exist any arcs between the copies of the  
417 same stations or the depot. The 1-trees constructed in this manner provide a lower bound for the  
418 shortest-length Hamiltonian cycles as in Figure 6, which also provide a lower bound on the lengths  
of corresponding VRP tours.

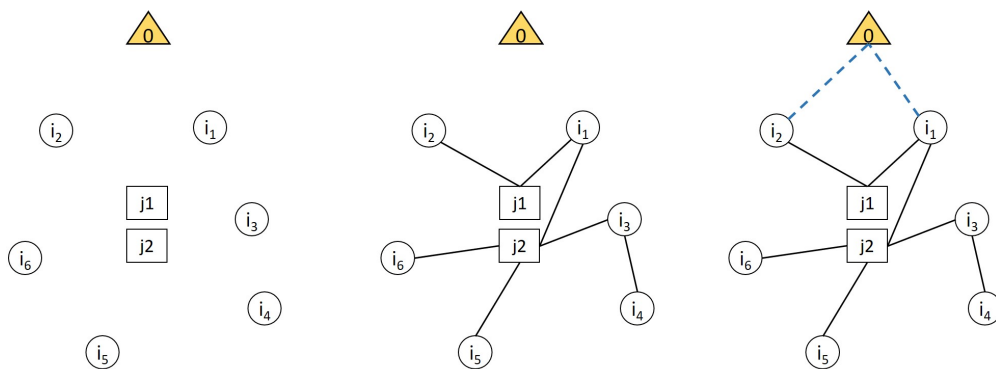


Figure 3: Construction of the 1-tree for obtaining LB2 when visiting  $m = 2$  copies of  $j$  with one vehicle.

419 If  $\min\{Z^{LB}, Z_{K^*}^{LB}\} \geq Z^{m-1}$  for every  $(k_1, K^*)$  combination, then, the value of any solution  
420 visiting  $j$  no less than  $m$  times will be no better than  $Z^{m-1}$ . So, in further iterations, we do not  
421 need more than  $m - 1$  copies of  $j$ . If this holds for all stations, we can terminate the iterative  
422

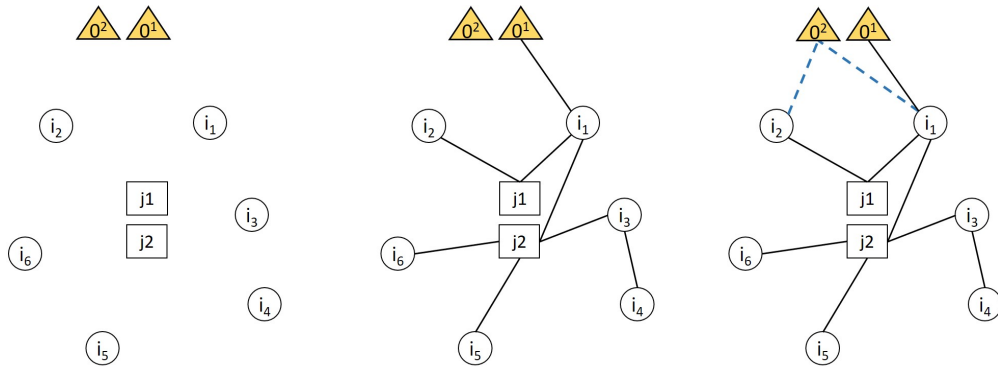


Figure 4: Construction of the 1-tree for obtaining LB2 when visiting  $m = 2$  copies of  $j$  with two vehicles.

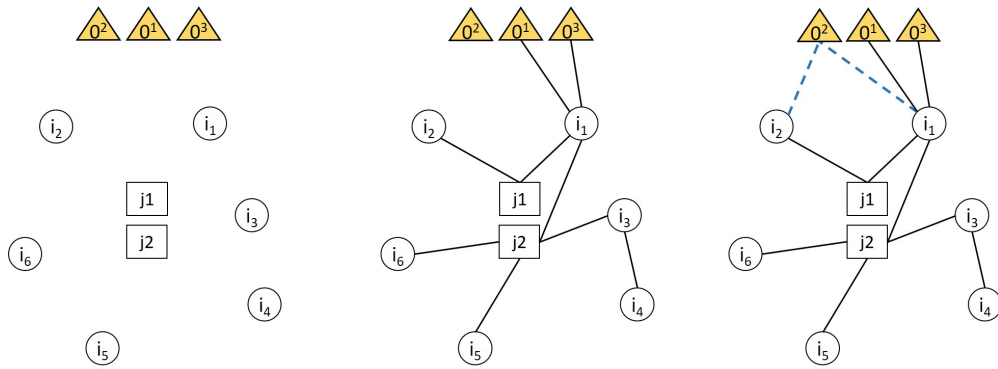


Figure 5: Construction of the 1-tree for obtaining LB2 when visiting  $m = 2$  copies of  $j$  with three vehicles.

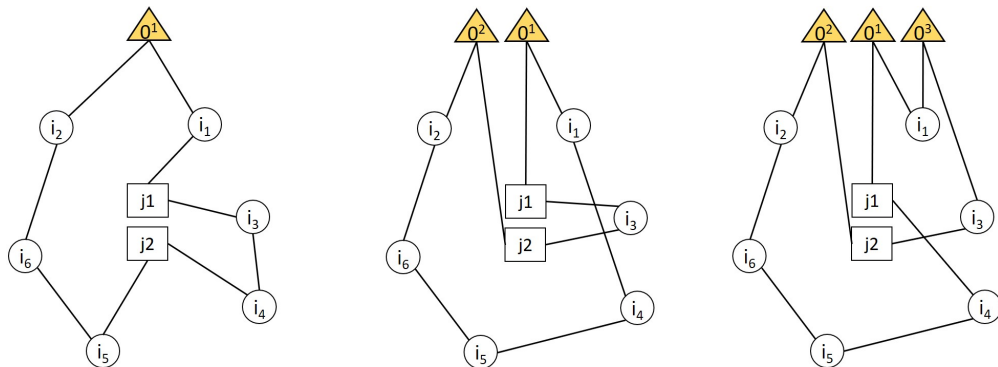


Figure 6: Illustrative Hamiltonian cycles for calculating the 1-tree lower bound LB2 on the cost of visiting  $m = 2$  copies of  $j$  with 1, 2, or 3 vehicles

423 checking procedure and solve our algorithm *BDA* with at most  $m - 1$  copies for each station.

424 *Additional speed-up mechanism:*

425 When solving *BDA* for this last time, we further apply variable fixing by using the information  
426 we obtained from this iterative procedure. More explicitly, if it is decided that we do not need  
427 more than  $l$  copies at a given station  $j$ , we fix all  $y$  values to zero for all those copies of  $j$ . Similarly,  
428 if we decided that visiting more than  $l$  copies of station  $j$  with vehicle  $k_1$  is not optimal, then we  
429 set all  $x$  variables of those copies to zero for vehicle  $k_1$ .

## 430 7. Computational Study

### 431 7.1. Experimental setting and data instances

432 In order to test our methods, we generated problem instances based on the data set provided by  
433 Schneider et al. (2014) for EVRP. This data set has 36 different instances with 5, 10, and 15 cus-  
434 tomers (12 instances for each customer size). The number of potential stations vary between 7 and  
435 22. From these instances, we retrieved the demand and network information (node coordinates).  
436 In the remainder of the paper, we will refer to these instances as ‘networks’ for clarity reasons.  
437 The vehicle freight capacities are equal to 200 in the original data. We introduced additional levels  
438 of capacities (80, 100), especially, to test relatively smaller instances. Similarly, for the battery  
439 capacities, we conducted tests for low, medium, and high capacities (10, 16, 22 kWh) to avoid  
440 extremely loose values on the tests of small problems (Sassi and Oulamara, 2017).

441 In our experiments, we use IBM ILOG CPLEX 12.8 in a Java environment. We run our tests  
442 on a server with Intel(R) Xeon(R) CPU E5-2640 v3 at 2.60 GHz processor and 16 cores. For each  
443 experiment, we set a memory limit of 16 GB and a time limit of 3600 seconds for instances with  
444  $|I| = 5$  and 10800 seconds for the others. *BDA* and *PF* run using a single thread.

445 We assume that the system will be equipped with fast charging facilities. Note that as there are  
446 no time windows or maximum travelling restrictions, introducing slow and fast charging facilities in  
447 each potential station would lead to optimal solutions with only cheaper type of charging facilities.  
448 As we do not have data on location-dependent fixed station costs for the instance networks, we  
449 utilize a single type of stations in our experiments. The lifetime of a charging facility is estimated  
450 to be 3 years and it is 5 years for the vehicles. When we calculate the fixed costs of opening  
451 stations and purchasing/leasing vehicles, we divide their costs by the number of days within their  
452 lifetime. We approximately obtain  $f_j = 8 \text{ €}$  as the fixed cost of opening stations and  $v_k = 16, 26,$   
453 and  $36 \text{ €}$  as the fixed cost of low, medium, and high capacity vehicles, respectively. Let  $l_{ij}$  be the  
454 distance between nodes  $i, j \in N$ ; then, we set  $c_{ij} = l_{ij} \times 0.03$  (cents/km),  $r_k = r = 0.07$  (cents/km)  
455 for  $k \in K$ ,  $e_{ij} = l_{ij} \times 135$  (Wh/km). In order to better tackle the precision issues of CPLEX, we  
456 multiplied all the cost values by 100.

457 We conduct experiments on instances with heterogeneous fleets of 2, 3, and 4 vehicles of three  
458 different types, see Table 1. In order to observe the value of using heterogeneous fleets compared to

Table 1: Freight capacity, battery capacity, and cost values for the three vehicle types considered.

| Vehicle type | 1  | 2   | 3   |
|--------------|----|-----|-----|
| $Q^k$        | 80 | 100 | 200 |
| $\beta^k$    | 10 | 16  | 22  |
| $v_k$        | 16 | 26  | 36  |

459 homogeneous fleets, we also conduct experiments with homogeneous fleets of 1, 2, 3, and 4 vehicles  
 460 for each vehicle type. For each network, we test the problem with heterogeneous fleets shown  
 461 in Table 2 as well as the homogeneous fleets generated. Certain network-fleet combinations are  
 infeasible and we exclude them from our computational analysis.

Table 2: Heterogeneous fleets tested for each network of Schneider et al. (2014).

| Fleet ID | Fleet size | Vehicle types available | Fleet ID   | Fleet size | Vehicle types available |
|----------|------------|-------------------------|------------|------------|-------------------------|
| K2V1-2   | 2          | 1,2                     | K4V1-1-1-2 | 4          | 1,1,1,2                 |
| K2V1-3   | 2          | 1,3                     | K4V1-1-1-3 | 4          | 1,1,1,3                 |
| K2V2-3   | 2          | 2,3                     | K4V1-1-2-2 | 4          | 1,1,2,2                 |
| K3V1-1-2 | 3          | 1,1,2                   | K4V1-2-2-2 | 4          | 1,2,2,2                 |
| K3V1-1-3 | 3          | 1,1,3                   | K4V1-1-3-3 | 4          | 1,1,3,3                 |
| K3V1-2-2 | 3          | 1,2,2                   | K4V1-1-2-3 | 4          | 1,1,2,3                 |
| K3V1-2-3 | 3          | 1,2,3                   | K4V1-2-2-3 | 4          | 1,2,2,3                 |
| K3V1-3-3 | 3          | 1,3,3                   | K4V1-2-3-3 | 4          | 1,2,3,3                 |
| K3V2-2-3 | 3          | 2,3,3                   |            |            |                         |

462

## 463 7.2. Analysis

464 We perform two types of analysis: (1) performance analysis of the model and the algorithm in  
 465 Section 7.2.1 and (2) managerial insights for selecting the fleet types in Section 7.2.2.

466 For simplicity, we provide average results for each network type in Table 3 but the detailed  
 467 results can be found in the supplementary document. For illustration, we also display the results  
 468 in Figures 7-11.

469 In these figures and tables,  $N^S$  and  $N^V$  show the number of stations opened and the number  
 470 of vehicles used, respectively. The value ‘ $g$ ’ represents the gap provided by CPLEX at the end  
 471 of the time limit (0.00 if the problem is solved to proven optimality) for the corresponding model  
 472 solved. Similarly, ‘ $t(s)$ ’ represents the total time spent in seconds for the corresponding model or  
 473 algorithm if it includes additional processes. The value of the best solution obtained from a model  
 474 is given under ‘Obj’. The selected vehicle types are indicated with their  $Q^k$  values. For example,  
 475 [80,100] indicates that the corresponding solution selects one vehicle of type 1 and one vehicle of  
 476 type 2.

### 477 7.2.1. Methodological observations and insights

478 Among 204 instances of  $|I| = 5$  ( $|N| \in \{8, 9\}$ ), our formulation PF can solve all but ten instances  
 479 to optimality within one hour. The average time spent by PF on these instances is 523.93 seconds,

Table 3: Average solution, gap, and solving time values for BDA and PF.

| Net. ID        | $ I $ | $ J $    | BDA Phase I |                |          | BDA Phase II |                |             | $N^S$       | $N^V$    | PF          |               |         |
|----------------|-------|----------|-------------|----------------|----------|--------------|----------------|-------------|-------------|----------|-------------|---------------|---------|
|                |       |          | Obj         | $g$            | $t(s)$   | Obj          | $g$            | $t(s)$      |             |          | Obj         | $g$           | $t(s)$  |
| c101C5         | 7     | 7127.48  | 0.00        | 1.32           | 7127.48  | 0.00         | 1.51           | 0.41        | 2.12        | 7127.48  | 0.00        | 446.07        |         |
| c103C5         | 7     | 4259.00  | 0.00        | 1.14           | 4259.00  | 0.00         | 1.42           | 0.00        | 1.35        | 4259.00  | 0.00        | 170.53        |         |
| c206C5         | 8     | 8553.95  | 0.00        | 2.55           | 8553.95  | 0.00         | 2.56           | 0.29        | 2.35        | 8553.96  | 0.00        | 819.52        |         |
| c208C5         | 7     | 5713.57  | 0.00        | 0.83           | 5713.57  | 0.00         | 1.03           | 0.18        | 1.35        | 5713.57  | 0.00        | 47.77         |         |
| r104C5         | 7     | 4214.04  | 0.00        | 1.09           | 4214.04  | 0.00         | 1.20           | 0.00        | 1.35        | 4214.04  | 0.00        | 182.98        |         |
| r105C5         | 5     | 4233.90  | 0.00        | 0.87           | 4233.90  | 0.00         | 1.01           | 0.00        | 1.35        | 4233.90  | 0.00        | 72.56         |         |
| r202C5         |       | 7        | 3948.66     | 0.00           | 0.92     | 3948.66      | 0.00           | 1.03        | 0.00        | 1.59     | 3948.66     | 0.00          | 27.56   |
| r203C5         |       | 8        | 6675.67     | 0.00           | 2.31     | 6675.67      | 0.00           | 2.28        | 0.06        | 2.12     | 6675.67     | 0.00          | 494.06  |
| rc105C5        |       | 8        | 7421.29     | 0.00           | 2.59     | 7421.29      | 0.00           | 2.80        | 0.06        | 2.12     | 7421.28     | 0.02          | 1077.36 |
| rc108C5        | 8     | 20738.84 | 0.00        | 1.97           | 20738.84 | 0.00         | 2.68           | 0.65        | 2.47        | 20738.84 | 0.06        | 815.56        |         |
| rc204C5        | 8     | 5219.75  | 0.00        | 2.61           | 5219.75  | 0.00         | 2.88           | 0.00        | 2.00        | 5219.82  | 0.05        | 1548.00       |         |
| rc208C5        | 7     | 5860.37  | 0.00        | 0.62           | 5860.37  | 0.00         | 0.77           | 0.18        | 1.35        | 5860.37  | 0.06        | 585.22        |         |
| <b>Average</b> |       |          | <b>0.00</b> | <b>1.57</b>    |          | <b>0.00</b>  | <b>1.76</b>    | <b>0.15</b> | <b>1.79</b> |          | <b>0.02</b> | <b>523.93</b> |         |
| c101e10        | 14    | 18721.65 | 0.00        | 346.81         | 17880.34 | 0.00         | 259.39         | 0.81        | 2.88        |          |             |               |         |
| c104e10        | 13    | 20193.80 | 0.00        | 259.55         | 20146.89 | 0.00         | 235.76         | 0.82        | 2.82        |          |             |               |         |
| c202e10        | 14    | 8208.00  | 0.00        | 164.15         | 8208.00  | 0.00         | 215.44         | 0.56        | 2.38        |          |             |               |         |
| c205e10        | 12    | 14160.13 | 0.00        | 182.23         | 14160.13 | 0.00         | 374.76         | 0.59        | 2.47        |          |             |               |         |
| r102e10        | 13    | 6936.08  | 0.00        | 22.18          | 6936.08  | 0.00         | 20.87          | 0.06        | 2.12        |          |             |               |         |
| r103e10        | 10    | 4247.15  | 0.00        | 7.56           | 4247.15  | 0.00         | 9.23           | 0.00        | 1.35        |          |             |               |         |
| r201e10        |       | 13       | 5895.34     | 0.00           | 237.09   | 5895.34      | 0.00           | 215.06      | 0.00        | 2.13     |             |               |         |
| r203e10        |       | 14       | 9780.68     | 0.00           | 151.44   | 9780.68      | 0.00           | 189.97      | 0.24        | 2.53     |             |               |         |
| rc102e10       |       | 13       | 27920.23    | 0.00           | 28.69    | 26254.23     | 0.00           | 32.92       | 1.31        | 3.00     |             |               |         |
| rc108e10       | 13    | 36706.26 | 0.00        | 320.01         | 36133.71 | 0.00         | 735.61         | 1.18        | 2.94        |          |             |               |         |
| rc201e10       | 13    | 14250.35 | 0.00        | 368.28         | 14250.35 | 0.00         | 352.18         | 0.47        | 2.59        |          |             |               |         |
| rc205e10       | 13    | 32217.30 | 0.00        | 175.72         | 31550.95 | 0.00         | 840.48         | 1.35        | 2.82        |          |             |               |         |
| <b>Average</b> |       |          | <b>0.00</b> | <b>188.53</b>  |          | <b>0.00</b>  | <b>286.73</b>  | <b>0.62</b> | <b>2.50</b> |          |             |               |         |
| c103e15        | 19    | 16455.88 | 0.07        | 5622.99        | 15546.37 | 0.06         | 4679.68        | 0.81        | 2.88        |          |             |               |         |
| c106e15        | 17    | 8316.83  | 0.01        | 1606.37        | 8316.83  | 0.01         | 1698.20        | 0.06        | 2.29        |          |             |               |         |
| c202e15        | 19    | 33255.84 | 0.09        | 4389.71        | 30922.17 | 0.06         | 4295.05        | 1.31        | 3.00        |          |             |               |         |
| c208e15        | 18    | 16909.28 | 0.08        | 4809.75        | 16396.69 | 0.06         | 4625.89        | 0.81        | 2.94        |          |             |               |         |
| r102e15        | 22    | 9356.76  | 0.03        | 3650.76        | 9356.76  | 0.04         | 4458.27        | 0.38        | 2.56        |          |             |               |         |
| r105e15        | 15    | 9618.99  | 0.07        | 5267.99        | 9618.99  | 0.07         | 5524.17        | 0.25        | 2.63        |          |             |               |         |
| r202e15        |       | 20       | 17991.78    | 0.11           | 4650.14  | 15944.78     | 0.09           | 5091.58     | 1.20        | 2.87     |             |               |         |
| r209e15        |       | 19       | 10064.97    | 0.02           | 1237.37  | 9981.06      | 0.00           | 1050.26     | 0.31        | 2.56     |             |               |         |
| rc103e15       |       | 19       | 30891.86    | 0.17           | 6556.05  | 30072.29     | 0.22           | 7016.98     | 1.38        | 3.00     |             |               |         |
| rc108e15       | 19    | 44373.32 | 0.16        | 4815.57        | 41028.85 | 0.28         | 5865.23        | 1.60        | 3.00        |          |             |               |         |
| rc202e15       | 19    | 33912.00 | 0.16        | 6017.79        | 34087.56 | 0.18         | 7061.24        | 1.44        | 3.25        |          |             |               |         |
| rc204e15       | 21    | 28632.75 | 0.22        | 8130.34        | 19652.83 | 0.17         | 9054.50        | 1.46        | 3.31        |          |             |               |         |
| <b>Average</b> |       |          | <b>0.10</b> | <b>4658.65</b> |          | <b>0.10</b>  | <b>4833.38</b> | <b>0.90</b> | <b>2.85</b> |          |             |               |         |

480 which is much larger compared to that of BDA. On the other hand, we observe that our algorithm  
 481 BDA can solve all the instances with  $|I| = 5$  to optimality requiring a few seconds only. In fact,  
 482 BDA is relatively faster than PF in every single instance.

483 For larger problems ( $|I| = 10, 15$ ), optimality could not be guaranteed with PF within the  
 484 time limit. In fact, PF could not even find a feasible solution for many instances. Based on these  
 485 observations, for larger problems, we present the results for BDA only.

486 For the networks with 10 customers and up to 14 potential stations ( $|N| \in \{13, 15\}$ ), BDA  
 487 solves all Phase I instances to optimality in 188.53 seconds on average. The algorithm reaches  
 488 either the time or memory limit before proven optimality in Phase II for 6 out of 200 instances  
 489 in this category. These are instances either with fleet type K4V1-1-1-2 or K4V1-1-2-2, which are  
 490 challenging also for larger instances with 15 customers, as observed in Figure 7. Figure 7 compares  
 491 the average solving times (Phase I, Phase II, and Phase I+Phase II) and gaps across fleet types.  
 492 In this figure, Phase I gaps and times are better indicators for challenging instances as Phase II  
 493 gaps and solving times are not available due to memory limit for some instances. BDA is able to  
 494 solve 65% of the instances with  $|I| = 15$  ( $|N| \in \{18, 19, 20, 21, 22, 23\}$ ) to proven optimality within  
 the time limits. The average gap is 0.10.

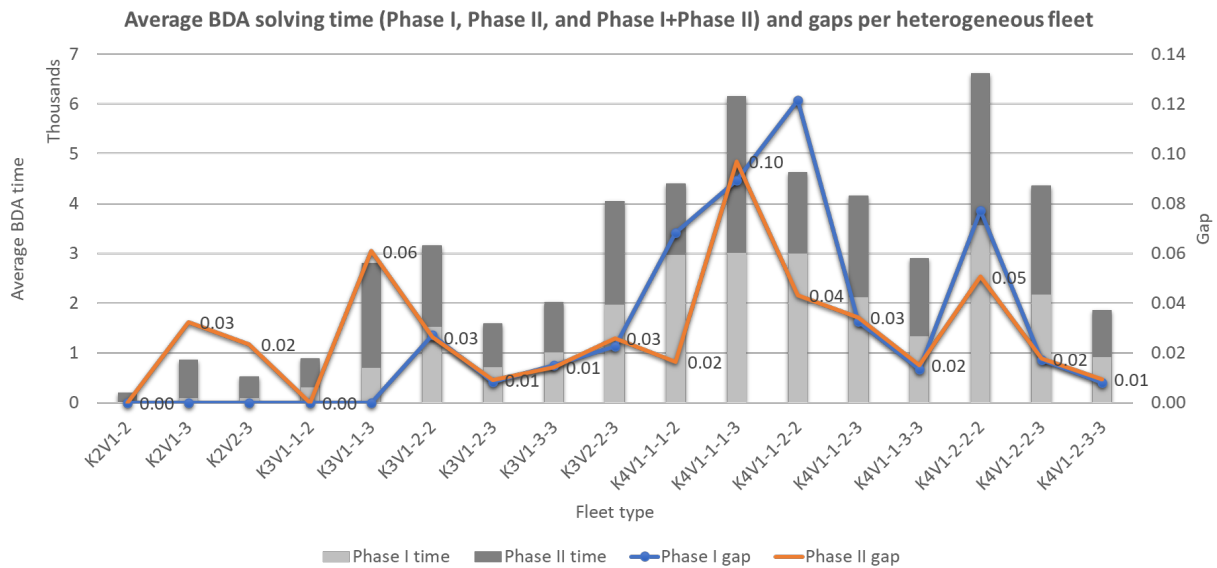


Figure 7: Average BDA solving time (Phase I, Phase II, and Phase I+Phase II) and gaps per heterogeneous fleet.

495 A common pattern we observe with the instances reaching the memory limit is that (1) their  
 496 fleets consist of four vehicles with either one type 3 vehicle and three type 1 vehicles or only type  
 497 1 and type 2 vehicles and (2) Phase I solution uses all four vehicles. The intermediate processing  
 498 procedure cannot reduce the Phase II problem sufficiently due to high level of degeneracy and  
 499 low-cost and low-capacity vehicles in the fleet.

501 Overall, the algorithm is able to provide very high quality solutions within three hours. It



502 solves 88% of all instances to optimality. The average gap among all instances is 0.03 only.

503 For several instances, Phase I and Phase II costs are not identical. We interpret this as follows:

504 • If Phase II problem does not reach proven optimality within the time limit and Phase I  
505 cost is less than Phase II cost, this indicates the benefit of solving a restricted version when  
506 the original problem is too difficult to solve within the available time and computational  
507 resources.

508 • If neither Phase I nor Phase II problems reach proven optimality within the time limit and  
509 Phase I cost is less than Phase II cost, either a solution using multiple copies of a station is  
510 found in Phase II, which is not feasible for Phase I problem, or Phase I solution helps Phase  
511 II problem in finding a better-quality solution faster.

512 Below are some further observations and future research directions for developing algorithms  
513 with improved performance.

514 • The algorithm needs more time to reach proven optimality as the size of the fleet increases.  
515 This is often because the dual bound is too weak and the majority of the time is spent  
516 for closing the gap. The dual bounds can be strengthened by using good valid inequalities.  
517 However, valid inequalities might also make the formulation heavier and more difficult to find  
518 feasible solutions. Therefore, it is in general more efficient to decompose the problem into  
519 smaller problems with smaller fleet configurations and solve them iteratively by updating the  
520 fleet configurations at each step. Obviously, there will be a trade-off between the number  
521 of small fleet configurations and the size of each configuration as in most decomposition  
522 methods.

523 • The focus in this paper was on heterogeneous-fleet problems with a limited number of vehicles.  
524 For solving instances with homogeneous fleets, the efficiency of the algorithm can be improved  
525 by updating the intermediate process. A similar improvement-procedure update would also  
526 be helpful in solving the instances with an unlimited number of vehicles of each type.

### 527 *7.2.2. Managerial insights*

528 Figure 8 compares the average cost, number of stations opened and the number of vehicles  
529 used for each given heterogeneous fleet. As expected, the average cost in general decreases as the  
530 fleet size increases. In this Figure, most significant drops in cost occur when the fleet has a type-3  
531 vehicle and another vehicle of type 2 or type 3. These are also the instances where the optimal or  
532 best known solutions open fewer number of stations. The highest number of stations are opened  
533 with fleets K2V1-2, K3V1-1-2, and K4V1-1-1-2 which have relatively smaller total freight capacity  
534 and total range. Thus, solutions to these instances also use more vehicles on average.

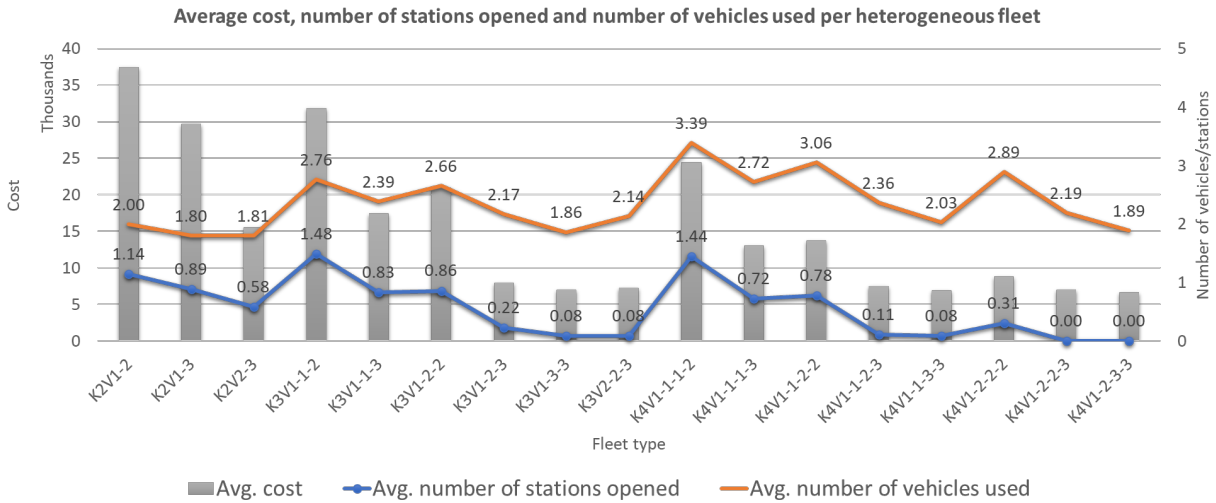


Figure 8: Average cost, number of stations opened and number of vehicles used for each heterogeneous fleet type.

535 It is, indeed, interesting to note that small vehicles result in higher costs, an observation which  
 536 is not that obvious. This is because they require potentially more charging and more stations to  
 537 be opened which incur very high costs.

538 Figure 9 shows the results of an analysis from another perspective where we calculate the  
 539 averages over all fleet types for each network. In this figure, we can clearly observe that the  
 540 number of stations needed changes a lot depending on the network type. This is then reflected  
 541 in the cost. We also observe that the average cost for a smaller-network instance, for example,  
 542 rc108c5, can be much higher than the cost for a larger-network instance, for example, c106c15.

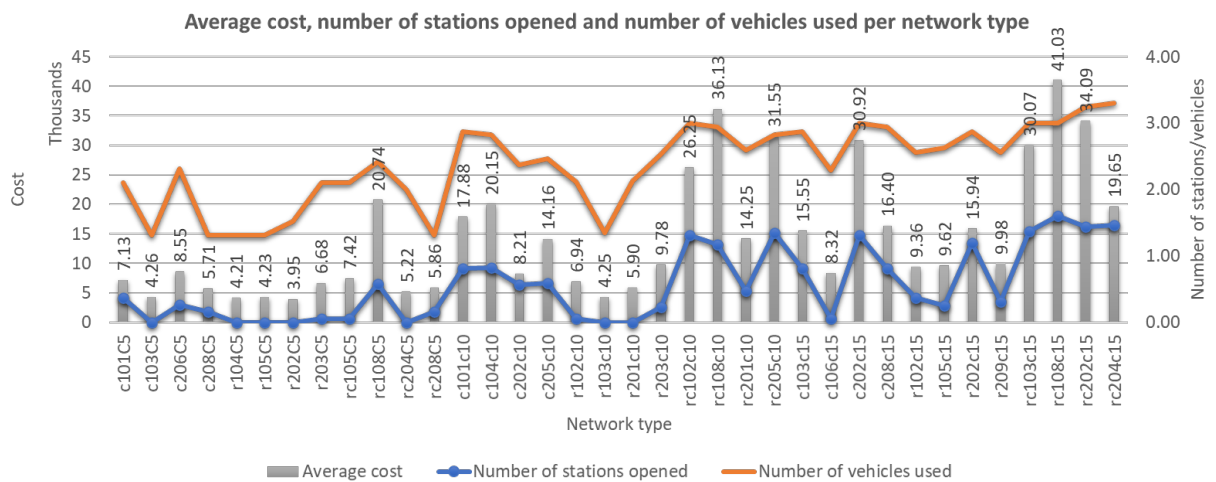


Figure 9: Average cost, number of stations opened and number of vehicles used for each network type (heterogeneous fleets).

543 Moreover, we compare the average cost, number of opened stations and vehicles used with

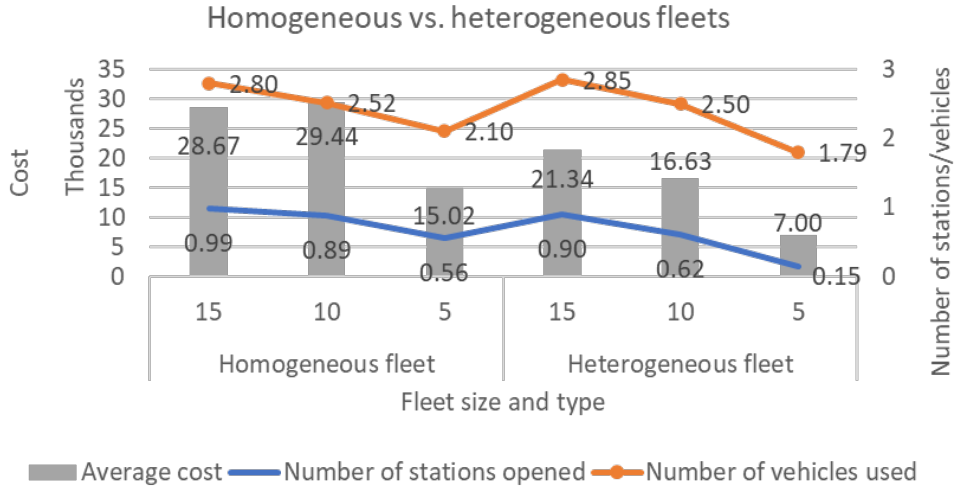


Figure 10: A comparison of homogeneous and heterogeneous fleet: average cost, number of opened stations and vehicles used for each network size.

544 homogeneous and heterogeneous fleets of at least two vehicles in Figure 10. We observe that the  
 545 average cost is much higher when using homogeneous fleets compared to heterogeneous ones, it  
 546 is indeed twice as much for instances with  $|I| = 5$ . The average number of stations opened with  
 547 homogeneous fleets is also larger for each network group. And in general, a similar conclusion can  
 548 be made for the average number of vehicles used.

549 In Figure 11, we also show the average cost per homogeneous fleet, including the fleets with a  
 550 single vehicle. Similar to previous observations, the average cost is lower when the fleet contains  
 551 larger vehicles.

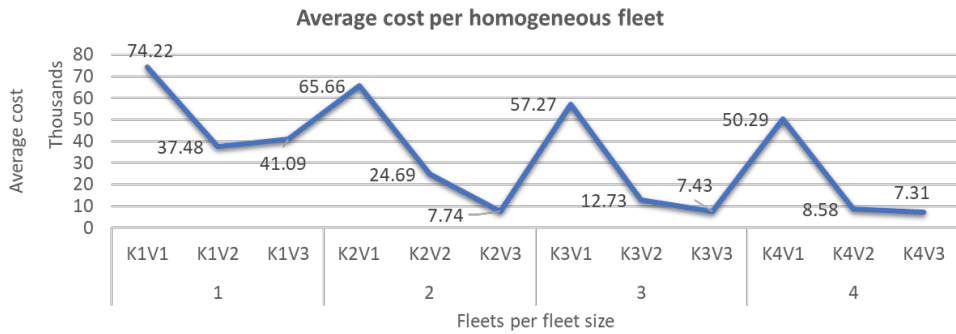


Figure 11: Average cost for each homogeneous fleet.

552 Below we provide some further key observations:

- 553 • For the majority of the instances where  $|I| = 5$  and all types of vehicles are present in the  
 554 heterogeneous fleet, medium-size vehicles (type 2) are not selected in the optimal solutions.

555 This is not the case with larger networks.

- 556 • When the fleets are homogeneous, no instance uses four vehicles of type 3 and only four  
557 instances, two from networks rc202c15 and rc204c15 each, use three type 3 vehicles.
- 558 • When solving the instances with fleets of at least two vehicles, we observe that the optimal  
559 solutions serving all the demand via a single vehicle only uses the largest vehicle type (type  
560 3). Although there exist several instances where it is feasible to serve all demand with a  
561 single vehicle of type 1 or type 2, such solutions are suboptimal and solutions with lower cost  
562 can be obtained using multiple vehicles.

## 563 8. Conclusion and Future Research Directions

564 In this paper, we introduce an electric location-routing problem with heterogeneous fleet and  
565 partial recharging. We initially propose a new mixed integer programming formulation for this  
566 problem. This is a formulation with three-index binary routing variables where the sub-tour elimi-  
567 nation is enhanced via a group of load (flow) preservation constraints. We further utilize additional  
568 non-negative continuous variables to satisfy battery restrictions and energy-related constraints.

569 We test our formulation on small problem instances from the literature. Although the formu-  
570 lation is able to solve instances with 5 customers and up to 8 potential stations to optimality, we  
571 observe that its performance is limited when it comes to solving larger problems.

572 As we aim to solve this problem to optimality, we further develop a two-phase algorithm based  
573 on the Benders decomposition of our formulation. The first phase solves a restricted version of  
574 the problem that allows at most one visit to each station. By using the information obtained, the  
575 second phase problem, which is the generalized problem allowing multiple visits to any station,  
576 is reduced in size, making it relatively easier compared to the case with no a priori processing.  
577 This enhancement step allows us to solve 88% of all the instances with up to 15 customers and 22  
578 potential stations to optimality. The average optimality gap over all other instances is negligible,  
579 just 0.03. In summary, our approach obtains very high quality solutions within the time limit.

580 We observe through our experimental study that the problem is usually harder to solve when  
581 the vehicle capacities are smaller. We also found that using small vehicles results in higher costs.

582 Though the main focus of this study is to present an exact method with proven optimality,  
583 this approach can be easily combined with additional procedures leading to powerful matheuristics  
584 to obtain near optimal solutions for larger instances, see Salhi (2017). This problem can also  
585 be tackled by powerful metaheuristics whose performance can be evaluated using lower bounds  
586 obtained from the proposed method.

587 The current problem can be extended to cater for several deterministic and stochastic variants  
588 that are worth exploring. These include the consideration of time windows, multiple depots and/or  
589 additional location decisions for the selection of depots, as well as periodicity or uncertainty in the

590 customer demand. Moreover, the model and the algorithm we propose in this paper can be easily  
591 modified to solve the problem variants where vehicle-dependent energy consumption and routing  
592 costs are considered.

593 **Acknowledgment:** This work was supported by the French National Research Agency [Grant  
594 number ANR-15-CE22-0017]. [The first author acknowledges the partial support by Internal Funds](#)  
595 [KU Leuven](#). We thank the authors of Schneider et al. (2014) and Schiffer and Walther (2017b) for  
596 providing the data instances. We are grateful to the three anonymous referees for their comments  
597 that improved the content as well as the presentation of the paper.

## 598 References

- 599 Akca, Z., Berger, R., Ralphs, T., 2009. A branch-and-price algorithm for combined location and routing problems  
600 under capacity restrictions, in: *Operations research and cyber-infrastructure*. Springer, pp. 309–330.
- 601 Arslan, O., Karaşan, O.E., 2016. A benders decomposition approach for the charging station location problem with  
602 plug-in hybrid electric vehicles. *Transportation Research Part B: Methodological* 93, 670–695.
- 603 Baldacci, R., Battarra, M., Vigo, D., 2008. Routing a heterogeneous fleet of vehicles, in: *The vehicle routing problem:*  
604 *latest advances and new challenges*. Springer, pp. 3–27.
- 605 Belenguer, J.M., Benavent, E., Prins, C. and Prodhon, C., Wolfler-Calvo, R., 2011. A branch-and-cut method for the  
606 capacitated location-routing problem. *Computers & Operations Research* 38, 931–941.
- 607 Benders, J.F., 1962. Partitioning procedures for solving mixed-variables programming problems. *Numerische Math-*  
608 *ematik* 4, 238–252.
- 609 Birge, J.R., Louveaux, F., 2011. *Introduction to stochastic programming*. Springer Science & Business Media.
- 610 Botton, Q., Fortz, B., Gouveia, L., Poss, M., 2013. Benders decomposition for the hop-constrained survivable network  
611 design problem. *INFORMS journal on computing* 25, 13–26.
- 612 Çalik, H., Fortz, B., 2019. A Benders decomposition method for locating stations in a one-way electric car sharing  
613 system under demand uncertainty. *Transportation Research Part B: Methodological* 125, 121–150.
- 614 Calik, H., Leitner, M., Luipersbeck, M., 2017. A Benders decomposition based framework for solving cable trench  
615 problems. *Computers & Operations Research* 81, 128–140.
- 616 de Camargo, R.S., de Miranda, G., Løkketangen, A., 2013. A new formulation and an exact approach for the  
617 many-to-many hub location-routing problem. *Applied Mathematical Modelling* 37, 7465–7480.
- 618 Contardo, C., Cordeau, J.F., Gendron, B., 2013. A branch-and-cut-and-price algorithm for the capacitated location-  
619 routing problem. *INFORMS Journal on Computing* 26, 88–102.
- 620 Contardo, C., Cordeau, J.F., Gendron, B., 2014. A grasp+ilp-based metaheuristic for the capacitated location-routing  
621 problem. *Journal of Heuristics* 20(1), 1–38.
- 622 Costa, A.M., 2005. A survey on Benders decomposition applied to fixed-charge network design problems. *Computers*  
623 *& operations research* 32, 1429–1450.
- 624 Davis, B.A., Figliozzi, M.A., 2013. A methodology to evaluate the competitiveness of electric delivery trucks.  
625 *Transportation Research Part E: Logistics and Transportation Review* 49, 8–23.
- 626 Escobar, J.W., Linfati, R., Toth, P., 2013. A two-phase hybrid heuristic algorithm for the capacitated location-routing  
627 problem. *Computers & Operations Research* 40(1), 70–79.
- 628 European Environment Agency, 2018. Final energy consumption by mode of transport. URL: [http://www.](http://www.eea.europa.eu/data-and-maps/indicators/transport-final-energy-consumption-by-mode/assessment-9)  
629 [eea.europa.eu/data-and-maps/indicators/transport-final-energy-consumption-by-mode/assessment-9](http://www.eea.europa.eu/data-and-maps/indicators/transport-final-energy-consumption-by-mode/assessment-9).  
630 Accessed: 18/12/2018.

- 631 Felipe, Á., Ortuño, M.T., Righini, G., Tirado, G., 2014. A heuristic approach for the green vehicle routing problem  
632 with multiple technologies and partial recharges. *Transportation Research Part E: Logistics and Transportation*  
633 *Review* 71, 111–128.
- 634 Fortz, B., Poss, M., 2009. An improved Benders decomposition applied to a multi-layer network design problem.  
635 *Operations research letters* 37, 359–364.
- 636 He, S.Y., Kuo, Y.H., Wu, D., 2016. Incorporating institutional and spatial factors in the selection of the optimal  
637 locations of public electric vehicle charging facilities: A case study of Beijing, China. *Transportation Research Part*  
638 *C: Emerging Technologies* 67, 131 – 148.
- 639 Hemmelmayr, V.C., Cordeau, J.F., Crainic, T.G., 2012. An adaptive large neighborhood search heuristic for two-  
640 echelon vehicle routing problems arising in city logistics. *Computers & Operations Research* 39(12), 3215–3228.
- 641 Hof, J., Schneider, M., Goeke, D., 2017. Solving the battery swap station location-routing problem with capacitated  
642 electric vehicles using an AVNS algorithm for vehicle-routing problems with intermediate stops. *Transportation*  
643 *Research Part B: Methodological* 97, 102–112.
- 644 Keskin, M., Çatay, B., 2016. Partial recharge strategies for the electric vehicle routing problem with time windows.  
645 *Transportation Research Part C: Emerging Technologies* 65, 111–127.
- 646 Lee, C., Han, J., 2017. Benders-and-price approach for electric vehicle charging station location problem under  
647 probabilistic travel range. *Transportation Research Part B: Methodological* 106, 130–152.
- 648 Liu, H., Wang, D.Z., 2017. Locating multiple types of charging facilities for battery electric vehicles. *Transportation*  
649 *Research Part B: Methodological* 103, 30 – 55.
- 650 Lopes, R.B., Ferreira, C., Santos, B.S., 2016. A simple and effective evolutionary algorithm for the capacitated  
651 location–routing problem. *Computers & Operations Research* 70, 155–162.
- 652 Nagy, G., Salhi, S., 2007. Location-routing: Issues, models and methods. *European Journal of Operational Research*  
653 177, 649–672.
- 654 Pelletier, S., Jabali, O., Laporte, G., 2016. 50th anniversary invited article—goods distribution with electric vehicles:  
655 review and research perspectives. *Transportation Science* 50, 3–22.
- 656 Prins, C., Prodhon, C., Ruiz, A., Soriano, P., Wolfler-Calvo, R., 2007. Solving the capacitated location-routing  
657 problem by a cooperative Lagrangean relaxation-granular tabu search heuristic. *Transportation Science* 41(4),  
658 470–483.
- 659 Prodhon, C., Prins, C., 2014. A survey of recent research on location-routing problems. *European Journal of*  
660 *Operational Research* 238, 1–17.
- 661 Salhi, S., 2017. *Heuristic search: The emerging science of problem solving*. Springer.
- 662 Salhi, S., Nagy, G., 1999. Consistency and robustness in location-routing. *Studies in Locational Analysis* 13, 3–19.
- 663 Salhi, S., Rand, G.K., 1989. The effect of ignoring routes when locating depots. *European Journal of Operational*  
664 *Research* 39, 150–156.
- 665 Salhi, S., Rand, G.K., 1993. Incorporating vehicle routing into the vehicle fleet composition problem. *European*  
666 *Journal of Operational Research* 66, 313–330.
- 667 Salhi, S., Sari, M., Saidi, D., Touati, N., 1992. Adaptation of some vehicle fleet mix heuristics. *Omega* 20, 653–660.
- 668 Sassi, O., Oulamara, A., 2017. Electric vehicle scheduling and optimal charging problem: complexity, exact and  
669 heuristic approaches. *International Journal of Production Research* 55, 519–535.
- 670 Schiffer, M., Schneider, M., Laporte, G., 2018. Designing sustainable mid-haul logistics networks with intra-route  
671 multi-resource facilities. *European Journal of Operational Research* 265, 517–532.
- 672 Schiffer, M., Walther, G., 2017a. An adaptive large neighborhood search for the location-routing problem with  
673 intra-route facilities. *Transportation Science* 52, 331–352.
- 674 Schiffer, M., Walther, G., 2017b. The electric location routing problem with time windows and partial recharging.  
675 *European Journal of Operational Research* 260, 995–1013.
- 676 Schneider, M., Drexl, M., 2017. A survey of the standard location-routing problem. *Annals of Operations Research*

677 259, 389–414.

678 Schneider, M., Löffler, M., 2017. Large composite neighborhoods for the capacitated location-routing problem.  
679 *Transportation Science* 53, 301–318.

680 Schneider, M., Stenger, A., Goeke, D., 2014. The electric vehicle-routing problem with time windows and recharging  
681 stations. *Transportation Science* 48, 500–520.

682 Ting, C.J., Chen, C.H., 2013. A multiple ant colony optimization algorithm for the capacitated location routing  
683 problem. *International Journal of Production Economics* 141(1), 34–44.

684 Worley, O., Klabjan, D., Sweda, T.M., 2012. Simultaneous vehicle routing and charging station siting for commercial  
685 electric vehicles, in: *Electric Vehicle Conference (IEVC), 2012 IEEE International, IEEE*. pp. 1–3.

686 Yaman, H., 2006. Formulations and valid inequalities for the heterogeneous vehicle routing problem. *Mathematical*  
687 *Programming* 106, 365–390.

688 Yang, J., Sun, H., 2015. Battery swap station location-routing problem with capacitated electric vehicles. *Computers*  
689 *& Operations Research* 55, 217–232.

690 Yıldız, B., Arslan, O., Kardeş, O.E., 2016. A branch and price approach for routing and refueling station location  
691 model. *European Journal of Operational Research* 248, 815–826.

692 Zhang, S., Chen, M., Zhang, W., 2019. A novel location-routing problem in electric vehicle transportation with  
693 stochastic demands. *Journal of Cleaner Production* 221, 567–581.