

# Ergonomics of Cyberspace. Mathematical Modeling to Create Groups of Operators for Error-Free and Timely Implementation of Functions in a Distributed Control System

Evgeniy Lavrov<sup>1</sup>[0000-0001-9117-5727], Nadiia Pasko<sup>2</sup>[0000-0002-9943-3775], Olga Siryk<sup>3</sup>[0000-0001-9360-4388], Oleksandr Burov<sup>4</sup>[0000-0003-0733-1120], Viacheslav Osadchyi<sup>5</sup>[0000-0001-5659-4774]

<sup>1</sup>Sumy State University, Sumy, Ukraine

<sup>2</sup>Sumy National Agrarian University, Sumy, Ukraine

<sup>3</sup>Taras Shevchenko National University of Kyiv, Kyiv, Ukraine

<sup>4</sup>Institute of Information Technologies and Learning Tools, Kyiv, Ukraine

<sup>5</sup>Bogdan Khmelnytsky Melitopol State Pedagogical University, Melitopol, Ukraine

prof\_lavrov@hotmail.com

**Abstract.** The problem of designing group activities of operators in distributed information environments is considered. An optimization model is proposed for choosing the option of assigning functions to a group of operators for the basic model of the algorithm for executing an application in the form of an event graph. The model can be used in decision support systems by the operator-manager of critical control systems.

**Keywords:** Ergonomics, Cyberspace, Human-Operator, Human-Machine, Reliability, Modeling, Cybersecurity, Control System, Critical System.

## 1 Introduction

Fundamental changes in computer control tools and methods [1] for complex distributed objects, such as energy systems, oil and gas transportation systems, transport and research systems [2-5], training systems [6-9] have fundamentally changed the work of people in distributed information environments. The technology of interaction between operators and control objects through complex information models has changed and become more complicated [1, 10]. The share of group activities has increased when operators jointly implement the specified control technologies, despite the fact that they may be located at a great distance from each other [1, 10]. With the increase in the technical and organizational complexity of such ergatic control systems, the cost of operator's errors, failures and malfunctions of information technology equipment also increases [1, 2, 10, 11]. With the introduction of computer-aided decision support methods and artificial intelligence, the role of a person does not decrease, but also increases significantly [1, 3, 10], especially in the context of combating cyber-criminals and various cyber-attacks on information systems [12].

## **2 Problem Statement**

The main goal of the ergonomic support of complex control systems is to minimize the risks caused by the erroneous actions of people-operators [3, 10, 13-16], by taking into account engineering-psychological and ergonomic restrictions, the individual characteristics of operators and by “adapting” technology to a person [16-18].

In recent years, emphasis from studying and solving problems of the so-called “physical” ergonomics (anthropometric, physiological, etc. problems) shifted to solving problems of providing cognitive comfort for operators and tasks of “organizational” ergonomics [2, 3, 11, 16-18]. This implies the task of determining the number of personnel, the qualifications of people, the distribution of functions between operators and the design of methods for interaction between operators. This task of the prompt organization of operator interaction is especially acute in cases related to non-standard or emergency situations, as well as in the tasks of managing security incidents. The operator-manager, who takes over the organization of the elimination of the problem situation, must quickly distribute the functions between individual operators. In this case, the requirements [18-20] should be taken into account:

- Maximizing the probability of error-free execution of the application (elimination of the problem situation);
- Restrictions on the timing of activities;
- Opportunities for organizing joint activities (forming a team or group of operators compatible with each other): technologically (means of labor, communication channels, information models, etc.) [18-20]; psychologically [25-27]; other.


Various network methods can be used to simulate the activities of operators, e.g.[13, 21]; but the most convenient tool is a functional network (FN) [18-20], which allows not only description of the activity but also evaluation of its reliability characteristics. To assess the reliability of the activity, mathematical models and a software-modeling complex were developed [22-24], and a number of optimization tasks were solved, including distribution of functions between operators. However, the issues of organizing group activities are not fully resolved in the ergonomics of automated control systems [24-27]. In this regard, the objective of this work is to determine the problem of forming a group of compatible operators working in a single information space, who are assigned to perform discrete algorithmic activities to execute applications arriving at random times (with the distribution of individual operations between specific operators) in order to maximize the probability of error-free execution under constraint on mathematical expectation of runtime.

## **3 Results**

### **3.1 The principle of formalizing the problem situation of group activity optimization**

The principle of formalizing the problem situation of group activity optimization:

- Describe in natural language the sequence of work to complete the application.
- Following the identified logic, develop a FN model that describes the activities for the implementation of the application (work schedule).
- Make the transition from the work graph to the event graph (as events we use events consisting in the fact that some operation was performed correctly or performed with some violation (Fig. 1 demonstrates an example of the transition from the work graph to the event graph).
- Considering the possibility of alternative assignments of operators to separate operations (with different probabilities of transition from state to state and different runtime characteristics), build on the basis of an event graph a model of semi-Markov decision-making process (SMDMP) for assigning operators to perform individual operations (taking into account their compatibility in a group).
- Formalize the optimization problem for SMDMP.

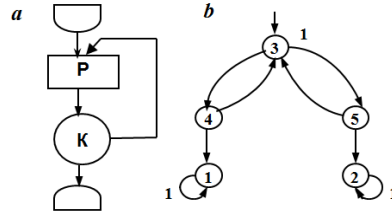

**Fig.1.** An example of the process model for implementing the simplest application: *a* - work graph; *P* - work operation; *K* - operation control; *b* - graph of events [18,25].

### 3.2 Model for designing group activities

Let us select the absorbing vertices among the SMDMP vertices. Let the vertices  $1, 2, \dots, r_i$  are the vertices with acceptable outcomes. For non-absorbing vertices, we define the probabilities of finding the process in these initial states:  $a = (a_{r+1}, a_{r+2}, \dots, a_n)$ , so that

$$\sum_{i=r+1}^N a_i = 1, \quad (1)$$

where  $N$  is the number of states,  $r$  is the number of absorbing states.

We assume that  $K$  is the set of all operators.  $K_0$  is the cardinality of  $K$ . At each vertex  $i$  there can be  $K_i$  of alternative assignments. Each variant is associated with a set of transitions from vertex  $i$  to vertex  $j$  when choosing the  $k$ -th solution,  $k \in K_i$ , with corresponding probabilities and transition times. Thus, the  $k$ -th solution corresponds to the assignment of the operator  $k \in K_i, k \in K$  to the stage of the technological process, which corresponds to state  $i$  of the SMDMP.  $P_{ij}^{(k)}$  is the probability of the transition of the process from state  $i$  to state  $j$  when choosing the  $k$ -th alternative. Where in:

$$\sum_j P_{ij}^{(k)} = 1 \text{ at all } i \text{ and all } k \in K_i \quad (2)$$

$T_{ij}^{(k)}$  is the average time of transition from state  $i$  to state  $j$  when choosing the  $k$ -th alternative. Then the average time of the  $i$ -th work with the  $k$ -th solution,  $T_i^{(k)}$ , is defined as:

$$T_i^{(k)} = \sum_j P_{ij}^{(k)} * T_{ij}^{(k)} \quad (3)$$

It is necessary to maximize  $P_r$ - the probability of absorption in the  $r$ -state (or in states of the  $r$ -type):

$$P_r = \sum_l \sum_{i=r+1}^N \sum_{k \in K_i} P_{i r_i}^{(k)} * x_i^{(k)} \quad (4)$$

Here  $x_i^{(k)}$  defines a solution:  $x_i^{(k)} > 0$  if the  $k$ -th alternative is selected at the  $i$ -th vertex, and  $x_i^{(k)} = 0$ , if another solution is chosen. It is also necessary: introduce Boolean variables  $\delta_i^{(k)}$  (to ensure the uniqueness of solutions and the formation of conditions for the dependence of the vertices: here  $k$  is the operator,  $i$  is vertex of the SMDMP).

Let's make the matrix [Qmj] consisting of zeros and ones and each row of which determines one of the possible groups ("teams") of operators for joint work in the information space. The number of matrix rows is the number of possible groups, the number of matrix columns is  $K_0$ . We can formalize our task as follows:

$$P_r^m = \sum_l \sum_{i=r+1}^N \sum_{k \in K_i} P_{i r_i}^{(k)} x_i^{(k)} \rightarrow \max \quad (5)$$

$$\sum_{k \in K} x_j^{(k)} - \sum_{i=r+1}^N \sum_{k \in K} P_{ij}^{(k)} x_i^{(k)} = a_j, \quad j = r+1, r+2, \dots, N \quad (6)$$

$$\sum_{i=r+1}^N \sum_j \sum_{k \in K_i} P_{ij}^{(k)} T_{ij}^{(k)} x_i^{(k)} \leq T_0 \quad (7)$$

$$\sum_{k \in K_i} \delta_i^{(k)} q_{mk} = 1, \text{ at all } i \quad (8)$$

$$\delta_l^{(k)} = \delta_v^{(k)} = \dots = \delta_n^{(k)}, \text{ at all } k \in K \quad (9)$$

$$x_i^{(k)} - M \delta_i^{(k)} \leq 0, \text{ at all } i \text{ and all } k \in K_i \quad (10)$$

$$x_i^{(k)} - w \delta_i^{(k)} \geq 0, \text{ at all } i \text{ and all } k \in K_i \quad (11)$$

$$\sum_{j=1}^r \sum_{i=r+1}^N \sum_{k \in K_i} P_{ij}^{(k)} x_i^{(k)} = 1 \quad (12)$$

$$x_i^{(k)} \geq 0, \text{ at all } i \text{ and all } k \in K_i. \quad (13)$$

Here  $M$  and  $w$  are a very large and very small numbers.

This task can be easily solved in the environment of any decision support system.

## 4 Conclusion

The share of group operator activity is growing sharply in modern management systems. The reliability of control processes substantially depends on the optimality of the distribution of functions between individual operators. The proposed model of organizing group activities takes into account the reliability and time characteristics of the operators, their compatibility with each other and maximizes the probability of error-free execution of tasks, entering the system. The development was tested during the practical design and operation of control systems for various purposes and can be recommended for building decision support systems for operators of control systems.

## References

1. Zhong, R. Y., Xu, X., Klotz, E. et al.: Intelligent manufacturing in the context of industry 4.0: a review. *Engineering*, **3**(5), 616–630, (2017).
2. Xu, M P., Wang, J., Yang, M., Wang, W., Bai, Y. and Song, Y.: Analysis of operator support method based on intelligent dynamic interlock in lead-cooled fast reactor simulator. *Annals of Nuclear Energy*, **99**, 279–282, (2017).
3. Li, P. C., Zhang, L., Dai, L. C. and Li, X. F.: Study on operator's SA reliability in digital NPPs. *Annals of Nuclear Energy*, **102**, 168–178, (2017).
4. Ogurtsov, E.S., Kokoreva, V.A., Ogurtsov, S.F., Usenbay, T.A., Kunesbekov, A.S., Lavrov, E. A.: Microcontroller navigation and motion control system of the underwater robotic complex. *ARN Journal of Engineering and Applied Sciences*, **11**(9), 3110-3121, (2016).
5. Sedov, V. A., Sedova, N. A. and Glushkov, S. V.: The fuzzy model of ships collision risk rating in a heavy traffic zone. *Vibroengineering PROCEDIA*, **8**, 453–458, (2016).
6. Verkhova, G. V., Akimov, S. V.: Electronic educational complex for training specialists in the field of technical systems management. In *Proceedings of IEEE II International Conference on Control in Technical Systems (CTS)*, pp. 26–29, (2017).
7. Semingson, P., Crosslin, M., Dellinger, J.: Microlearning as a tool to engage students in online and blended learning. In *Proceedings of Society for Information Technology & Teacher Education International Conference*, pp. 474–479, (2015).
8. Ashraf, A., El-Bakry, H. and Samir Abd El-razek, M.: Handling Big Data in E-Learning. *Journal of Advanced Research in Computer Science & Technology*, **3**(1), 47–51, (2015).
9. Lavrov, E. and Lavrova, O.: Intelligent adaptation method for human-machine interaction in modular E-learning systems. In *Proceedings of the 15th International Conference on ICT in Education, Research and Industrial Applications. Integration, Harmonization and Knowledge Transfer. Volume II: Workshops, Kherson, Ukraine*, pp.1000-1010, (2019).
10. Bloomfield, R., Lala, J.: Safety-Critical Systems. The Next Generation. In *IEEE Security & Privacy*, **11**(4), pp. 11-13, (2013).
11. Lavrov, E., Volosiuk, A., Pasko, N., Gonchar, V. and Kozhevnikov, G.: Computer Simulation of Discrete Human-Machine Interaction for Providing Reliability and Cyber-security of Critical Systems. In *Proceedings of the Third International Conference Ergo-2018, St. Petersburg, Russia*, pp. 67–70, (2018). <https://doi.org/10.1109/ERGO.2018.8443846>

12. Basan, E., Basan, A. and Makarevich, O.: Evaluating and Detecting Internal Attacks in a Mobile Robotic Network. In 2018 International Conference on Cyber-Enabled Distributed Computing and Knowledge Discovery (CyberC), Zhengzhou, China, pp.516-5168, (2018).
13. Zhirabok, A. N., Kalinina, N. A. and Shumskii, A. E.: Technique of monitoring a human operator's behavior in man-machine systems. *Journal of Computer and Systems Sciences International*, **57**(3), 443–452, (2018).
14. Xu, M P., Wang, J., Yang, M., Wang, W., Bai, Y., and Song, Y.: Analysis of operator support method based on intelligent dynamic interlock in lead-cooled fast reactor simulator. *Annals of Nuclear Energy*, **99**, 279–282, (2017).
15. Cacciabue, P. C.: Human error risk management for engineering systems: a methodology for design, safety assessment, accident investigation and training. *Reliab. Engineering & Syst.Saf.***83**(2), 229–269, (2014). <https://doi.org/10.1016/j.res.2003.09.013>
16. J. Dul, R. Bruder, P. Buckle, P. Carayon, P. Falzon and W. S. Marraset, “A Strategy for human factors/ergonomics: developing the discipline and profession,” *Ergonomics*, vol. 55(4), pp. 377–395, (2012). <https://doi.org/10.1080/00140139.2012.661087>
17. Havlikovaa, M., Jirglb, M. and Bradac, Z.: Human Reliability in Man-Machine Systems. *Procedia Engineering*, **100**, 1207–1214, (2015).
18. Adamenko, A.N., et al.: Information controlling human-machine systems: research, design, testing, Reference book. In: Gubinsky, A.I., Evgrafov, V. G. (eds.) *Mechanical Engineering*, Moscow (1993). (In Russian).
19. Grif, M.G., Sundui, O. and Tsoy, E.B.: Methods of desingning and modeling of man-machine systems. In Proc. of Int. Summer workshop Computer Science, pp.38–40, (2014).
20. Chabanenko, P. P. Research of the safety and efficiency of the functioning of systems “human – technics” by ergonomic networks. Sevastopol(2012), (In Russian).
21. Drakaki, M. and Tzionas, P.:Manufacturing Scheduling Using Colored Petri Nets and Reinforcement Learning. *Applied Sciences*, **7**(2), 136, (2017).
22. Lavrov, E., Pasko, N.: Automation of assessing the reliability of operator's activities in contact centers that provide access to information resources. In Proceedings of the 14th International Conference on ICT in Education, Research and Industrial Applications. Integration, Harmonization and Knowledge Transfer, Kyiv, Ukraine, **1**,pp. 445-448, (2018).
23. Lavrov, E., Pasko, N., Lavrova, O. and Savina, N.: Models for the Description of Man-Machine Interaction for the Tasks of Computer-Aided Assessment of the Reliability of Automated Systems. 2019 3rd International Conference on Advanced Information and Communications Technologies (AICT), Lviv, Ukraine, 2019, pp. 176–181, (2019). <https://doi.org/10.1109/AIACT.2019.8847767>
24. Lavrov, E., Pasko, N., Siryk, O., Burov, O. and Natalia, M.: Mathematical Models for Reducing Functional Networks to Ensure the Reliability and Cybersecurity of Ergatic Control Systems. 2020 IEEE 15th International Conference on Advanced Trends in Radioelectronics, Telecommunications and Computer Engineering (TCSET), Lviv-Slavske, Ukraine, 2020, pp. 179-184, (2020). <https://doi: 10.1109/TCSET49122.2020.235418>.
25. Bentley, T. A., Teo, S. T. T., McLeod, L., Tana, F., Bosua, R. and Gloet, M.: The role of organisational support in teleworker wellbeing: A socio-technical systems approach. *Applied Ergonomics*, **52**, 207–215, (2016). <https://doi.org/10.1016/j.apergo.2015.07.019>
26. Popovich, P. R., Gubinskiy, A. I. and Kolesnikov, G.M.: Ergonomic support of astronauts' activities. Moscow, Russia: Mechanical Engineering, 1985. (In Russian).
27. Anokhin, A., Gorodetskiy, I., Lvov, V. and Paderno, P.: Education and professional development of ergonomists in Russia. In Proc. of International Conference in Applied Human Factors and Ergonomics 2014 and the Affiliated Conferences, pp.1017–1024, (2014).