

LiDAR Spoofing Meets the New-Gen: Capability Improvements, Broken Assumptions, and New Attack Strategies

Takami Sato^{*}, Yuki Hayakawa^{*}, Ryo Suzuki^{*}, Yohsuke Shiiki^{*},
Kentaro Yoshioka, and Qi Alfred Chen

AS²Guard

Autonomous & Smart Systems
Guard Research Group

UCI




Keio University



^{*}co-first authors


LiDAR plays an essential role in Autonomous Driving (AD)

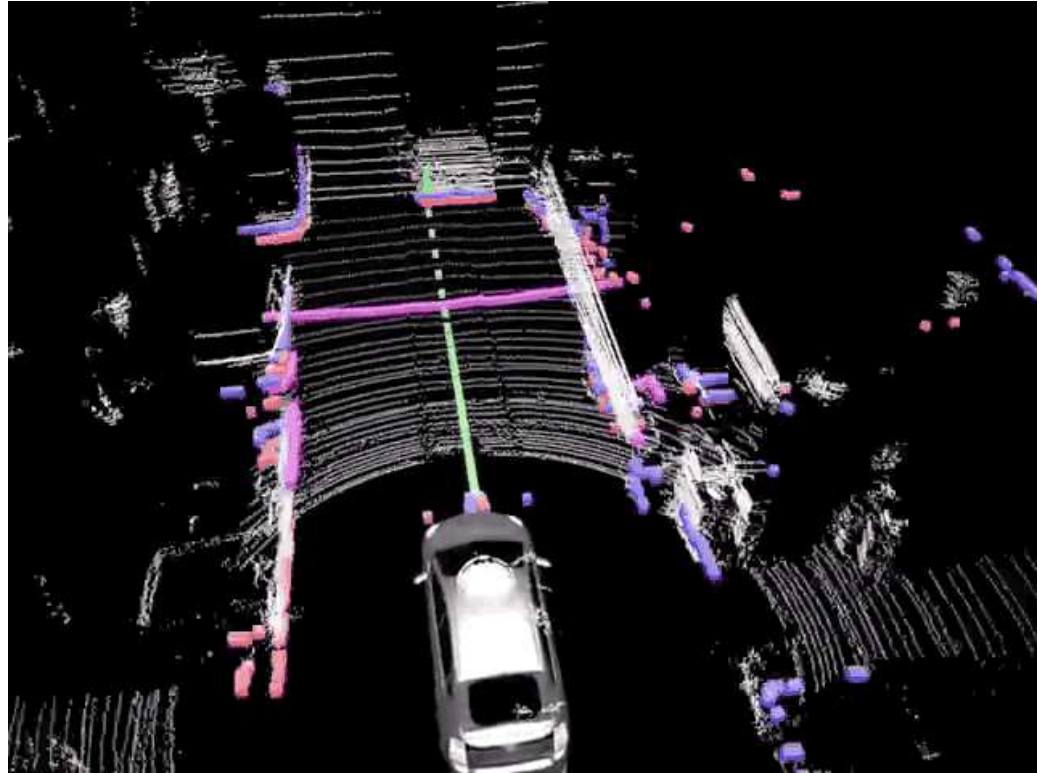

Current Level-4 AD heavily relies on LiDAR sensing for object detection

LiDAR spoofing attack



LiDAR keeps emitting lasers to everywhere

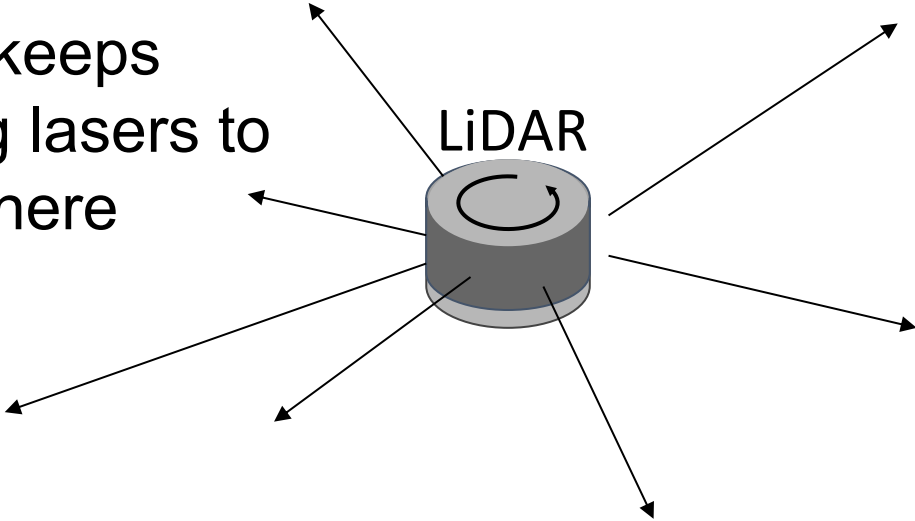

LiDAR spoofing attack

$$\text{distance} = \text{Light Speed} \times \text{Flight Time} \div 2$$




LiDAR senses distance to object based on ToF (time-of-flight)

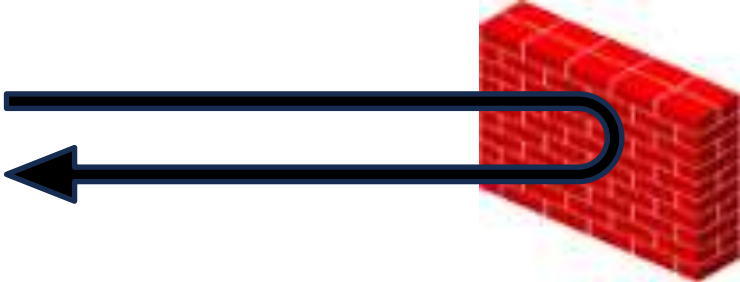

LiDAR spoofing attack


$$\text{distance} = \text{Light Speed} \times \text{Flight Time} \div 2$$

LiDAR senses distance to object based on ToF (time-of-flight)

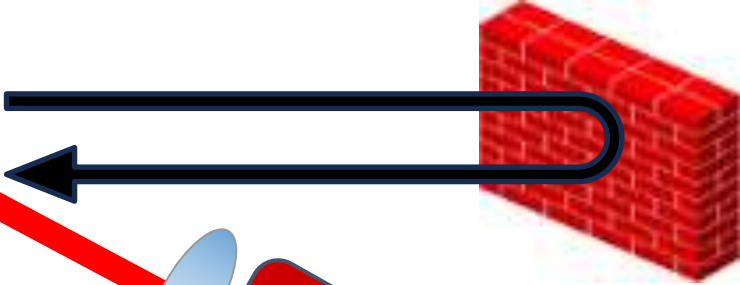

Generally vulnerable to Laser from other source by design, LiDAR Spoofing Attack

Limitations in prior works


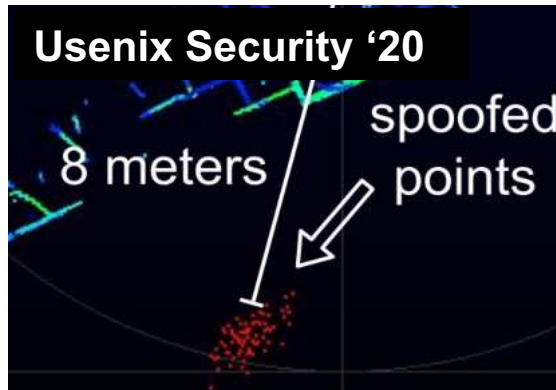


No prior attack shows precise injection pattern control: Chosen Pattern Injection (CPI)

- Despite CPI is **essential assumption for their adversarial attack** against ML models
- Only evaluated on a specific LiDAR (VLP-16) **w/o recent security-related features**
 - e.g., timing randomization and pulse fingerprinting



Limitations in prior works

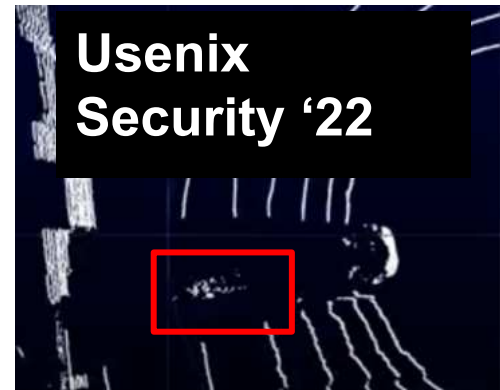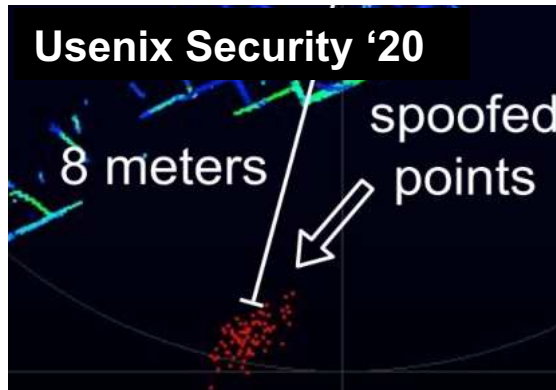










No prior attack shows precise injection pattern control: Chosen Pattern Injection (CPI)

- Despite CPI is **essential assumption for their adversarial attack** against ML models
- Only evaluated on a specific LiDAR (VLP-16) **w/o recent security-related features**
 - e.g., timing randomization and pulse fingerprinting










- Concurrent work [Jin et al., IEEE S&P'23] has demonstrated CPI attack capability, but, only on 2 LiDARs (VLP-16 and RS-16) **w/o systematic study on security-related features**
 - Meanwhile, our attack is **>1.5x stronger with >7k (vs ~4.2k) point injection**



Our work: First large-scale study on New-Gen LiDARs

	Velodyne			Leddar	Ouster	Intel	Livox	Hesai	Robosense
									
	VLP-16 [15]	VLP-32c [18]	VLS-128 [39]	Pixell [40]	OS1-32 [22]	Realsense L515 [41]	Horizon [42]	XT32 [24]	Helios 5515 [23]
Gen. (year)	1st-G (2016)	1st-G (2017)	1st-G (2017)	New-G (2019)	New-G (2019)	New-G (2019)	New-G (2020)	New-G (2020)	New-G (2021)
Scanning Type	Rotating	Rotating	Rotating	Flash	Rotating	MEMS	MEMS	Rotating	Rotating
Wavelength	905 nm	905 nm	905 nm	905 nm	865 nm	860 nm	905 nm	905 nm	905 nm
Vertical FOV	30°	40°	40°	16°	45°	55°	25.1°	31°	70°
Horizontal FOV	360°	360°	360°	180°	360°	70°	81.7°	360°	360°
Max. Range [m]	100	200	300	56	120	9	260	120	150
Min. Range [m]	1	1	0.5	0.1	0.3	0.25	0.5	0	0.2
Vertical Channel	16	32	128	8	32	-	-	32	32
Simul. Firing	1	2	8	3	32	1	1	1	1
Timing Random.				✓	✓	✓	✓		✓
Fingerprinting								✓	










Our work: First large-scale study on New-Gen LiDARs

	Velodyne			Leddar	Ouster	Intel	Livox	Hesai	Robosense
									
	VLP-16 [15]	VLP-32c [18]	VLS-128 [39]	Pixell [40]	OS1-32 [22]	Realsense L515 [41]	Horizon [42]	XT32 [24]	Helios 5515 [23]
Gen. (year)	1st-G (2016)	1st-G (2017)	1st-G (2017)	New-G (2019)	New-G (2019)	New-G (2019)	New-G (2020)	New-G (2020)	New-G (2021)
Scanning Type	Rotating	Rotating	Rotating	Flash	Rotating	MEMS	MEMS	Rotating	Rotating
Wavelength	905 nm	905 nm	905 nm	905 nm	865 nm	860 nm	905 nm	905 nm	905 nm
Vertical FOV	30°	40°	40°	16°	45°	55°	25.1°	31°	70°
Horizontal FOV	360°	360°	360°	180°	360°	70°	81.7°	360°	360°
Max. Range [m]	100	200	300	56	120	9	260	120	150
Min. Range [m]	1	1	0.5	0.1	0.3	0.25	0.5	0	0.2
Vertical Channel	16	32	128	8	32	-	-	32	32
Simul. Firing	1	2	8	3	32	1	1	1	1
Timing Random.				✓	✓	✓	✓		✓
Fingerprinting								✓	

- Cover 9 LiDARs including both 1st and **New-Gen LiDARs**










System-on-Chip (SoC) approach allows New-Gen LiDARs more complex signal processing.
e.g., timing randomization & pulse fingerprinting

Our work: First large-scale study on New-Gen LiDARs

	Velodyne			Leddar	Ouster	Intel	Livox	Hesai	Robosense
									
	VLP-16 [15]	VLP-32c [18]	VLS-128 [39]	Pixell [40]	OS1-32 [22]	Realsense L515 [41]	Horizon [42]	XT32 [24]	Helios 5515 [23]
Gen. (year)	1st-G (2016)	1st-G (2017)	1st-G (2017)	New-G (2019)	New-G (2019)	New-G (2019)	New-G (2020)	New-G (2020)	New-G (2021)
Scanning Type	Rotating	Rotating	Rotating	Flash	Rotating	MEMS	MEMS	Rotating	Rotating
Wavelength	905 nm	905 nm	905 nm	905 nm	865 nm	860 nm	905 nm	905 nm	905 nm
Vertical FOV	30°	40°	40°	16°	45°	55°	25.1°	31°	70°
Horizontal FOV	360°	360°	360°	180°	360°	70°	81.7°	360°	360°
Max. Range [m]	100	200	300	56	120	9	260	120	150
Min. Range [m]	1	1	0.5	0.1	0.3	0.25	0.5	0	0.2
Vertical Channel	16	32	128	8	32	-	-	32	32
Security									
Simul. Firing	1	2	8	3	32	1	1	1	1
Timing Random.				✓	✓	✓	✓		✓
Fingerprinting								✓	

- Cover 9 LiDARs including both 1st and **New-Gen LiDARs**
- Evaluate **3 security-related features** in mainly New-Gen LiDARs
 - **Simultaneous Laser Firing**
 - **Laser Timing Randomization**
 - **Pulse Fingerprinting**

Our work: First large-scale study on New-Gen LiDARs


	Velodyne			Leidar	Ouster	Intel	Livox	Hesai	Robosense
									
	VLP-16 [15]	VLP-32c [18]	VLS-128 [39]	Pixell [40]	OS1-32 [22]	Realsense L515 [41]	Horizon [42]	XT32 [24]	Helios 5515 [23]
Gen. (year)	1st-G (2016)	1st-G (2017)	1st-G (2017)	New-G (2019)	New-G (2019)	New-G (2019)	New-G (2020)	New-G (2020)	New-G (2021)
Scanning Type	Rotating	Rotating	Rotating	Flash	Rotating	MEMS	MEMS	Rotating	Rotating
Wavelength	905 nm	905 nm	905 nm	905 nm	865 nm	860 nm	905 nm	905 nm	905 nm
Max. FOV	300°	180°	180°	160°	150°	55°	25-18°	318°	700°

- Identify 15 novel research findings through the large-scale study
- Design a new practical removal attack against New-Gen LiDARs
 - High-Frequency Removal (HFR) Attack
- Evaluate **3 security-related features** in mainly New-Gen LiDARs
 - **Simultaneous Laser Firing**
 - **Laser Timing Randomization**
 - **Pulse Fingerprinting**

Main security-related features in New-Gen LiDARs


Laser Timing Randomization

Randomly perturb laser firing timing

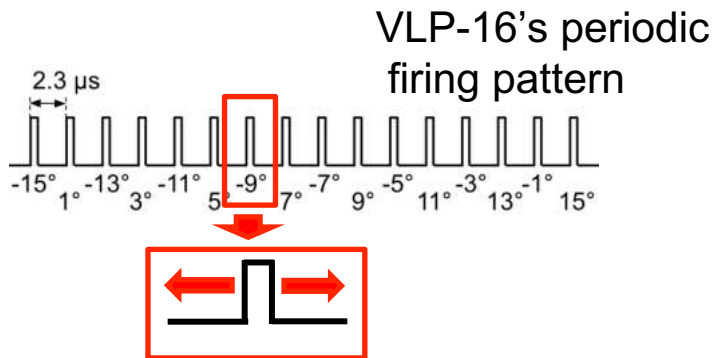

Pulse Fingerprinting


Authenticate their own laser

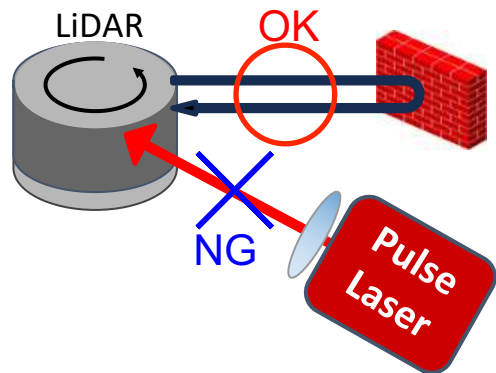

Main security-related features in New-Gen LiDARs

Laser Timing Randomization


Randomly perturb laser firing timing

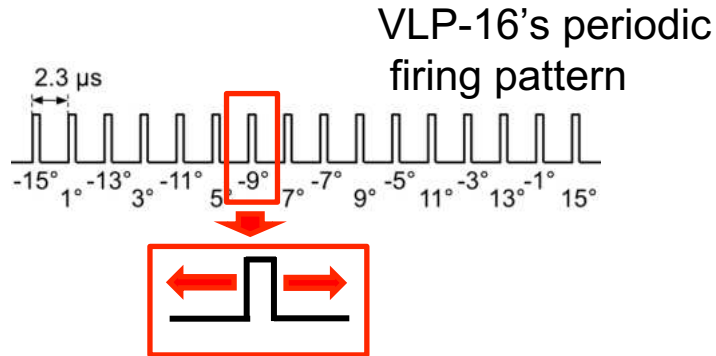

Makes attack impossible to inject points at designed location

Pulse Fingerprinting


Authenticate their own laser

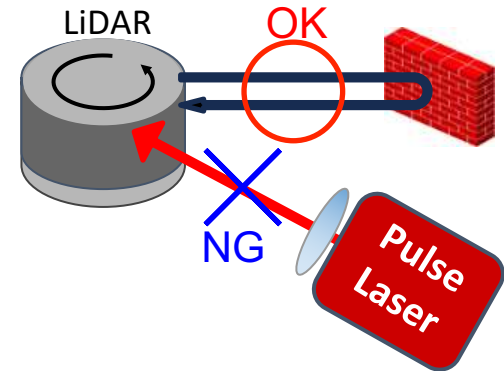

Main security-related features in New-Gen LiDARs

Laser Timing Randomization


Randomly perturb laser firing timing

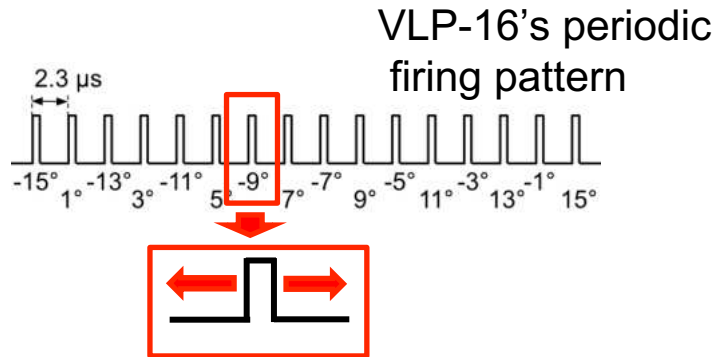

Makes attack impossible to inject points at designed location

Pulse Fingerprinting

Authenticate their own laser

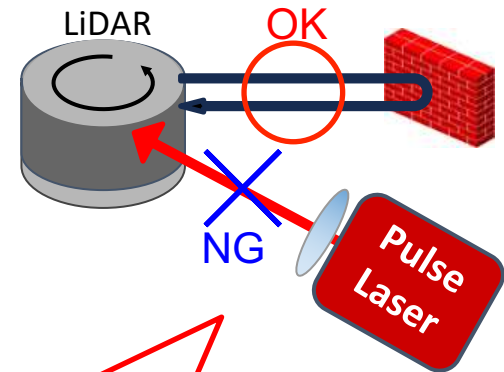


Sounds ultimate defense
But, we found that current one is not strong enough

Overview of our research findings

Attack Device Improvements

- Our new attack device can achieve inject **>6k** points in **>80°**
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

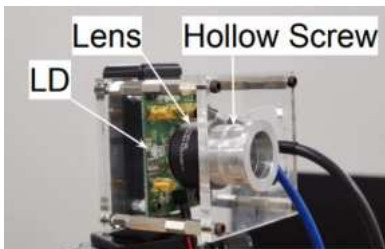


Overview of our research findings

Attack Device Improvements

- Our new attack device can achieve inject **>6k** points in **>80°**
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector


New-Gen LiDAR Measurements & Attack Modeling

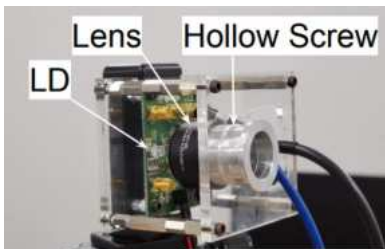

Overview of our research findings

Attack Device Improvements

- Our new attack device can achieve inject **>6k** points in **>80°**
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

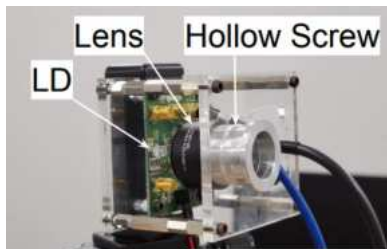

New-Gen LiDAR Measurements & Attack Modeling


New Attack Modeling

Security Analysis w/ 9 object detectors & AD Simulator (Autonomous Driving)

Overview of our research findings

Attack Device Improvements

- Our new attack device can achieve inject **>6k** points in **>80°**
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

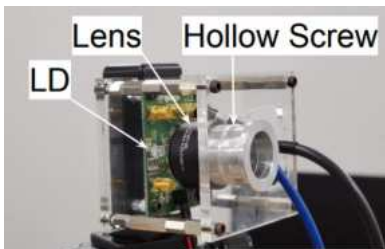

New-Gen LiDAR Measurements & Attack Modeling

Injection Attack

- CPI attack is **feasible only on VLP-16**
- **Pulse fingerprinting is not strong enough** to perfectly prevent injection
- **Error modeling** has major impact

Removal Attack

- **Latest removal attack is not feasible** on New-Gen LiDARs
- **Our HFR attack can be effective** even against New-Gen LiDARs

New Attack Modeling

Security Analysis w/ 9 object detectors & AD Simulator (Autonomous Driving)


- **Pulse fingerprinting is effective mitigation** against injection attacks
- **Timing randomization is effective mitigation** against injection

- **Pulse fingerprinting is effective mitigation** against removal attacks
- Vulnerability of object detector heavily **depends on their training data**
- **HFR attack can be effective against autonomous driving scenarios**

Overview of our research findings

Attack Device Improvements

- Our new attack device can achieve inject >6k points in >80°
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

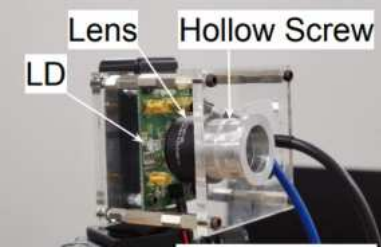


New-Gen LiDAR Measurements & Attack Modeling

Injection Attack

- **CPI attack is feasible only on VLP-16**
- **Pulse fingerprinting is not strong enough** to perfectly prevent injection
- **Error modeling** has major impact

Removal Attack


- **Latest removal attack is not feasible** on New-Gen LiDARs
- **Our HFR attack can be effective** even against New-Gen LiDARs

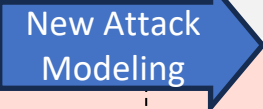

Security Analysis w/ 9 object detectors & AD Simulator (Autonomous Driving)




- **Pulse fingerprinting is effective mitigation** against injection attacks
- **Timing randomization is effective mitigation** against injection
- **Pulse fingerprinting is effective mitigation** against removal attacks
- Vulnerability of object detector heavily **depends on their training data**
- **HFR attack can be effective against autonomous driving scenarios**

CPI attack is feasible, but only on VLP-16

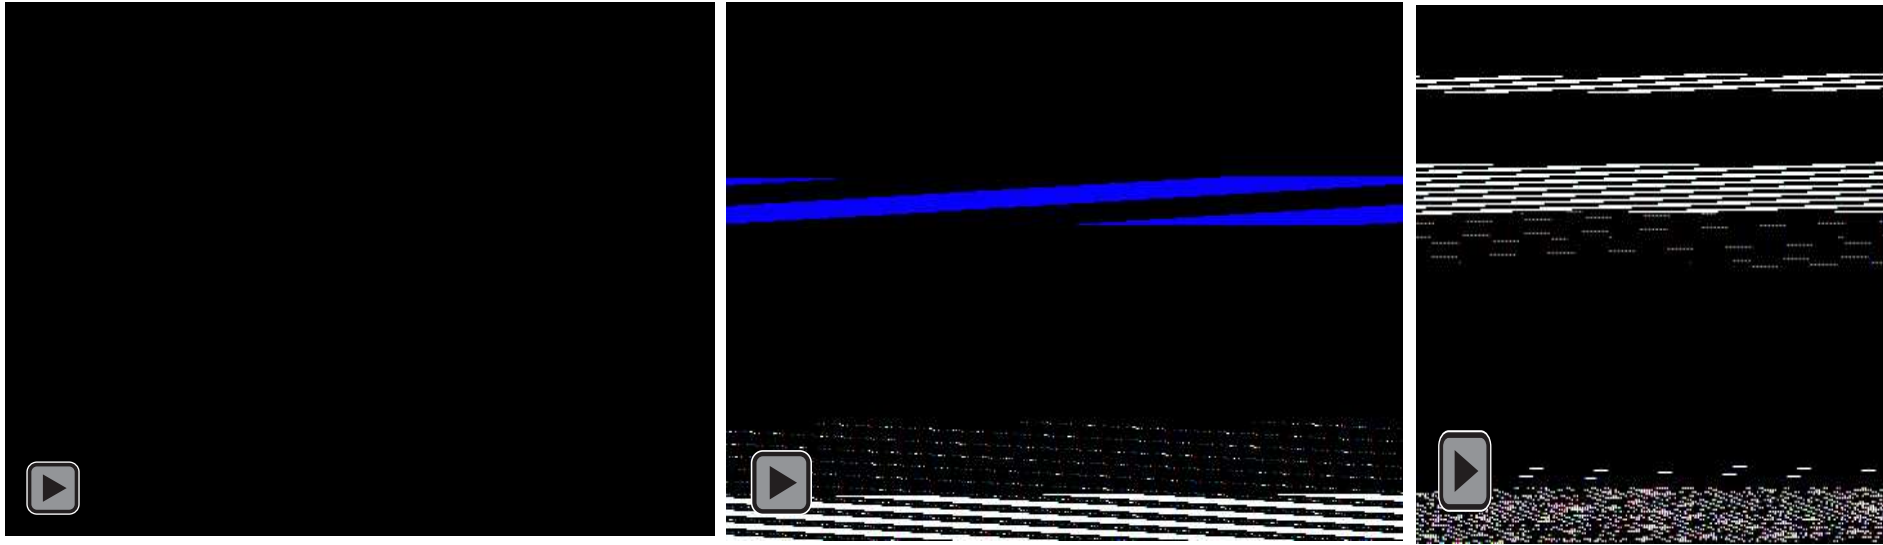


- Successfully inject **6.5k points** in **83° wide range** (**99% success rate**)
- Significantly improve the **optics** and **electronics** of spoofer device

CPI attack is feasible, but only on VLP-16

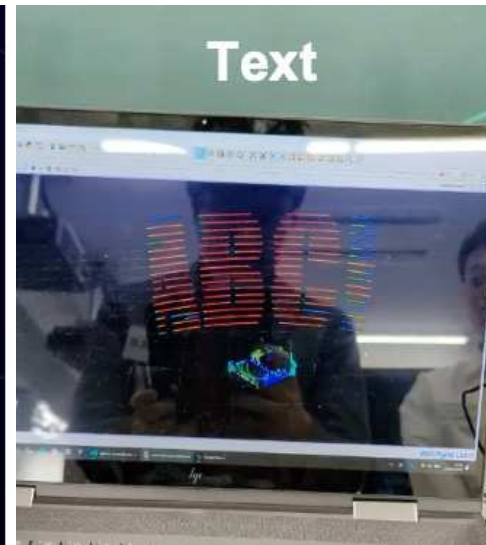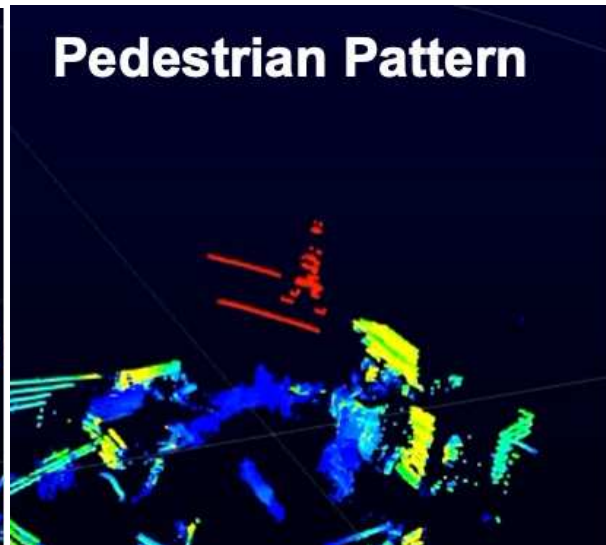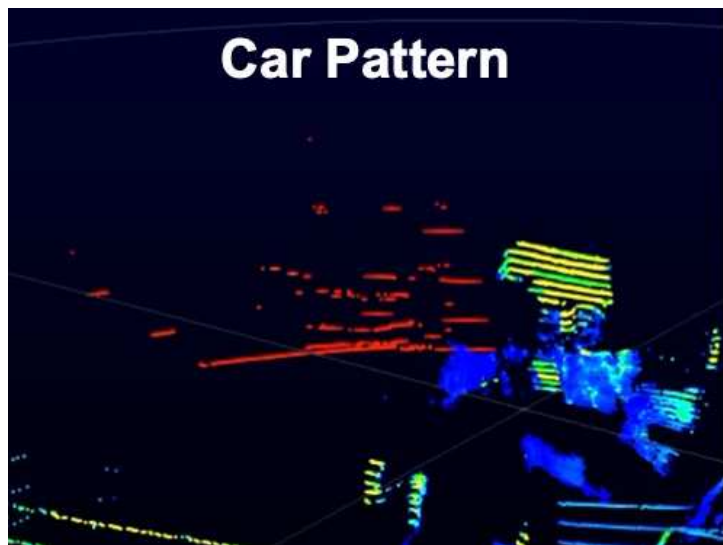


- Successfully inject **6.5k points** in **83° wide range** (**99% success rate**)
 - Significantly improve the **optics** and **electronics** of spoofer device
- Furthermore, **CPI attack only works on VLP-16**
 - Other LiDARs have at least one new security-related features
 - Particularly, due to **timing randomization** and **fingerprinting**

All existing attacks effective against AD are *white-box*

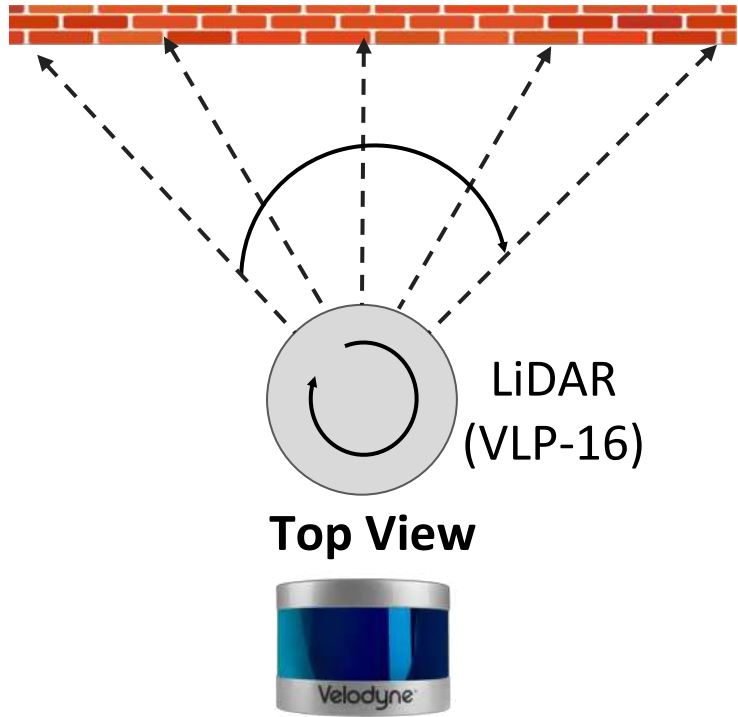

All existing attacks effective against AD are *white-box*

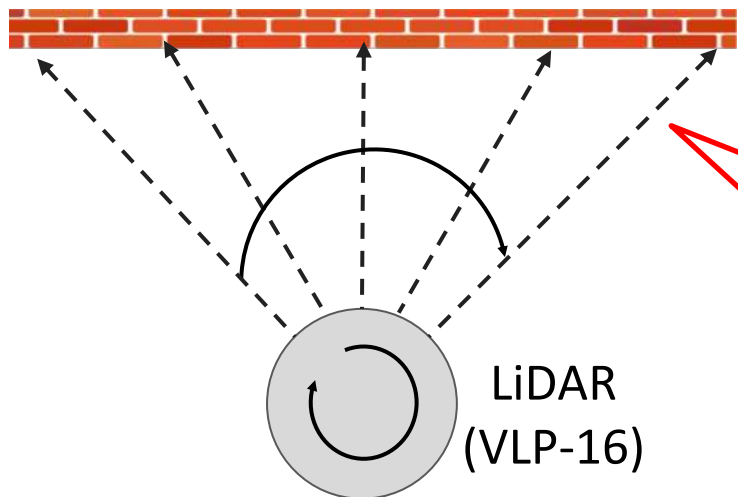


LiDAR
(VLP-16)

Top View




LiDAR scan horizontal
angle one-by-one
(e.g. every 0.1°)


All existing attacks effective against AD are *white-box*

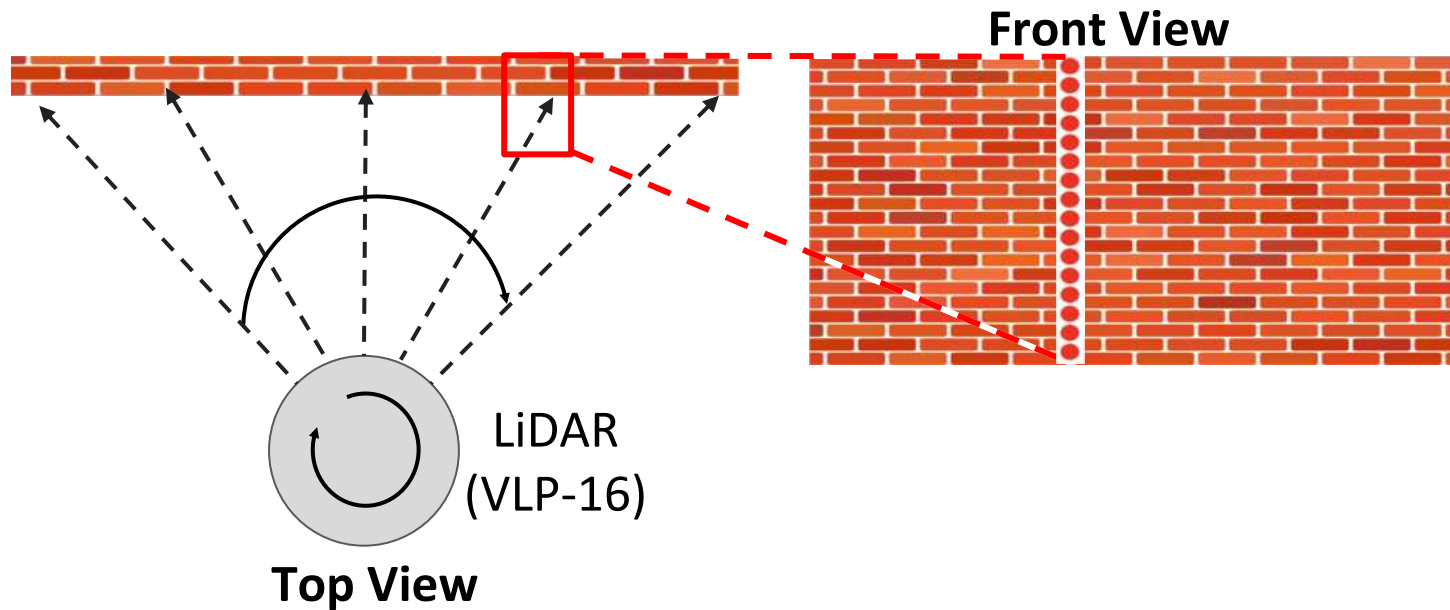

All existing attacks effective against AD are *white-box*

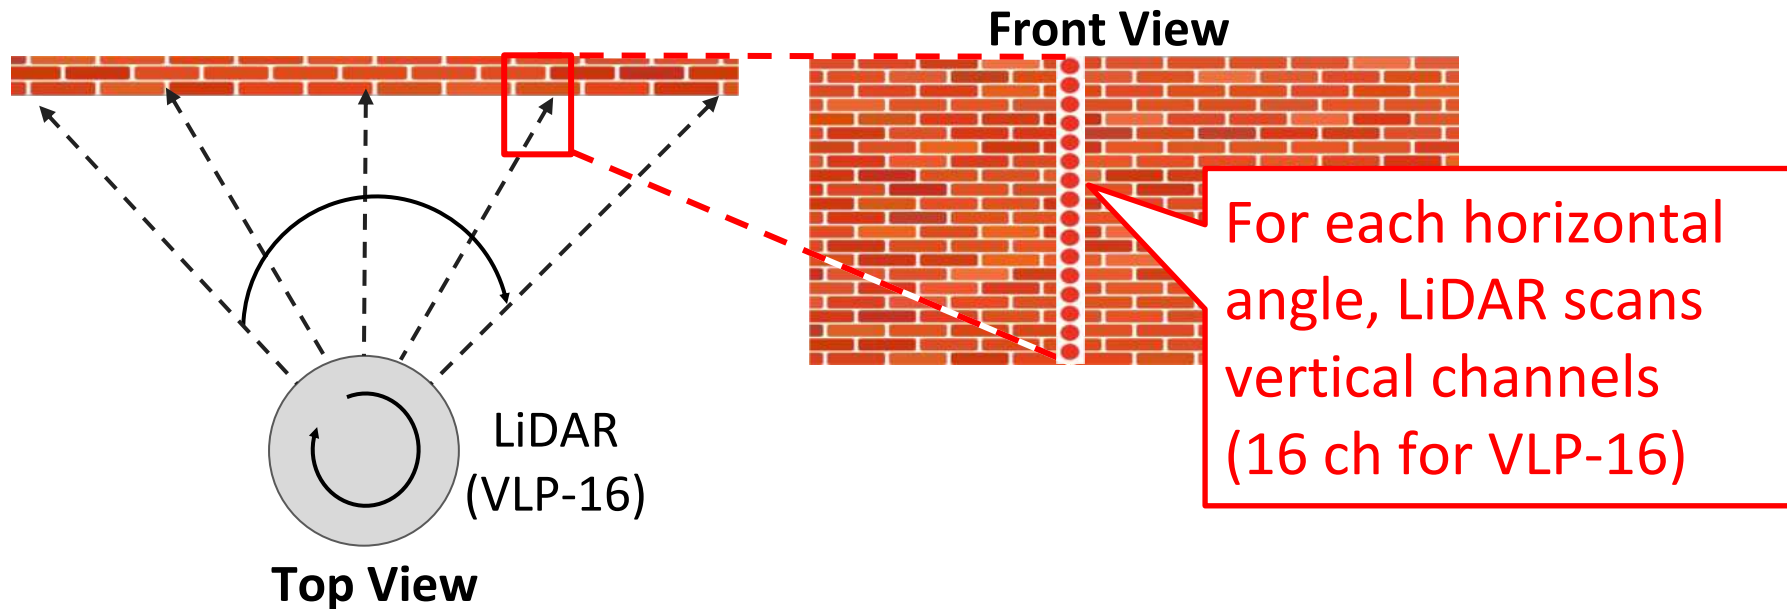


All existing attacks effective against AD are *white-box*

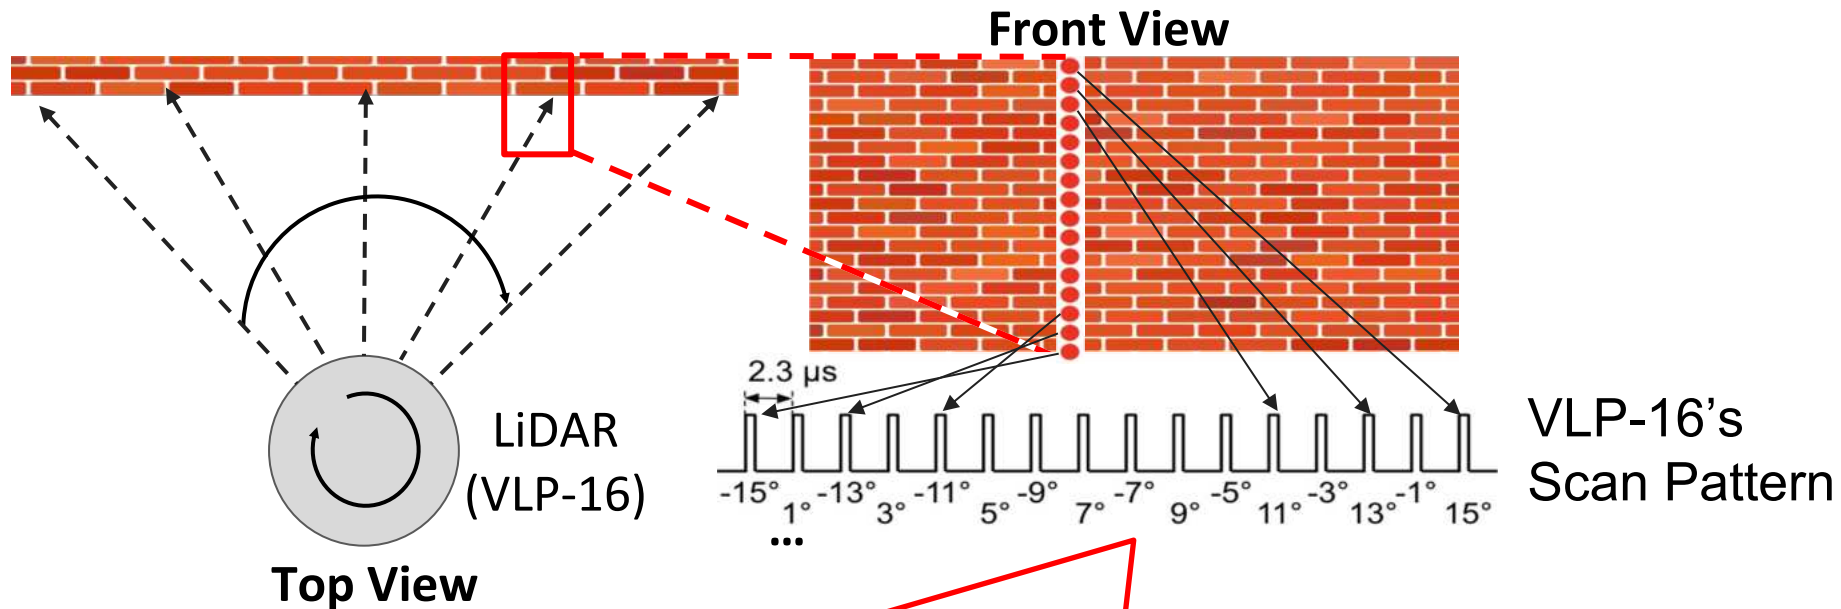

Scan pattern of VLP-16 (1st Gen LiDARs) is deterministic and thus predictable

All existing attacks effective against AD are *white-box*

Attacker first learn the predictable scan pattern via photo detector [PD] (*white-box knowledge*)

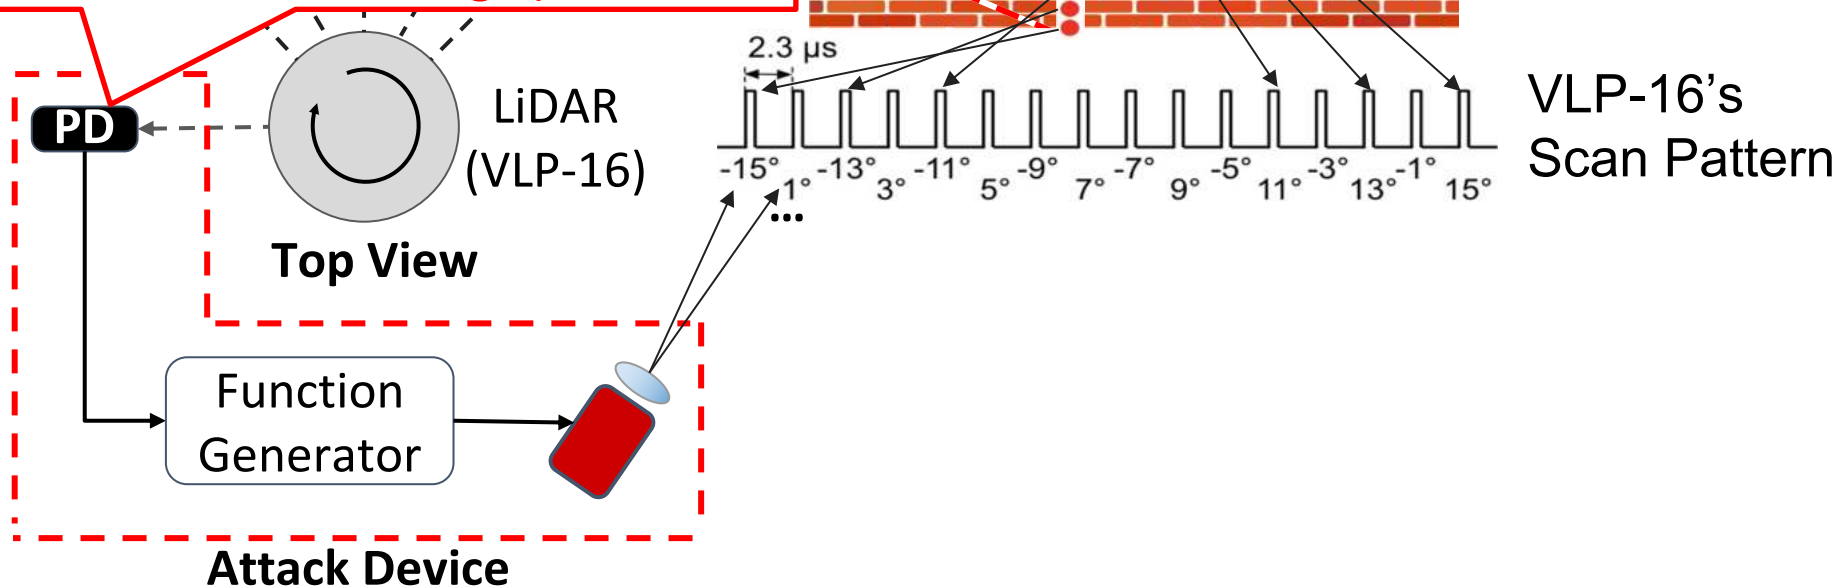

All existing attacks effective against AD are *white-box*

Attacker first learn the predictable scan pattern via


Front View



- **Timing randomization** can directly disrupt this attack
 - 5 out of 6 New-Gen LiDARs in our study have timing randomization
- Existing *black-box* attack is not strong enough for AD
 - Saturating attack [Sin et al, 2017] can dismiss only small area (42 cm x 42 cm) in a short time (~4 sec)

Use malicious lasers to overwrite LiDAR's laser by synchronized with the scan pattern


Function Generator






Attack Device

Our attack: High-Frequency Removal (HFR) attack

White-box attack [PRA attack, Cao et al.,2023]

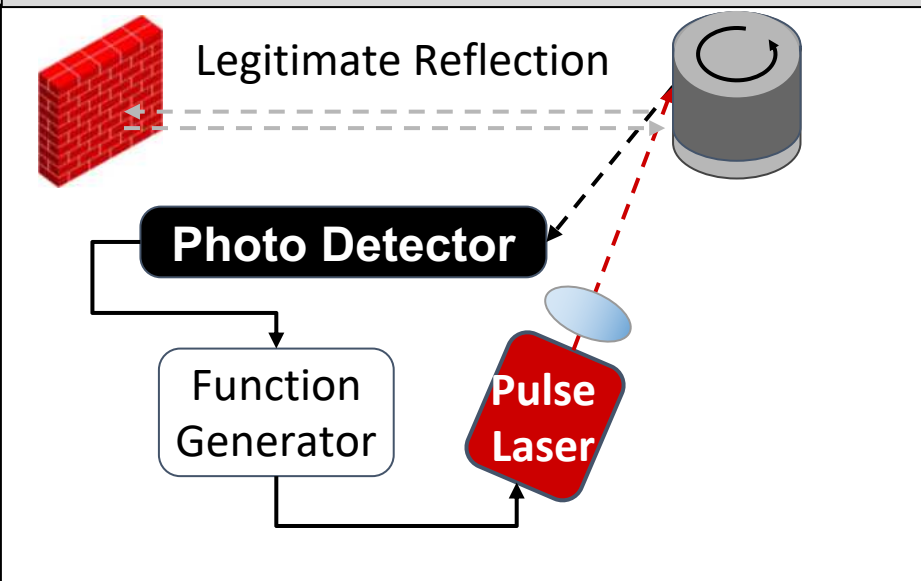



HFR attack (*Ours, black-box*)

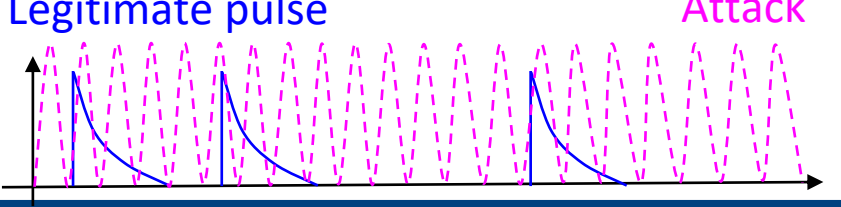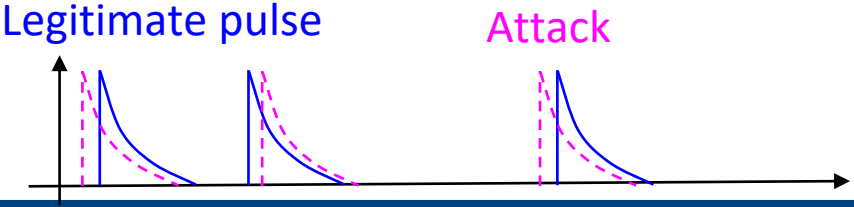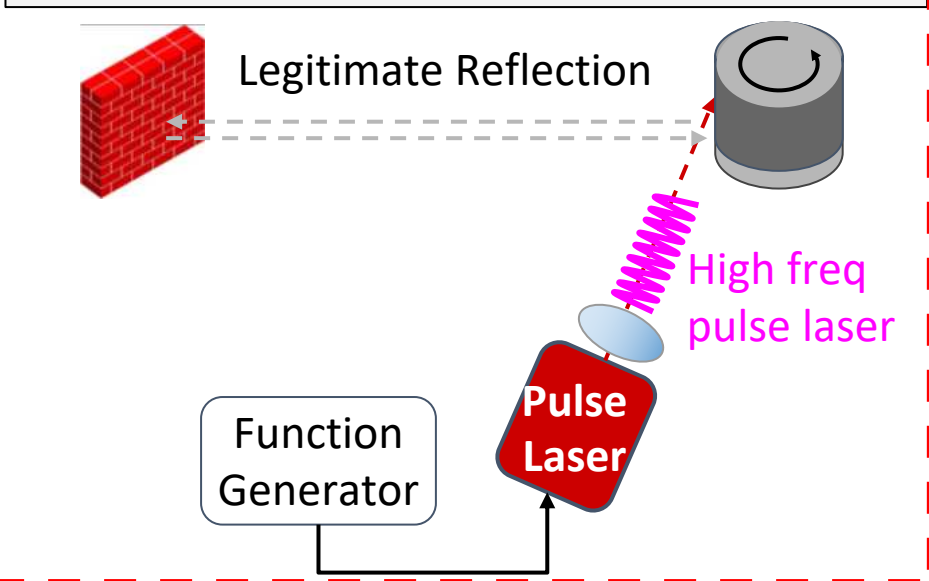

Our attack: High-Frequency Removal (HFR) attack

White-box attack [PRA attack, Cao et al.,2023]

HFR attack (*Ours, black-box*)

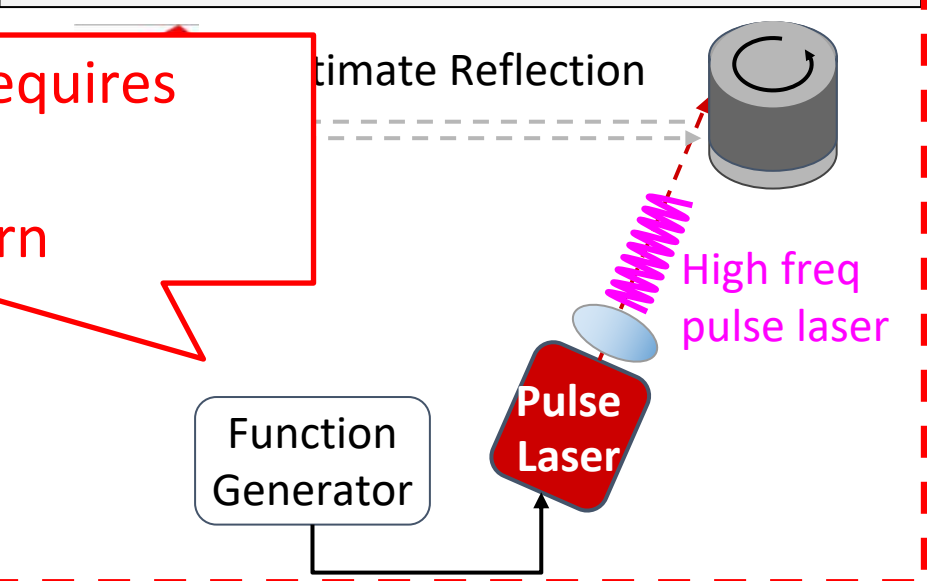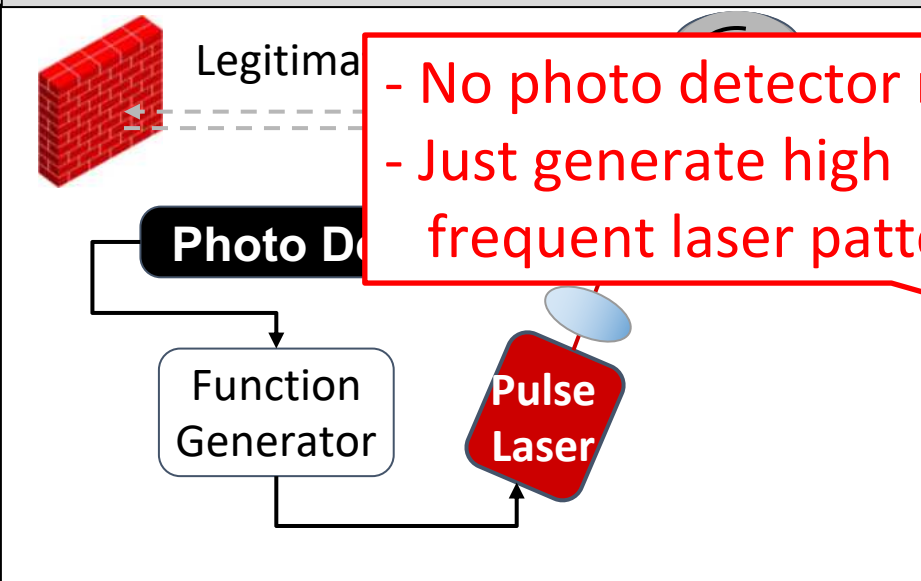

- No photo detector requires
- Just generate high frequent laser pattern


Legitimate pulse

Attack




Legitimate pulse

Attack

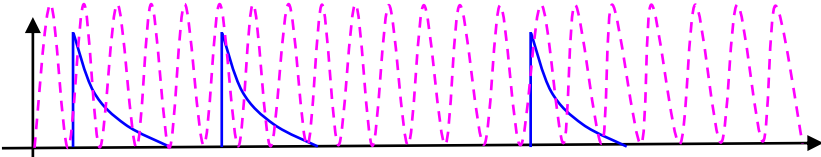


Our attack: High-Frequency Removal (HFR) attack

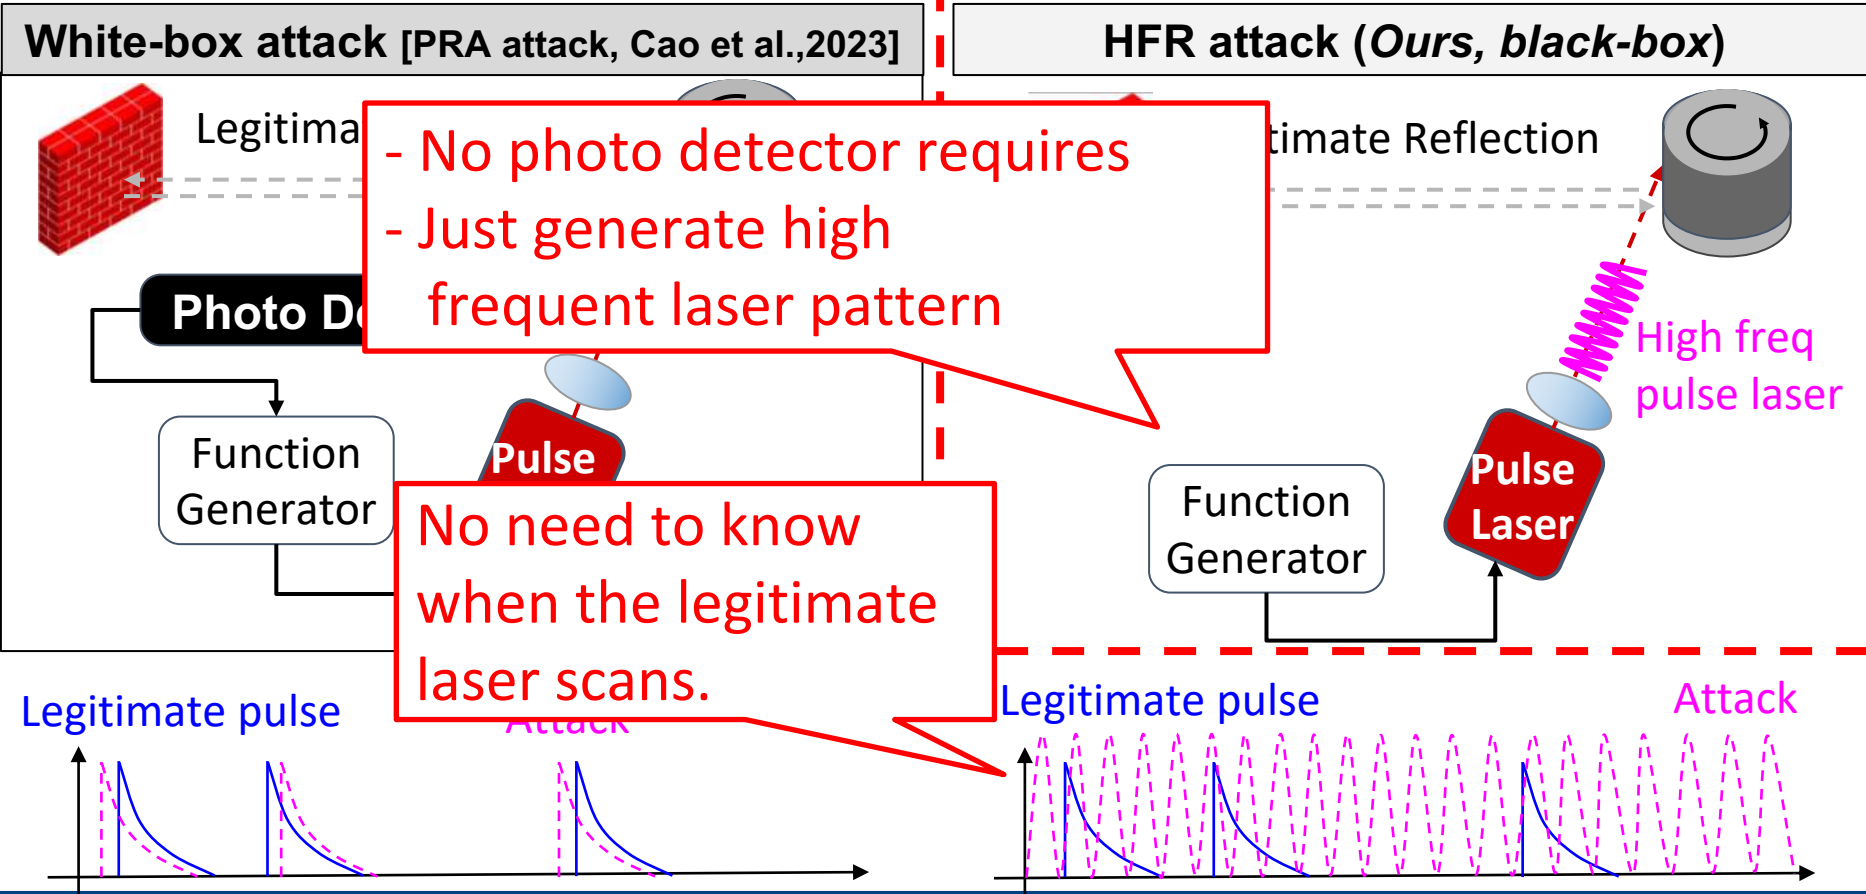


HFR attack indoor demo


Camera

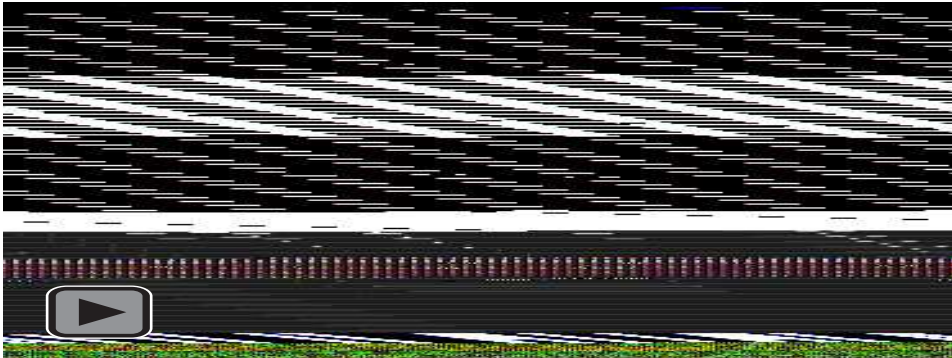



Benign

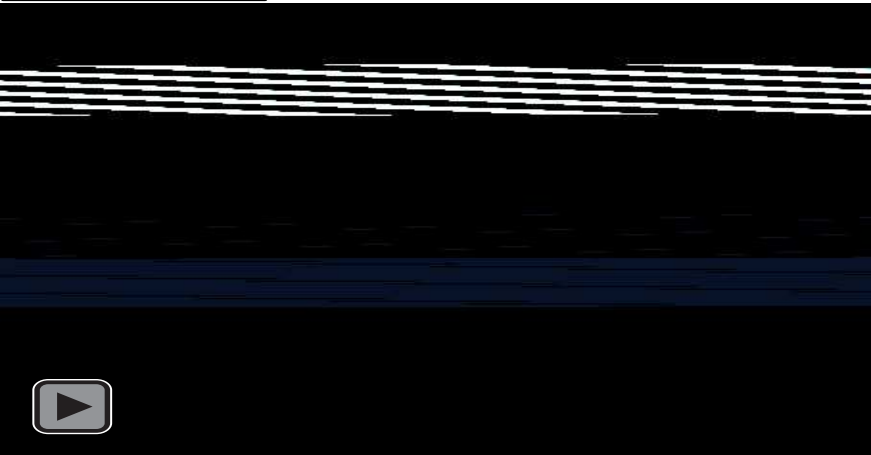


HFR attack

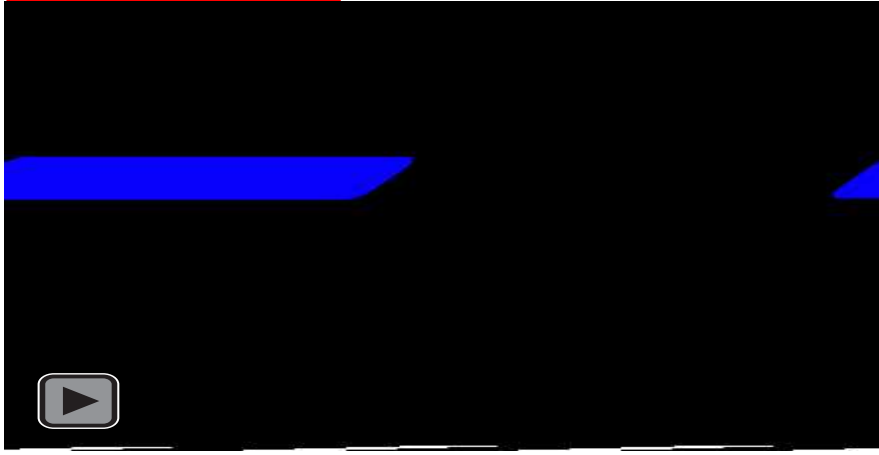

HFR attack indoor demo

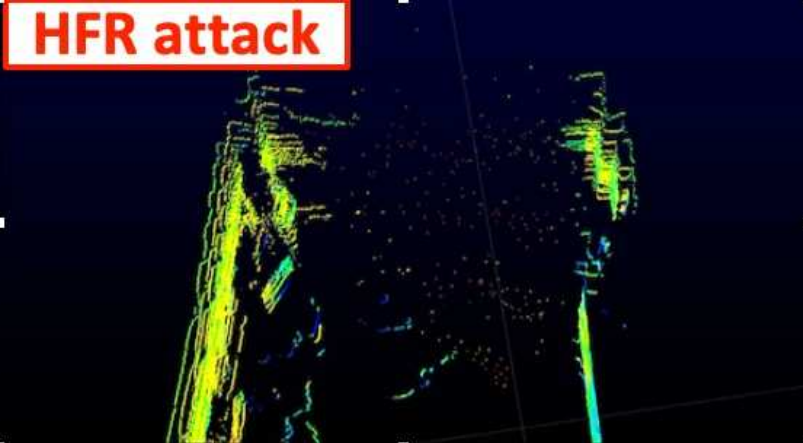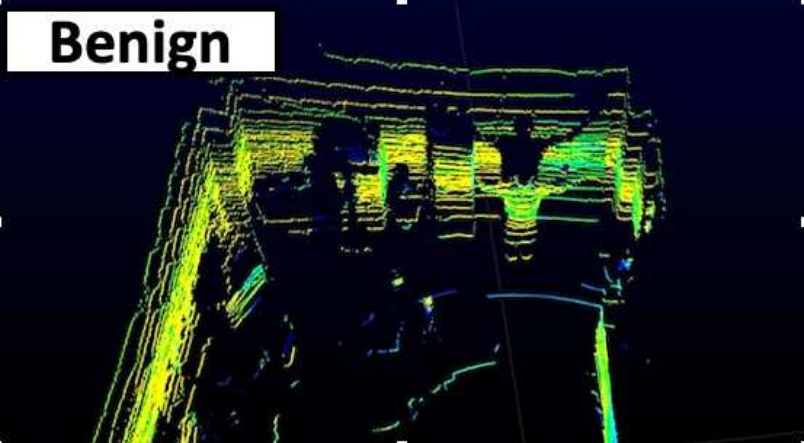


HFR attack outdoor demo

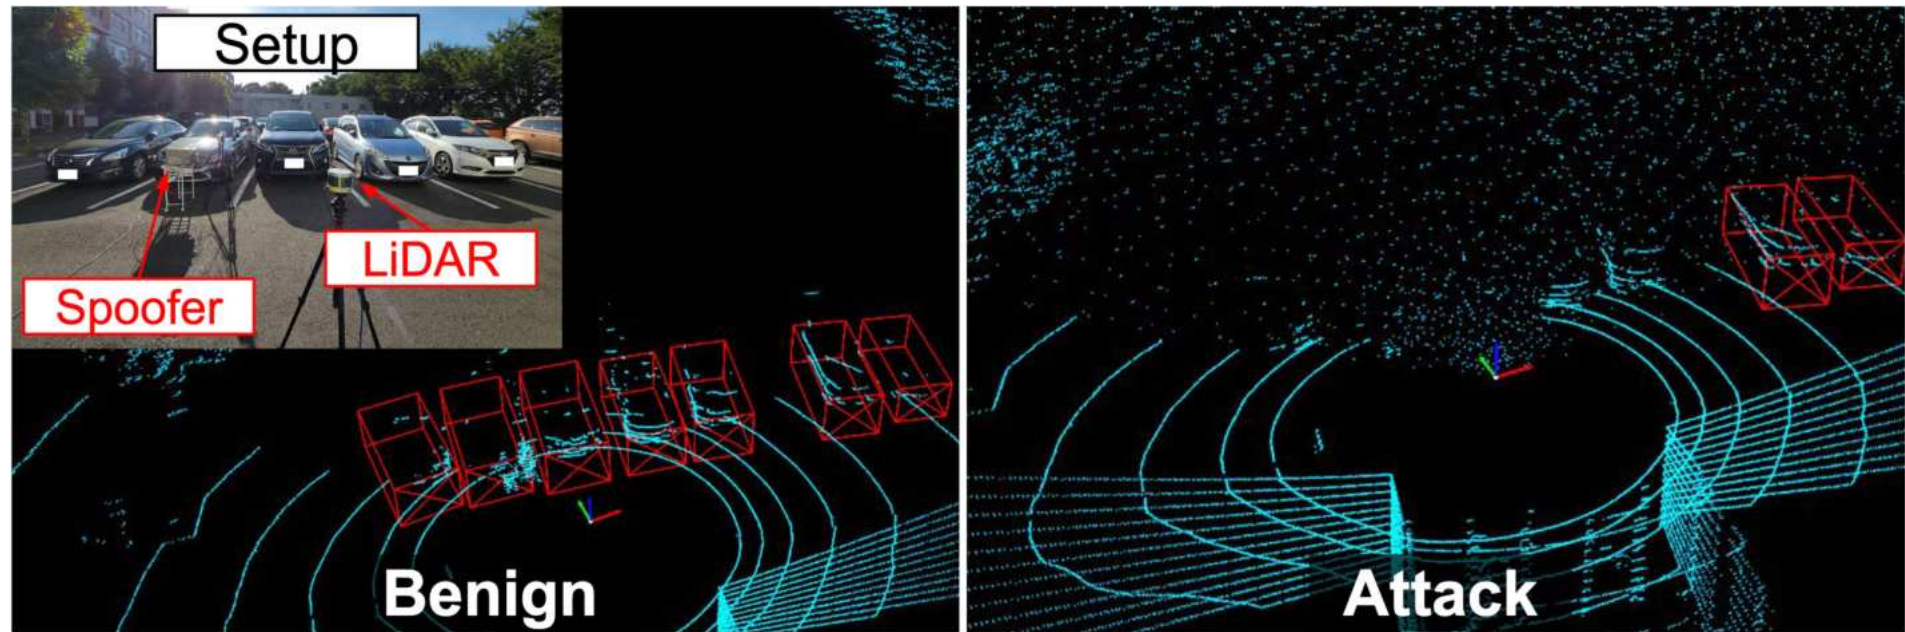


5 cars are not detected by Apollo 6.0's PointPillars object detector

HFR attack outdoor demo

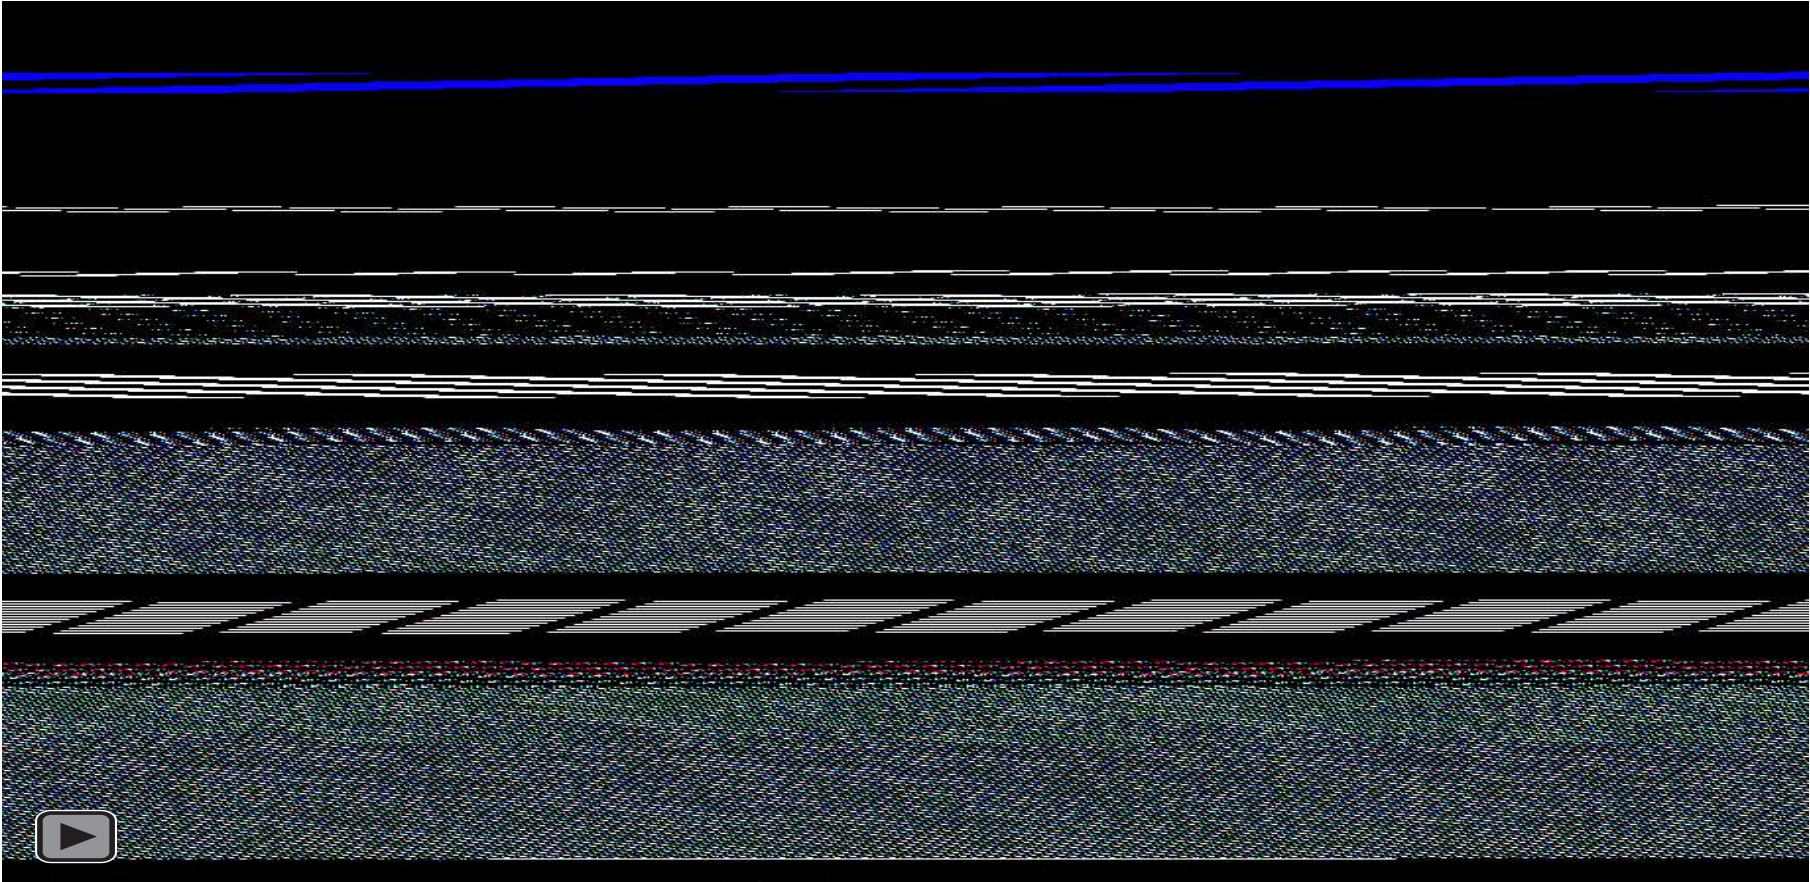


Modeling HFR attack capability

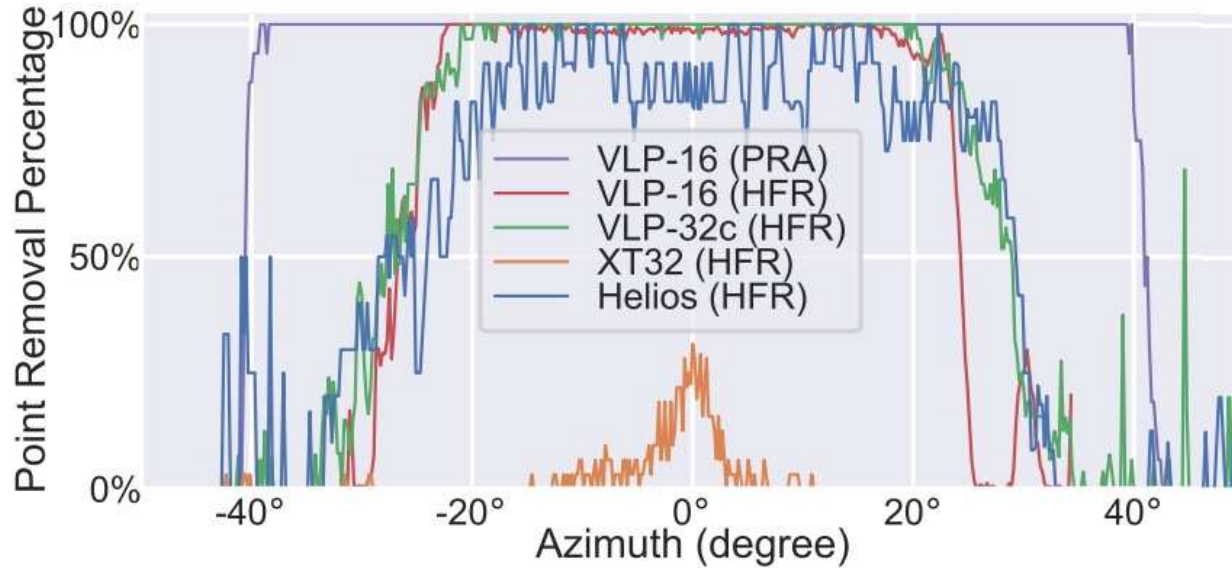

- Measure removal success rates for each azimuth angle for each LiDAR
 - PRA attack (prior work) can only work on 1st Gen (VLP-16)

Modeling HFR attack capability

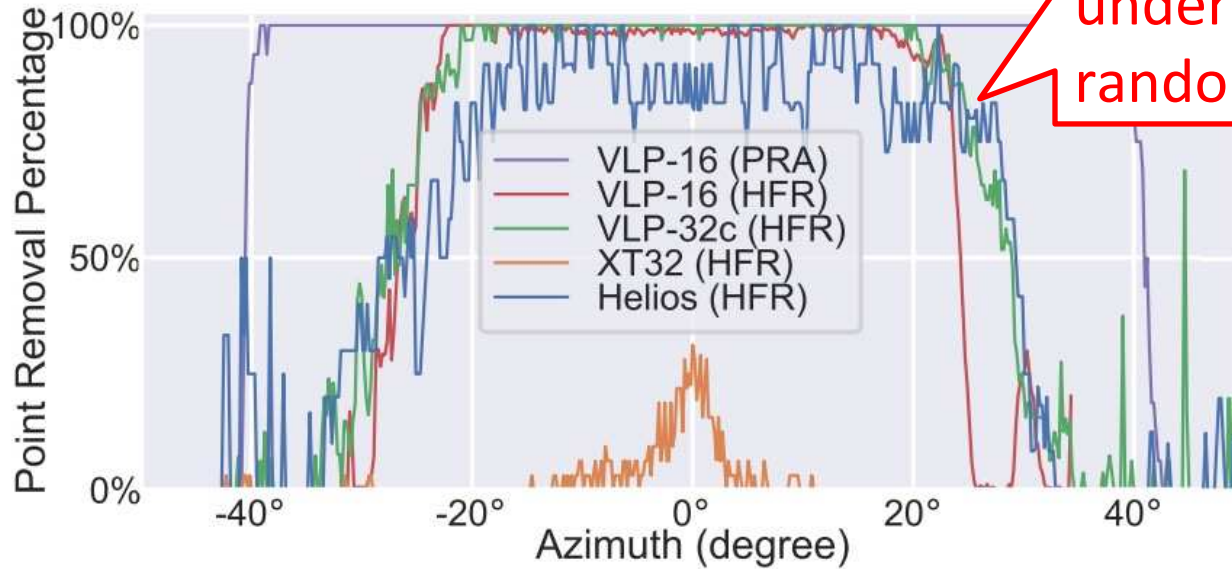


- Measure removal success rates for each azimuth angle for each LiDAR
 - PRA attack (prior work) can only work on 1st Gen (VLP-16)

Modeling HFR attack capability

HFR attack is effective even under timing randomization

Fingerprinting is effective mitigation for HFR attack

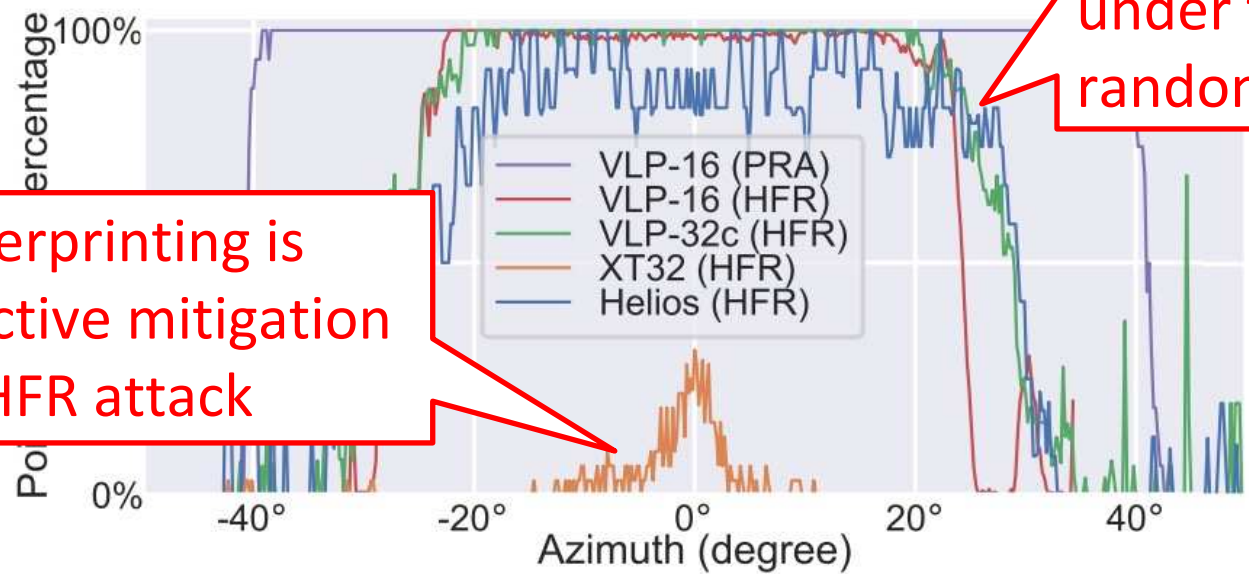


- Measure removal success rates for each azimuth angle for each LiDAR
 - PRA attack (prior work) can only work on 1st Gen (VLP-16)

Modeling HFR attack capability


HFR attack is effective even under timing randomization

Fingerprinting is effective mitigation for HFR attack

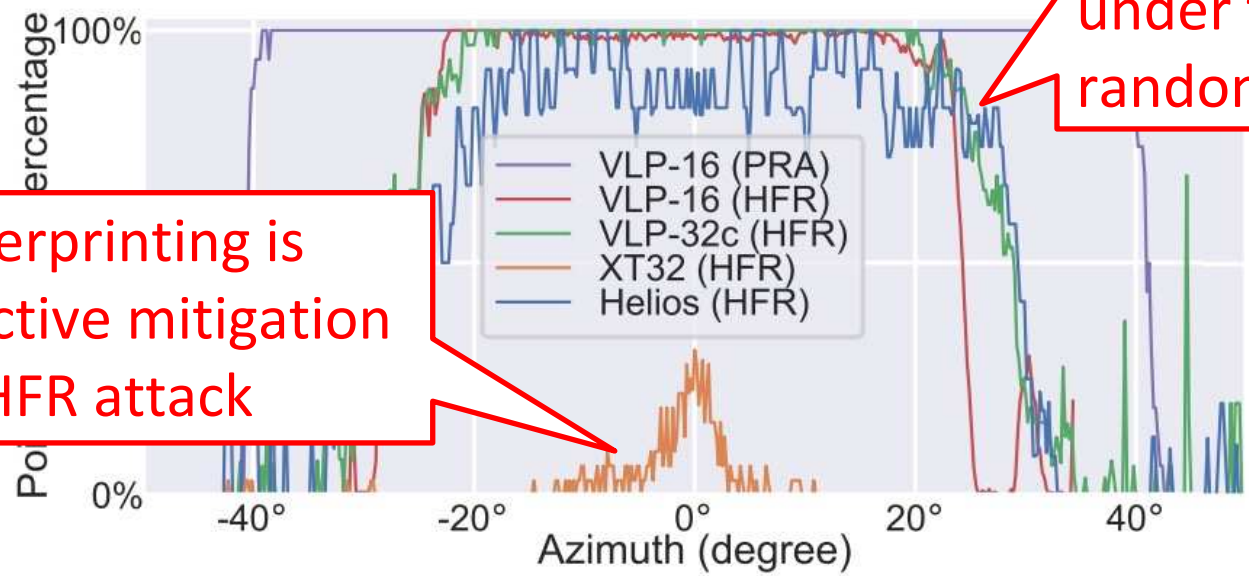

- Measure removal success rates for each azimuth angle for each LiDAR
 - PRA attack (prior work) can only work on 1st Gen (VLP-16)

Our observations on XT32's Fingerprinting


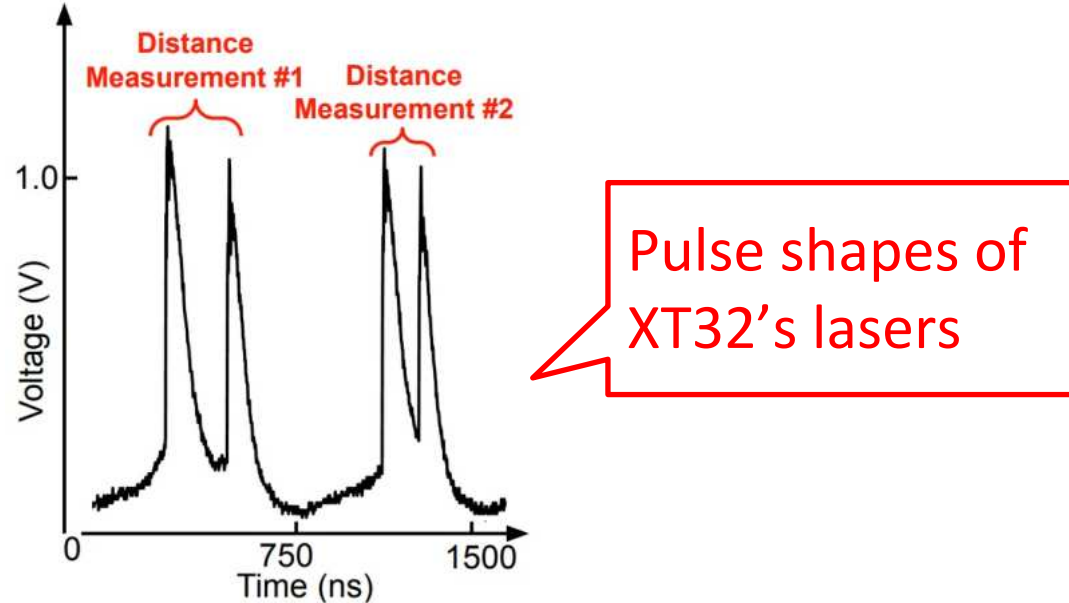


- XT32 emits couple of lasers for each point measurement
- We suspect that the fingerprinting is embedded in the interval
 - High freq. lasers may sometimes hit the interval
 - No official documentation is available on this

HFR attack evaluation in AD Scenarios

Benign

HFR attack on LiDAR w/ timing rand.

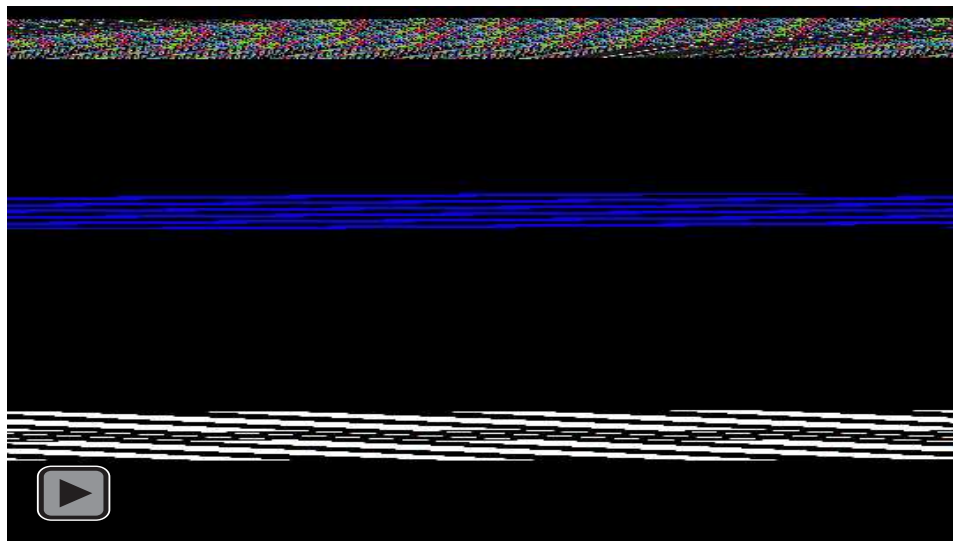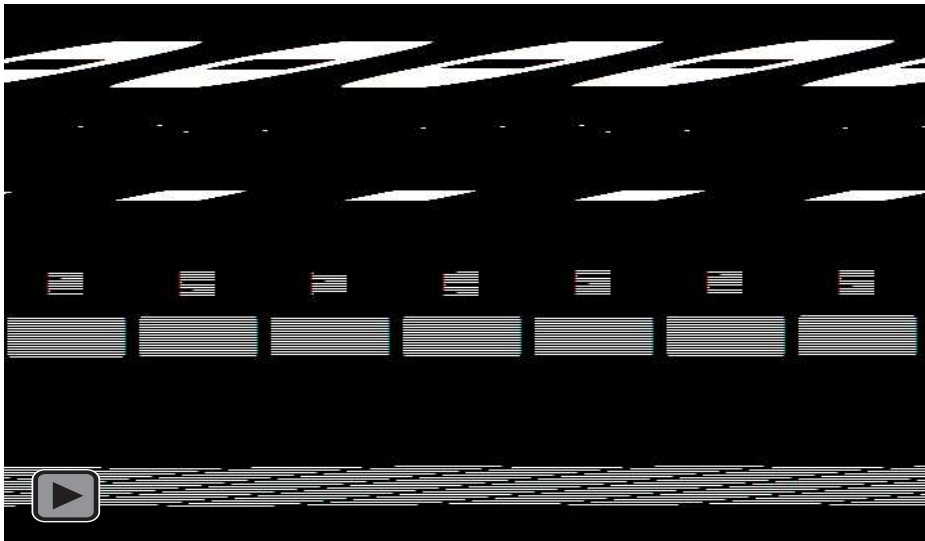

- AD Stack: Apollo 7.0

(x2 faster)

- Simulator: LGSVL

- Speed: 40 km/h

- Attack Model: Helios (HFR)



- Attack starts at 20 m away from the obstacle (sedan car)

(x2 faster)

HFR attack evaluation in AD Scenarios

Benign

HFR attack on LiDAR w/ timing rand.

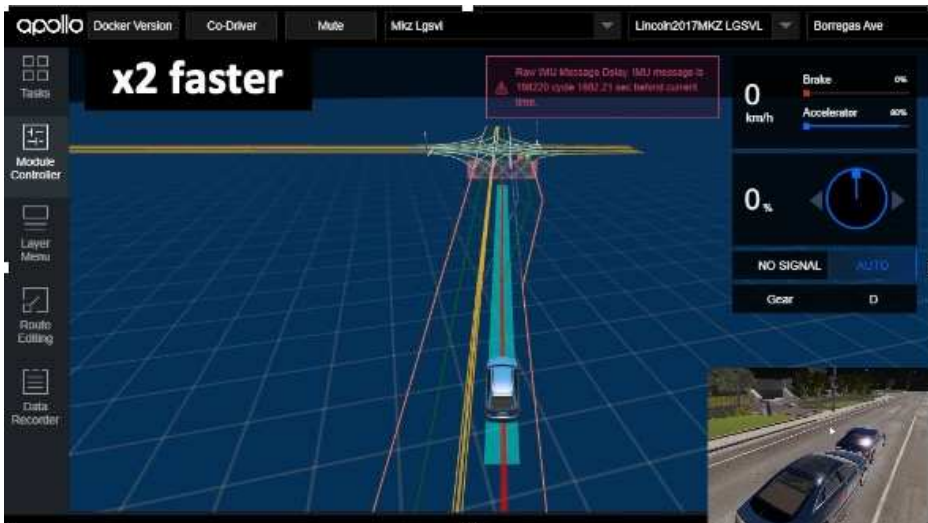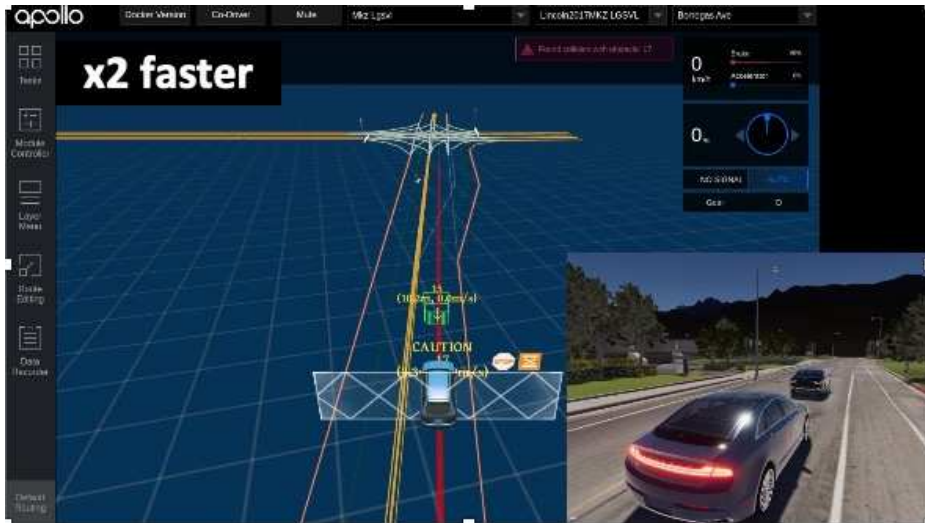


- AD Stack: Apollo 7.0
- Simulator: LGSVL
- Speed: 40 km/h
- Attack Model: Helios (HFR)
- Attack starts at 20 m away from the obstacle (sedan car)

Other findings

Attack Device Improvements

- Our new attack device can achieve inject >6k points in >80°
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

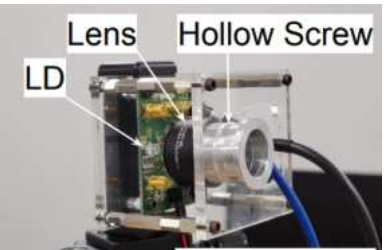


New-Gen LiDAR Measurements & Attack Modeling

Injection Attack

- CPI attack is **feasible only on VLP-16**
- **Pulse fingerprinting is not strong enough** to perfectly prevent injection
- **Error modeling** has major impact

Removal Attack

- **Latest removal attack is not feasible** on New-Gen LiDARs
- **Our HFR attack can be effective** even against New-Gen LiDARs

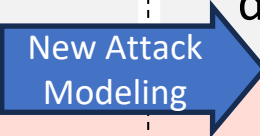

Security Analysis w/ 9 object detectors & AD Simulator (Autonomous Driving)


- **Pulse fingerprinting is effective mitigation** against injection attacks
- **Timing randomization is effective mitigation** against injection

- **Pulse fingerprinting is effective mitigation** against removal attacks
- Vulnerability of object detector heavily **depends on their training data**
- **HFR attack can be effective against autonomous driving scenarios**

Other findings

Attack Device Improvements

- Our new attack device can achieve inject >6k points in >80°
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

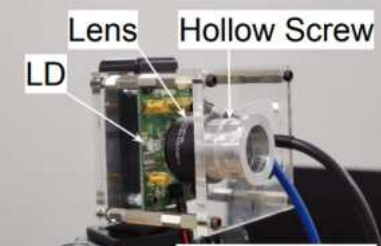

New-Gen LiDAR Measurements

Error modeling is important. Prior work's model is not accurate [Hallyburton et al., 2022]


enough to perfectly prevent injection

- **Error modeling** has major impact

Removal Attack

- **Latest removal attack is not feasible** on New-Gen LiDARs
- **Our HFR attack can be effective** even against New-Gen LiDARs

Security Analysis w/ 9 object detectors & AD Simulator (Autonomous Driving)




- **Pulse fingerprinting is effective mitigation** against injection attacks
- **Timing randomization is effective mitigation** against injection

- **Pulse fingerprinting is effective mitigation** against removal attacks
- Vulnerability of object detector heavily **depends on their training data**
- **HFR attack can be effective** against autonomous driving scenarios

Other findings

Attack Device Improvements

- Our new attack device can achieve inject >6k points in >80°
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

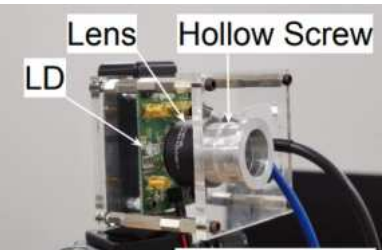

New-Gen LiDAR & Att

Injection At

- CPI attack is
- **Pulse fingerprinting is not strong enough** to perfectly prevent injection
- **Error modeling** has major impact

Removal Attack

- **Latest removal attack is not feasible** on New-Gen LiDARs
- **Our HFR attack can be effective** even against New-Gen LiDARs

Timing randomization is effective mitigation strategy both for injection and removal attack

ysis w/ 9 object AD Simulator (omous Driving)


- **Timing is effective** mitigation against injection attacks
- **Timing randomization is effective mitigation** against injection

- **Pulse fingerprinting is effective mitigation** against removal attacks
- Vulnerability of object detector heavily **depends on their training data**
- **HFR attack can be effective** against autonomous driving scenarios

Other findings

Attack Device Improvements

- Our new attack device can achieve inject >6k points in >80°
- **CPI attack is feasible** on VLP-16 with our device
- Model-level vulnerability may not be necessary to attack object detector

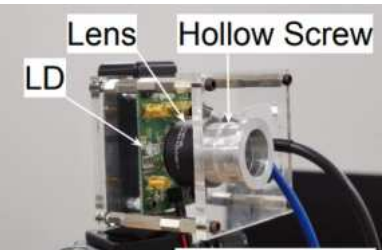


New-Gen LiDAR Measurements & Attack Modeling

Injection Attack

- CPI attack
- **Pulse fine enough to**
- **Error mo**

Removal

- **Latest re feasible on New-Gen LiDARs**
- **Our HFR attack can be effective even against New-Gen LiDARs**

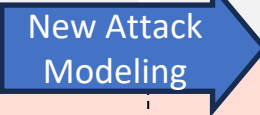

Selection of training data is important. Some model is very sensitive to small number of points.

Security Analysis w/ 9 object detectors & AD Simulator (Autonomous Driving)

Fingerprinting is effective on against injection attacks
Randomization is effective on against injection

Fingerprinting is effective mitigation against removal attacks
Vulnerability of object detector heavily depends on their training data
HFR attack can be effective against autonomous driving scenarios

Conclusion

- **First large-scale measurement study on New-Gen LiDARs**
 - Uncover **15 novel research findings**
 - Significantly **improve spoofing capability** with enhanced optics and electronics
 - Show that **common assumptions in 1st Gen LiDARs do not hold on New-Gen**
- **Design more accurate attack modeling of LiDAR spoofing attacks**
 - Model attack capabilities **both for injection and removal attacks**
 - Evaluate **3 major object detectors** trained on **5 datasets** with the attack models
 - Identify that **timing randomization** and **pulse fingerprinting** have **high mitigation capability** against LiDAR spoofing attacks
- **Design first practical black-box removal attack on New-Gen LiDARs**
 - **HFR** shows **high effectiveness** on New-Gen LiDARs with **timing randomization**
- **Performed Responsible Vulnerability Disclosure**
 - Informed **7 LiDAR suppliers** and **3 AD companies**. **5** are investigating our report

Thank you!

*For demos, data & other details,
Please visit our project website:*

<https://sites.google.com/view/cav-sec/new-gen-lidar-sec>

or

Contact me, Takami Sato <takamis@uci.edu>



AS²Guard

Autonomous & Smart Systems
Guard Research Group

UCI

